


# KPMB-2300L series MECHANICAL Buzzer







## DIMENSIONS



color Black  
ABS Housing Material  
Lead Terminal

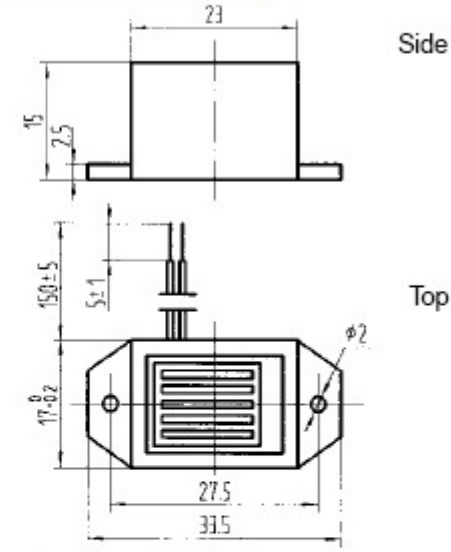

all dimensions are in mm

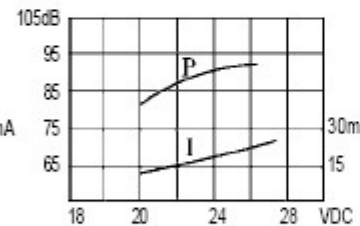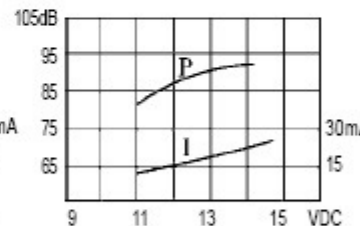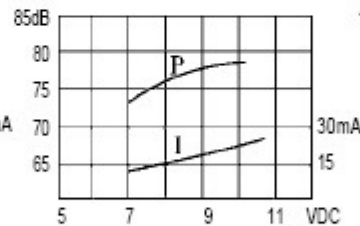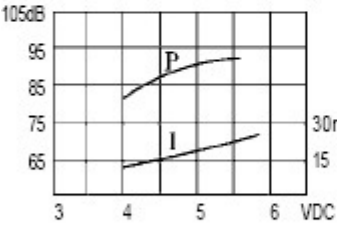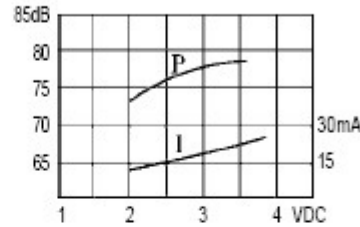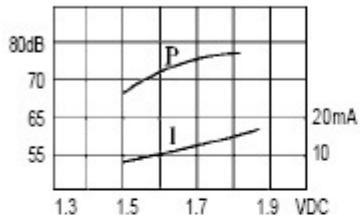

Model No	KPMB-2315L	KPMB-2303L	KPMB-2306L	KPMB-2309L	KPMB-2312L	KPMB-2324L
Rated Voltage	1.5 VDC	3VDC	6VDC	9VDC	12VDC	24VDC
Operating Voltage	1.3~2VDC	2~4VDC	4~8VDC	6~12VDC	9~15VDC	15~27VDC
Max. Rated Current	20mA at 1.5VDC	25mA at 3VDC	25mA at 6VDC	25mA at 9VDC	25mA at 12VDC	25mA at 24VDC
Min. Sound Pressure Level	70dB at 1.5VDC/20cm	75dB at 3VDC/20cm	75dB at 6VDC/20cm	75dB at 9VDC / 20cm	75dB at 12VDC/20cm	75dB at 24VDC/20cm
Resonant Frequency	400 <sub>j</sub> Å100Hz	400 <sub>j</sub> Å100Hz	400 <sub>j</sub> Å100Hz	400 <sub>j</sub> Å100Hz	400 <sub>j</sub> Å100Hz	400 <sub>j</sub> Å100Hz
Operating Temperature	-20~+60jæ	-20~+60jæ	-20~+60jæ	-20~+60jæ	-20~+60jæ	-20~+60jæ
Weight	10g	10g	10	10g	10g	10g