

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 10/22/09'	~	


NOTES:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000MΩ Min.
- MECHANICAL CHARACTERISTICS:
  - CONTACT RETENTION FORCE: 500gf Min.
- ENVIRONMENT CHARACTERISTICS:
  - OPERATING TEMPERATURE: 0°C~+85°C.
  - STORAGE TEMPERATURE: -20°C~+70°C.


4. PRODUCT NUMBER CODE:

DS1023- X X X X

- X: PROFILE HEIGHT(DIM A)  
1: 8.5mm
- X: CONTACT PLATING  
0: SELETIVE GOLD FLASH  
F1: FULL GOLD FLASH
- X: MOUNTIING TYPE  
S: Straight TYPE
- X: No.OF CONTACTS  
1\*1-1\*40  
2\*2-2\*40

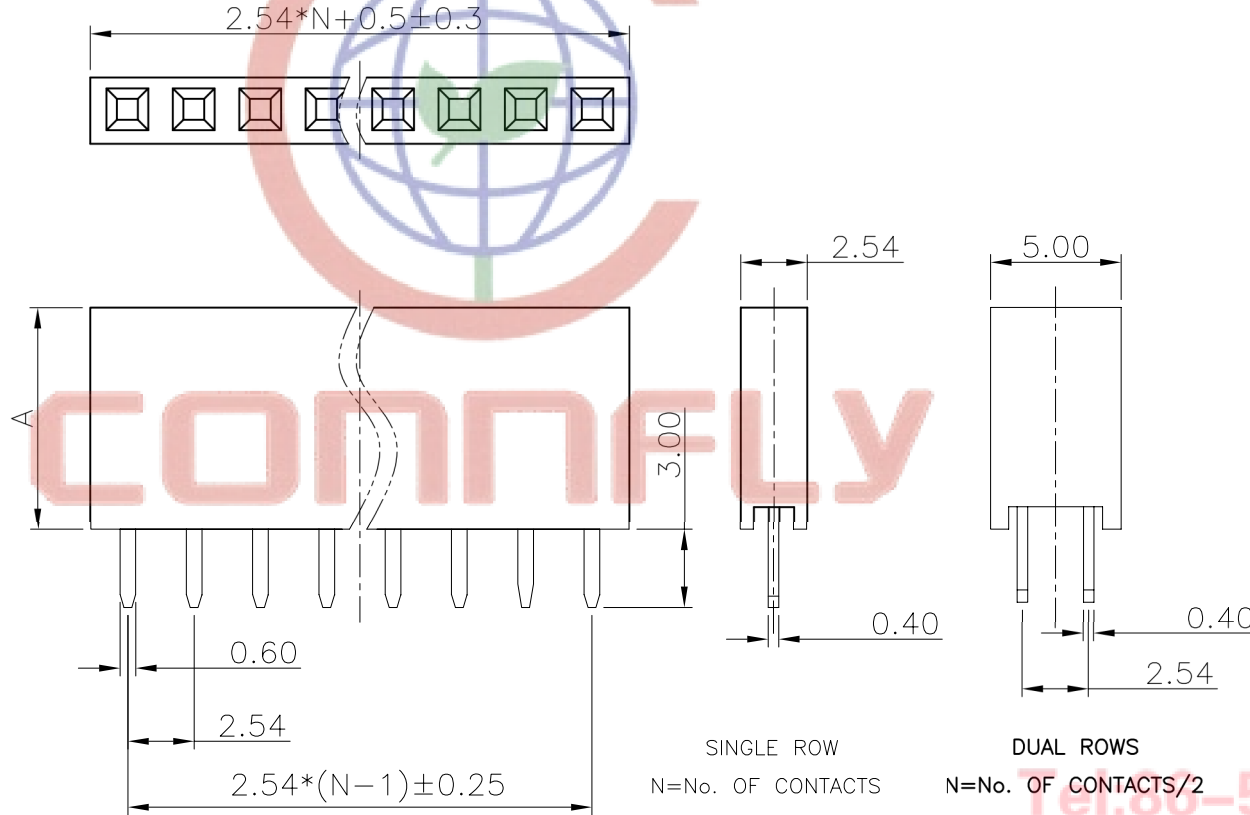

Tel:86-574-63508787  
 Fax:86-574-63510817  
 E-mail:sale@zhenqin.com.cn

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	⊕	TITLE	FEMALT HEADER PITCH		
X. ±0.60	X. ±5°	UNITS	mm	2.54mm	V/T SINGLE/DUAL ROWS TYPE		
.X ±0.38	.X ±3°	SHEET SIZE	A4	SERIES	DS1023 SERIES		
.XX ±0.25	.XX ±2°						
DRAWING TYPE	CUSTOMER	 <b>晨翔电子有限公司</b> <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>					
SCALE	1:1					SHEET	1 OF 1
DRAWING NO.	C-DS1023-XXX1-A						