



## 0705 KSS Strain Relief Bushing



- Material: UL approved Nylon 66, 94V-2.
- Color: Black.
- Cust assembly cost, prolongs cords life. Used extensively for protecting cords of computer, apparatus...etc.

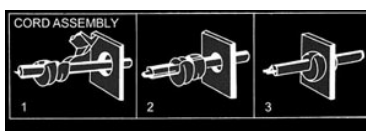

Unit: mm

	Cross Section Shape	Item No.	Wires Accommodate		Mounting Hole		Part Length	Available Thickness	Packing
			UL Wire	Size	A	B	D	F	
	Flat	<input type="checkbox"/> SR-F21	SPT-1#18	2.3x4.5 2.8x5.3	9.5	8.7	10.3	0.5 ~ 1.6	100 pcs / Bag
		<input type="checkbox"/> SR-F23	SPT-1#18	2.3x4.5 2.8x5.3	9.5	8.7	10.3	1.8 ~ 3.2	
		<input type="checkbox"/> SR-F31	SPT-1#18	3.0x5.6	11.2	9.9	10.3	1.0 ~ 1.6	
		<input type="checkbox"/> SR-F32	SPT-1#18	3.0x5.6	11.0	9.9	10.3	1.9 ~ 2.5	
		<input type="checkbox"/> SR-F41	SPT-2#18	3.0x7.1 3.8x7.6	12.7	11.8	10.3	0.5 ~ 1.6	
		<input type="checkbox"/> SR-F42	SPT-2#18	3.0x7.1 3.8x7.6	12.7	11.8	10.3	1.8 ~ 2.5	
		<input type="checkbox"/> SR-F51	SPT-3#18	5.0x10.4	14.3	12.9	15.2	0.5 ~ 1.6	
		<input type="checkbox"/> SR-F53	SPT-3#18	5.0x10.4	14.3	12.9	15.2	1.8 ~ 3.5	
		<input type="checkbox"/> SR-F83	Alt Condition Wire 3C 2mm2	6.0x13.0	21.6	21.3	20.4	20.0 ~ 3.4	
	Round	<input type="checkbox"/> SR-5R1	SVI, SVT 3C#18	6.2Φ~7.4Φ	12.8	11.5	11.0	0.5 ~ 1.6	
		<input type="checkbox"/> SR-5R2	SVI, SVT 3C#18	6.2Φ~7.4Φ	13.0	11.5	11.0	1.8 ~ 2.5	
		<input type="checkbox"/> SR-6W2	SJT 3C#18	7.6Φ	12.7	11.8	11.0	1.8 ~ 2.3	
		<input type="checkbox"/> SR-6P1	SJT 3C#18	7.4Φ~8.2Φ	15.9	14.0	14.8	0.5 ~ 1.6	
		<input type="checkbox"/> SR-6P3	SJT 3C#18	7.4Φ~8.2Φ	15.9	14.0	14.8	1.9 ~ 3.2	
		<input type="checkbox"/> SR-6R1	SJ, SJT 3C#16	8.2Φ~9.2Φ	15.9	14.0	14.8	0.5 ~ 1.6	
		<input type="checkbox"/> SR-6R3	SJ, SJT 3C#16	8.2Φ~9.2Φ	15.9	14.0	14.8	1.9 ~ 3.2	
		<input type="checkbox"/> SR-7R1	SJT 3C#14	9.2Φ~10.5Φ 11Φ	19.9	17.0	19.0	0.5 ~ 1.6	
		<input type="checkbox"/> SR-7R3	SJT 3C#14	9.2Φ~10.5Φ 11Φ	19.7	17.0	19.0	1.9 ~ 3.2	
		<input type="checkbox"/> SR-8R3	SJT 3C#12	12.0Φ~15.2Φ	21.6	21.3	20.6	1.9 ~ 3.2	
		<input type="checkbox"/> SR-9R1	#18 20~30 pcs	11.0Φ~15.0Φ	15.0	19.0	17.5	0.5 ~ 1.6	
		<input type="checkbox"/> SR-9R7	SJT 3C#10	9.2Φ~10.5Φ 11Φ	28.0/30.2	25.5	25.2	1.0 ~ 3.2	