

COMPACT POWER RELAY

1 POLE - 25/30A

(for automotive applications)

FBR51, 52 Series

■ FEATURES

- Compact and light weight structure
- High current contact capacity
(carrying current: 35 A/10 minutes, 30 A/1 hour)
- High resistance to vibration and shock
- Improved heat resistance and extended operation range
- Two contact gap options
(FBR51: 0.3 mm, FBR52: 0.6 mm)
- Three types of contact material



■ PARTNUMBER INFORMATION

[Example] $\frac{\text{FBR51}}{\text{(a)}}$ $\frac{\text{N}}{\text{(b)}}$ $\frac{\text{D12}}{\text{(c)}}$ - $\frac{\text{W1}}{\text{(d)}}$

(a)	Relay type	FBR51 : FBR51-Series - Standard type (contact gap 0.3mm) FBR52 : FBR52-Series - Wide contact gap type (contact gap 0.6mm)
(b)	Enclosure	N : Plastic sealed type
(c)	Coil rated voltage	D12 : 6.....12 VDC Coil rating table at page 3
(d)	Contact material	W1 : Silver-tin oxide indium (high power type, 1 form C) WL : Silver-tin oxide indium (lamp loads, see application table, 1 form A) WF : Silver-tin oxide indium (flasher loads, 1 form A)

Actual marking does not carry the type name: "FBR"

E.g.: Ordering code: FBR51ND12-W1 Actual marking: 51ND12-W1

FBR51, 52 SERIES

■ SPECIFICATION

Item			Characteristics	Remarks
			W1 contact	
Contact Data	Configuration		1 form C (SPDT)	
	Material		AgSnO ₂ In (high capacity type)	
	Voltage drop (initial)		Max. 100mV	At 1A/12VDC
	Contact rating		25A, 14VDC	At locked motor load
	Max. carrying current		35A / 10 minutes, 30A / 1hr	At 25 °C with nominal coil voltage
	Max. inrush current (reference)		60A	
	Max. switching voltage (reference)		16VDC	
	Max. switching current (reference)		35A	
	Min. switching load (reference) *		1A, 6 VDC	
Life	Mechanical		Min. 10 x 10 ⁶ operations	
	Electrical		Min. 200 x 10 ³ operations	At contact rating, locked motor load
Coil Data	Operating temperature range		-40 °C to +85 °C (At long continuous carry current conditions, refer to "operating coil voltage range" on page 7)	No frost (or freezing)
	Storage temperature range		-40 °C to +100 °C	
Timing Data	Operate		Max. 10 ms (no diode, excluding bounce)	At nominal coil voltage
	Release		Max. 5 ms (no diode, excluding bounce)	At nominal coil voltage
Other	Vibration resistance	Misoperation	10 to 200Hz, acceleration 43m/s ² (4.4G), constant acceleration	For 3 directions, totally 6 cycles, with/without coil energizing
		Endurance	10 to 200Hz, acceleration 43m/s ² (4.4G), constant acceleration	For 3 directions, totally 6 hours, without coil energizing
	Shock resistance	Misoperation	100m/s ² (11±1ms)	For 3 directions, totally 36 times, with/ without coil energizing
		Endurance	1,000m/s ² (6±1ms)	For 3 directions, totally 18 times, without coil energizing
	Weight		Approximately 6 g	

* Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

FBR51, 52 SERIES

■ SPECIFICATION

Item	Characteristics		Remarks
	WF contact	WL contact	
Contact Data	Configuration	1 form A (SPST)	
	Material	AgSnO ₂ In (For flasher)	AgSnO ₂ In (For lamp)
	Voltage drop (initial)	Max. 100mV	
	Contact rating	14VDC, 80W	14VDC, 120W
	Max. carrying current	35A / 10 minutes, 30A / 1hr	
	Max. inrush current (reference)	80A	
	Max. switching voltage (reference)	16VDC	
	Max. switching current (reference)	35A	
	Min. switching load (reference) *	1A, 6 VDC	
Life	Mechanical	Min. 10 x 10 ⁶ operations	
	Electrical	Min. 2.5 x 10 ⁶ operations (0.35 sec - ON/0.35 sec - OFF)	Min. 100x 10 ³ operations
Coil data	Operating temperature range	-40 °C to +85 °C (At long continuous carry current conditions, refer to "operating coil voltage range" on page 8)	
	Storage temperature range	-40 °C to +100 °C	
Timing Data	Operate	Max. 10 ms (no diode, excluding bounce)	
	Release	Max. 5 ms (no diode, excluding bounce)	
Other	Vibration resistance	Misoperation	10 to 200Hz, acceleration 43m/ s ² (4.4G), constant acceleration
		Endurance	10 to 200Hz, acceleration 43m/ s ² (4.4G), constant acceleration
	Shock resistance	Misoperation	100m/s ² (11±1ms)
		Endurance	1,000m/s ² (6±1ms)
	Weight	Approximately 6 g	

* Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

FBR51, 52 SERIES

■ COIL RATING

FBR51 Series

Coil Code	Rated Coil Voltage (VDC)	Coil Resistance +/- 10% (Ohm)	Must Operate Voltage (VDC) *	Must Release Voltage (VDC) *
D06	6	60	3.6 (at 20 °C)	0.5 (at 20 °C)
			4.5 (at 85 °C)	0.7 (at 85 °C)
D09	9	135	5.4 (at 20 °C)	0.7 (at 20 °C)
			6.8 (at 85 °C)	0.9 (at 85 °C)
D10	10	180	6.3 (at 20 °C)	0.8 (at 20 °C)
			7.9 (at 85 °C)	1.0 (at 85 °C)
D12	12	240	7.3 (at 20 °C)	1.0 (at 20 °C)
			9.2 (at 85 °C)	1.3 (at 85 °C)

FBR52 Series

Coil Code	Rated Coil Voltage (VDC)	Coil Resistance +/- 10% (Ohm)	Must Operate Voltage (VDC) *	Must Release Voltage (VDC) *
D06	6	45	3.6 (at 20 °C)	0.5 (at 20 °C)
			4.5 (at 85 °C)	0.7 (at 85 °C)
D09	9	100	5.4 (at 20 °C)	0.7 (at 20 °C)
			6.8 (at 85 °C)	0.9 (at 85 °C)
D10	10	135	6.3 (at 20 °C)	0.8 (at 20 °C)
			7.9 (at 85 °C)	1.0 (at 85 °C)
D12	12	180	7.3 (at 20 °C)	1.0 (at 20 °C)
			9.2 (at 85 °C)	1.3 (at 85 °C)

Note: Coil resistance values in the tables are valid for 20°C.
* Specified operate values are valid for pulse wave voltage.


FBR51, 52 SERIES

CHARACTERISTIC DATA (Reference)


Life test (example)

- Test item
25A 14VDC
motor lock 200,000
operations minimum
(FBR52N()-W1 type)


- Test circuit



Operate/release voltage

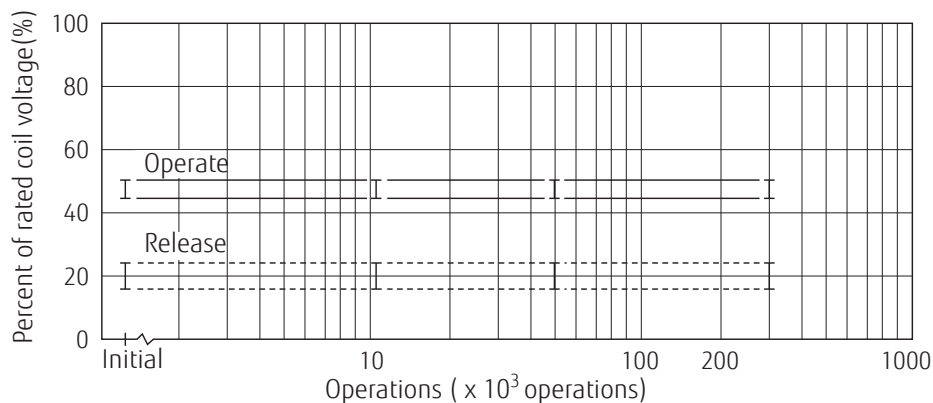


- Current wave form




Contact resistance

(measured at 6VDC 1A wet)

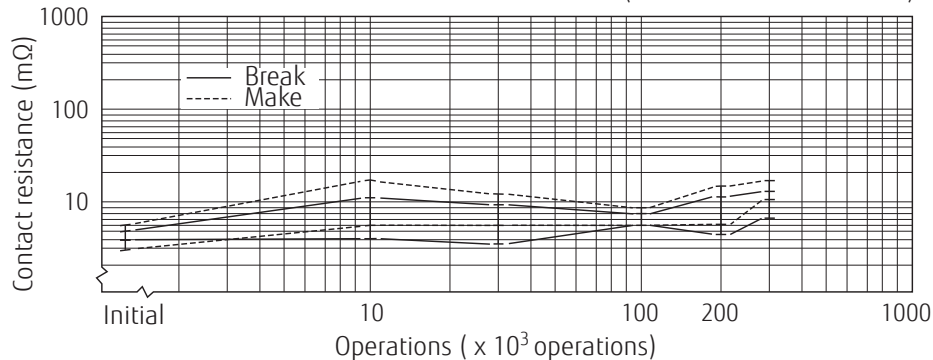


- Test item
20A 14VDC
motor free 400,000
operations minimum
(FBR51N()-W1 type)


- Test circuit



Operate/release voltage

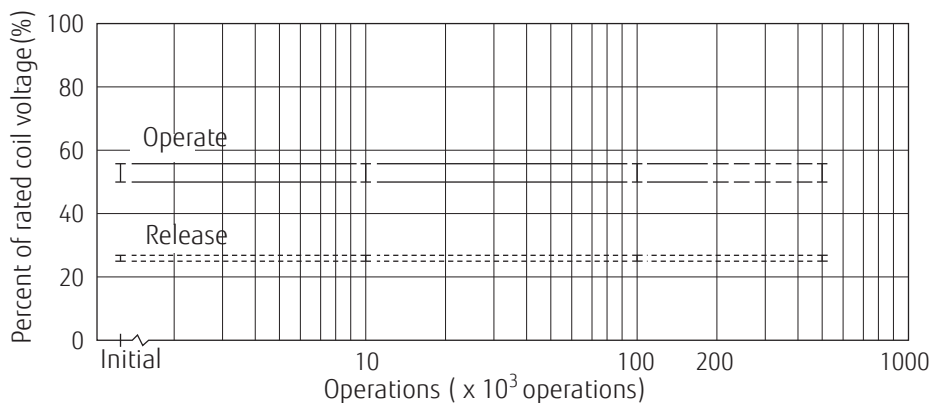


- Current wave form



Contact resistance

(measured at 6VDC 1A wet)

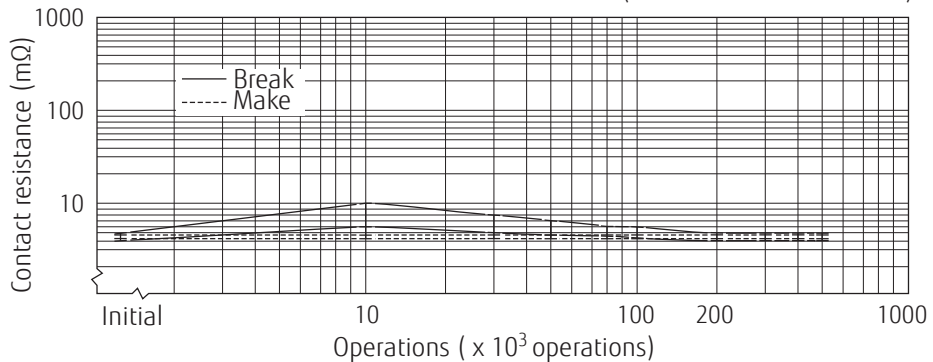


FBR51, 52 SERIES



Life test (example)

- Test item
Inrush 80A 14VDC
lamp load 100,000
operations minimum
(FBR51N()-WL type)


- Test circuit



- Current wave form

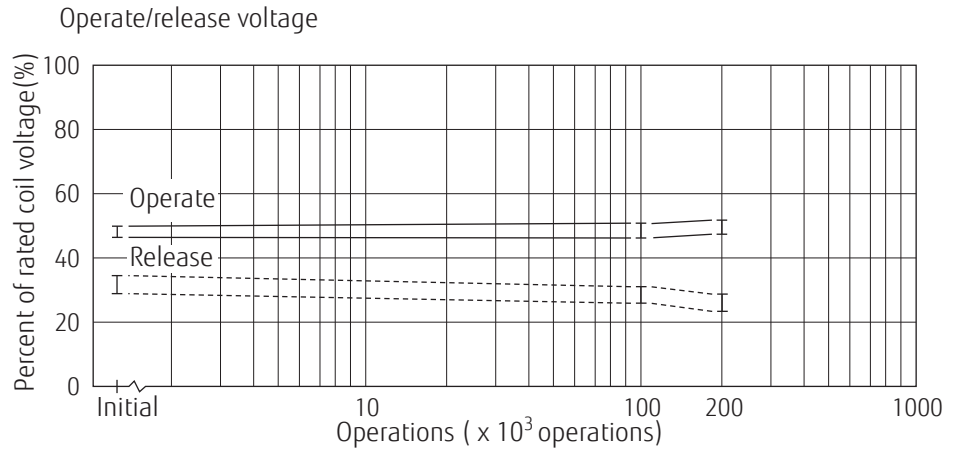


- Contact resistance

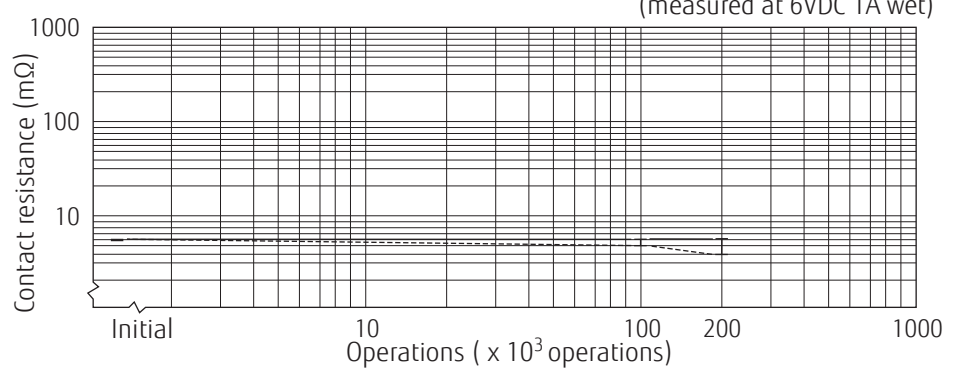


- Test item
Inrush 11A 14VDC
flasher, hazard lamp
(80W)load 2,500,000
operations minimum
(FBR51N()-WF type)


- Test circuit



- Current wave form

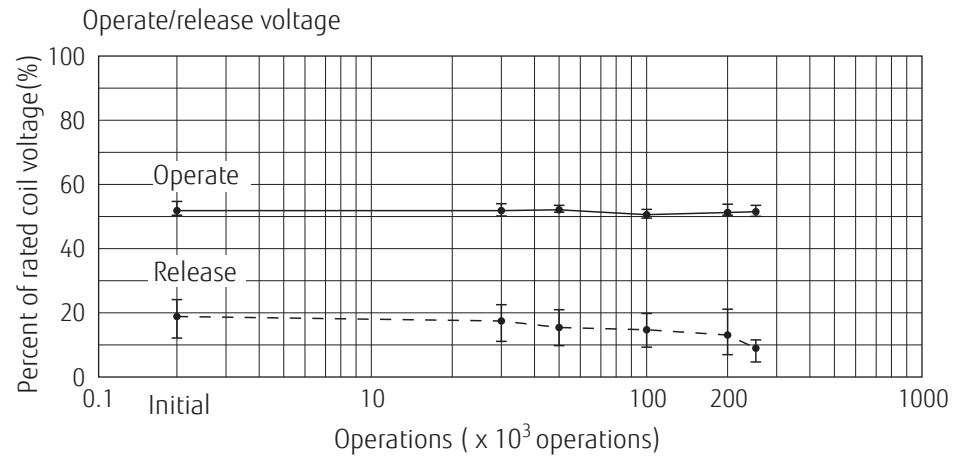


- Contact resistance


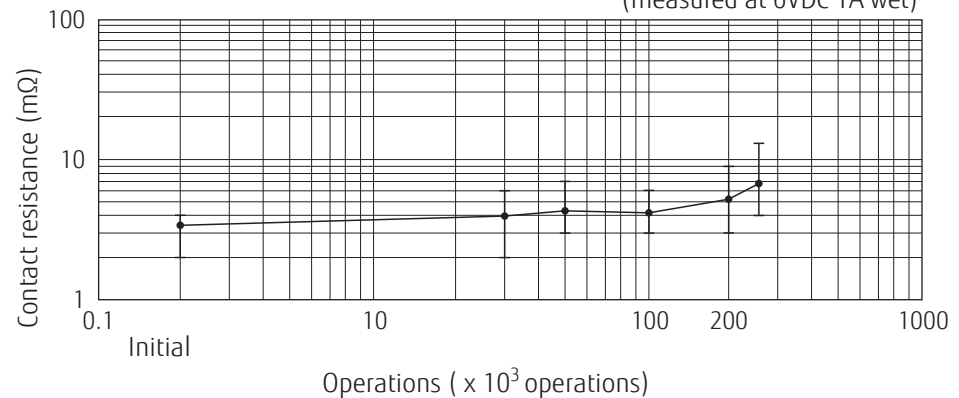


FBR51, 52 SERIES


Coil Temperature Rise

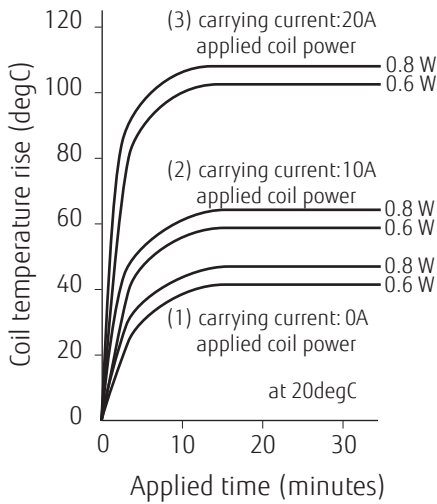


Operating Coil Voltage Range

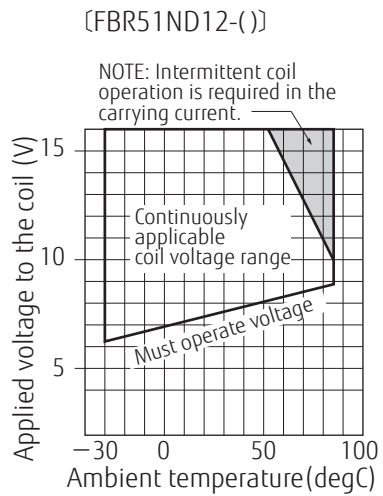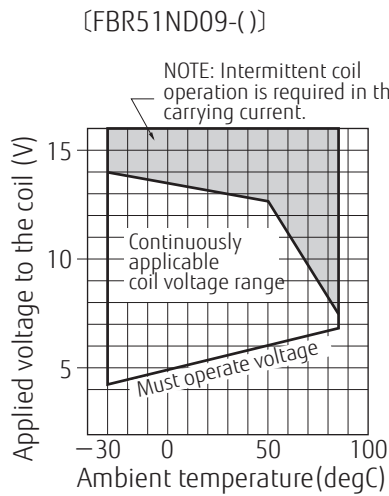


Coil Temperature Rise

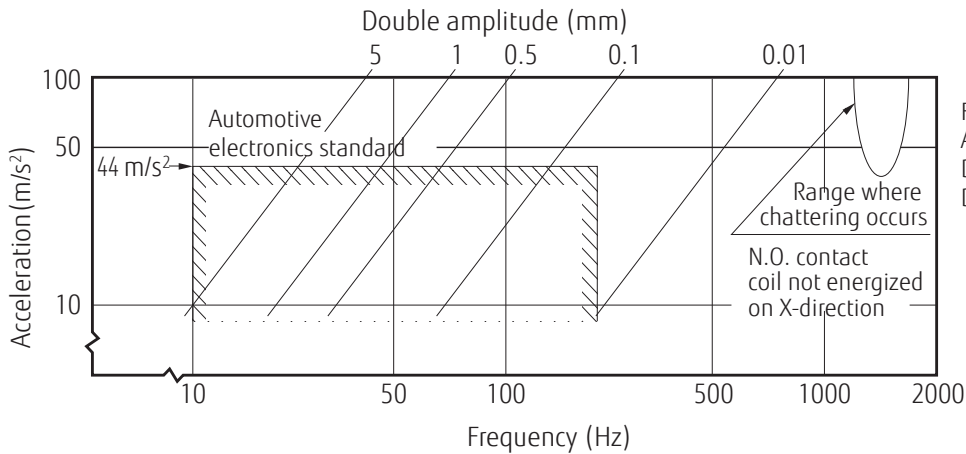

Frequency: 10 to 2000 Hz
 Acceleration: 100m/s² max.
 Direction of vibration: see under diagram
 Detection level: chatter >10micro-sec.




Shock Resistance Characteristics

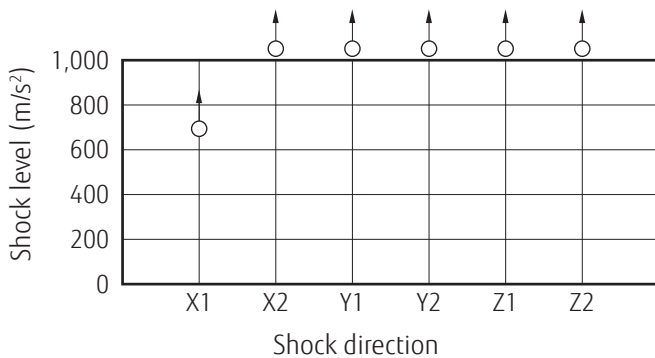


○: N.C.contact (coil de-energized)
 N.O.contact: min. 1,000m/s² in all directions

Shock application time: 11^{+/-1}ms, half-sine wave
 Test material: coil, energized and de-energized
 Shock direction: set under diagram
 Detection level: chatter > 100micro-sec.




FBR51, 52 SERIES

Maximum Switching Power

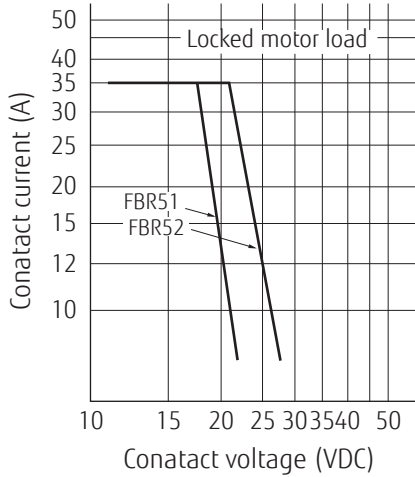


Live Curve

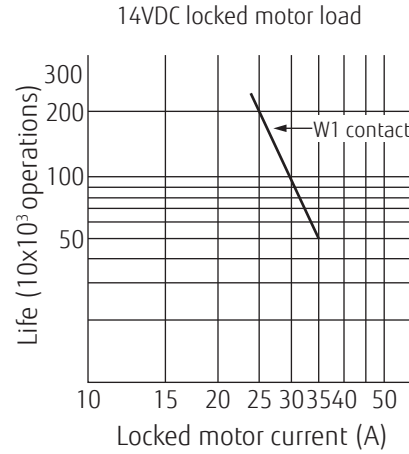


Initial Distributions data


Distribution of operate and release voltage

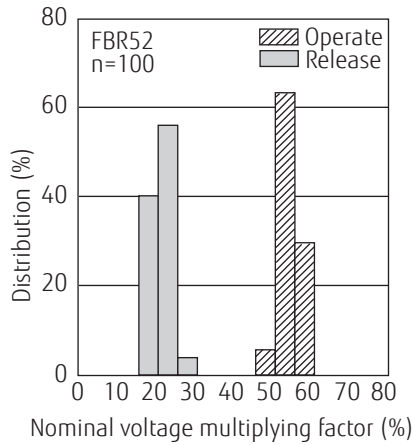

Distribution of operate and release time

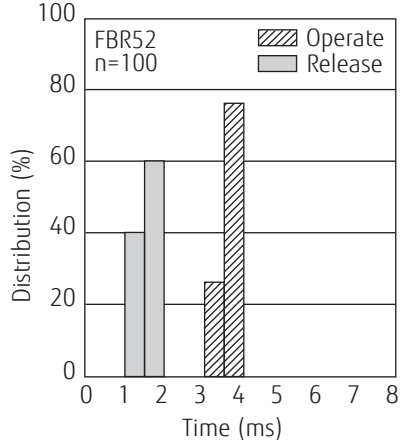



Distribution of contact resistance

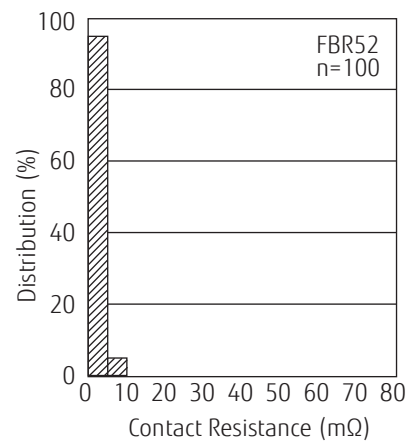

FBR51, 52 SERIES



■ DIMENSIONS

Dimensions

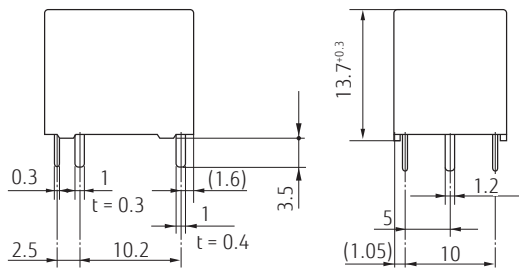


Note: Dimensions of the terminals does not includes thickness of pre-solder.

Schematics (BOTTOM VIEW)




Refer to the test circuit at CHARACTERISTIC DATA for connection, and polarity.



Refer to the test circuit at CHARACTERISTIC DATA for connection, and polarity.



PC board mounting hole layout (BOTTOM VIEW)




Tolerance: +/-0.1

Unit: mm

● Tube carrier (pokayoke)



45 pieces/tube



RoHS Compliance and Lead Free Information

1. General Information

- All relays produced by Fujitsu Components are compliant with RoHS directive 2011/65/EU including amendments.
- Cadmium as used in electrical contacts is exempted from the RoHS directives. As per Annex III of directive 2011/65/EU.
- All relays are lead-free. Please refer to Lead-Free Status Info for older date codes at: <http://www.fujitsu.com/downloads/MICRO/fcai/relays/lead-free-letter.pdf>
- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.

2. Recommended Lead Free Solder Condition


- Recommended solder Sn-3.0Ag-0.5Cu.

Flow Solder Condition:

Pre-heating: maximum 120°C within 90 sec.
Soldering: dip within 5 sec. at 255°C ± 5°C solder bath
Relay must be cooled by air immediately after soldering

Solder by Soldering Iron:

Soldering Iron 30-60W
Temperature: maximum 350-360°C
Duration: maximum 3 sec.

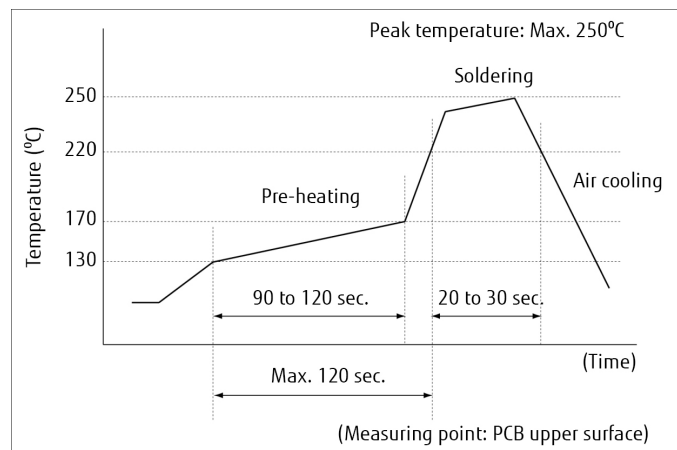

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

Fujitsu Components International Headquarter Offices

Japan FUJITSU COMPONENT LIMITED Shinagawa Seaside Park Tower 12-4, Higashi-shinagawa 4-chome, Shinagawa-ku, Tokyo, 140-0002, Japan Tel: (81-3) 3450-1682 Fax: (81-3) 3474-2385 Email: fcl-contact@cs.jp.fujitsu.com Web: www.fujitsu.com/jp/fcl/	Europe FUJITSU COMPONENTS EUROPE B.V. Diamantlaan 25 2132 WV Hoofddorp Netherlands Tel: (31-23) 5560910 Fax: (31-23) 5560950 Email: info@fceu.fujitsu.com Web: www.fujitsu.com/uk/components	China FUJITSU ELECTRONIC COMPONENTS (SHANGHAI) CO., LTD. Unit 4306, InterContinental Center 100 Yu Tong Road, Shanghai 200070, China Tel: (86-21) 3253 0998 Fax: (86-21) 3253 0997 Email: fcal@sg.fujitsu.com www.fujitsu.com/sg/products/devices/components/
North and South America FUJITSU COMPONENTS AMERICA, INC. 2290 North First Street, Suite 212 San Jose, CA 95131 USA Tel: (1-408) 745-4900 Fax: (1-408) 745-4970 Email: components@us.fujitsu.com Web: http://us.fujitsu.com/components	Asia Pacific FUJITSU COMPONENTS ASIA, LTD. 102E Pasir Panjang Road #01-01 Citilink Warehouse Complex, Singapore 118529 Tel: (65) 6375-8560 Fax: (65) 6273-3021 Email: fcal@sg.fujitsu.com www.fujitsu.com/sg/products/devices/components	Hong Kong FUJITSU COMPONENTS HONG KONG CO., LTD. Unit 506, Inter-Continental Plaza No.94 Granville Road, Tsim Sha Tsui, Kowloon, Hong Kong Tel: (852) 2881-8495 Tex: (852) 2894-9512 Email: fcal@sg.fujitsu.com www.fujitsu.com/sg/products/devices/components/

©2015 Fujitsu Components Europe B.V. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

The contents, data and information in this datasheet are provided by Fujitsu Component Ltd. as a service only to its user and only for general information purposes.

The use of the contents, data and information provided in this datasheet is at the users' own risk.

Fujitsu has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

Fujitsu Components Europe B.V. and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof.

Nor do Fujitsu Components Europe B.V. and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability for any representation or warrant of any kind, express or implied, including warranties of any kind for merchantability or fitness for particular use, with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. Nov 27, 2015