

LAS1 Series A Type $\Phi 22$ Pushbutton Switches



Specs Having three head shape: round($\Phi 25\text{mm}$), square($25 \times 25\text{mm}$), rectangular($25 \times 31\text{mm}$), containing pilot lamp, pushbutton and illuminated push button.

Functions The product has stable property, small contact resistance, strong insulation resistance, anti-vibration and so on. Meet standards of IEC60947-5-1, GB14048.5 etc.


Structure The switch units use fast-break structure, and each of them contains 1NO1NC. Every pushbutton can possess 2 units at most.

Feature Using veneering installation, the front frame of the product is only 2mm higher over the panel.


Protective Degree IP40 or IP65

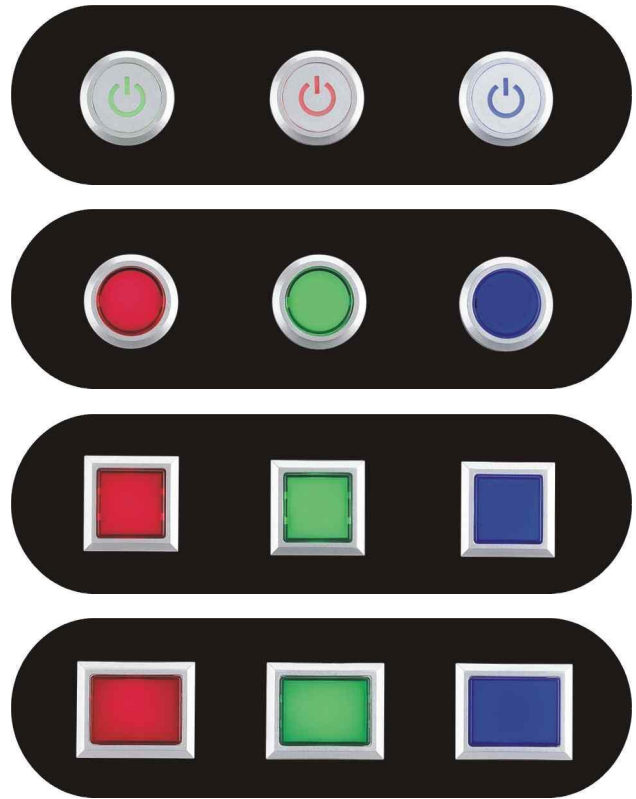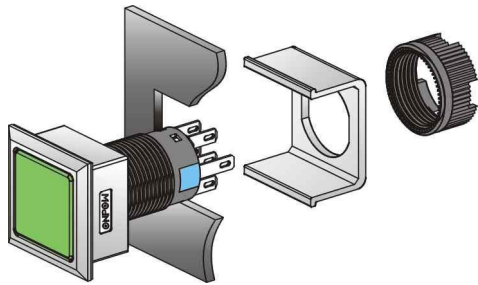


Installation Dimension



Round



Square

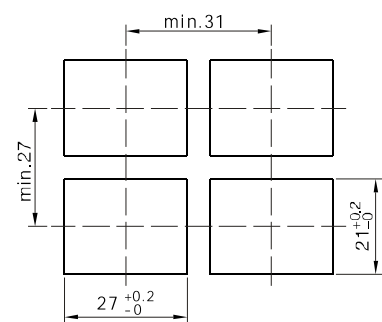


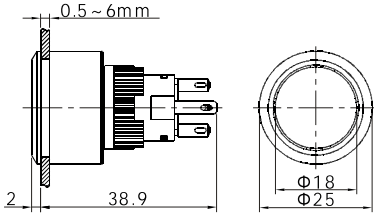



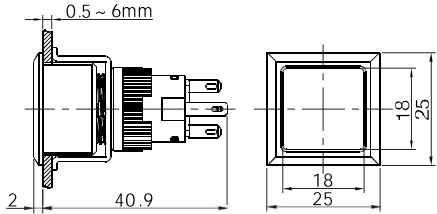




Rectangular

Implication of Type

LAS1-A	☆	★	-	□	■	○	/ △ /	▲ /	◎
Code of series	Code of variety: P black frame W silvery frame	The front shape: Y round F square J rectangular	Contact structure: 11 1NO1NC 22 2NO2NC	Operating type: D pilot lamp Z latching No letter means momentary	Type of illuminated symbol: T power sign No letter means normal type. Note: T type is special, just for round silvery frame. Other symbol can be made to order.	Color: R red G green Y yellow O orange B blue W white N black	Lamp voltage (Please check the lamp rating)	Protective degree: P IP65 No letter means IP40	

Note: Pls check other specification, lamp ratings, structure and terminal explanation from LAS1 series A type in ONPOW plastic products catalogue.

Product Outline

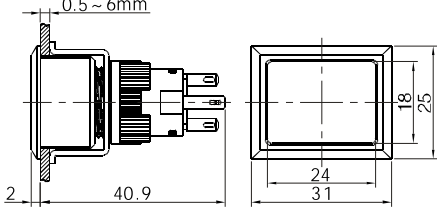Shape	Operating Type	Type Number		
Round(can be illuminated)  Black Frame	Pilot lamp	LAS1-APY-D/△/▲/◎	 <p>R G Y O B W N</p> <ul style="list-style-type: none"> ◎ The black cover can not be used for illuminated pushbutton. ◎ Protective Degree: IP40 and IP65 can be chosen. 	
	Momentary	LAS1-APY-□/△/▲/◎		
	Alternate	LAS1-APY-□Z/△/▲/◎		
Round(can be illuminated)  Silvery Frame	Pilot lamp	LAS1-AWY-D/△/▲/◎		
	Momentary	LAS1-AWY-□/△/▲/◎		
	Alternate	LAS1-AWY-□Z/△/▲/◎		
Round(can be illuminated)  Silvery Frame	Pilot lamp	LAS1-AWY-DT/△/▲/◎		
	Momentary	LAS1-AWY-□T/△/▲/◎		
	Alternate	LAS1-AWY-□ZT/△/▲/◎		
Square(can be illuminated)  Black Frame	Pilot lamp	LAS1-APF-D/△/▲/◎	 <p>R G Y O B W N</p> <ul style="list-style-type: none"> ◎ The black cover can not be used for illuminated pushbutton. ◎ Protective Degree: IP40 and IP65 can be chosen. 	
	Momentary	LAS1-APF-□/△/▲/◎		
	Alternate	LAS1-APF-□Z/△/▲/◎		
Square(can be illuminated)  Silvery Frame	Pilot lamp	LAS1-AWF-D/△/▲/◎		
	Momentary	LAS1-AWF-□/△/▲/◎		
	Alternate	LAS1-AWF-□Z/△/▲/◎		
Rectangular(can be illuminated)  Black Frame	Pilot lamp	LAS1-APJ-D/△/▲/◎		 <p>R G Y O B W N</p> <ul style="list-style-type: none"> ◎ The black cover can not be used for illuminated pushbutton. ◎ Protective Degree: IP40 and IP65 can be chosen.
	Momentary	LAS1-APJ-□/△/▲/◎		
	Alternate	LAS1-APJ-□Z/△/▲/◎		
Rectangular(can be illuminated)  Silvery Frame	Pilot lamp	LAS1-AWJ-D/△/▲/◎		
	Momentary	LAS1-AWJ-□/△/▲/◎		
	Alternate	LAS1-AWJ-□Z/△/▲/◎		