


25.431. \*



**Material**

Insulator:PA  
Body:Brass  
Surface:Nickel plated  
\*Solder connection

**Rated voltage/current**  
30Vac-60Vdc/Max.24A




25.502. \*



**Material**

Insulator:PA  
Body:Brass  
Spring:Beryllium copper  
Surface:Nickel plated  
\*Solder connection

**Rated voltage/current**  
CATII 1000V/Max.32A




25.450. \*



**Material**

Insulator:PA  
Body:Brass  
Spring:Beryllium copper  
Surface:Nickel plated  
\*Solder connection

**Rated voltage/current**  
CATII 600V/Max.32A

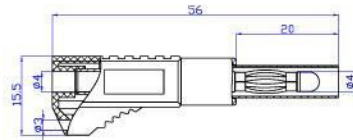


25.503. \*



**Material**

Insulator:PA  
Body:Brass  
Spring:Beryllium copper  
Surface:Nickel plated  
\*Solder connection

**Rated voltage/current**  
CATII 1000V/Max.32A

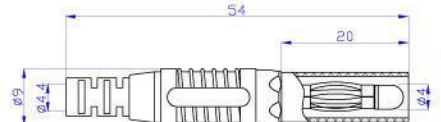


25.451. \*



**Material**

Insulator:PA  
Body:Brass  
Spring:Beryllium copper  
Surface:Nickel plated  
\*Press connection

**Rated voltage/current**  
30Vac-60Vdc/Max.32A

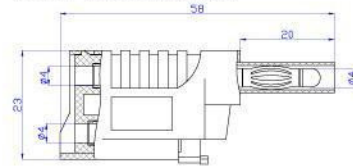



25.504. \*



**Material**

Insulator:PA  
Body:Brass  
Spring:Beryllium copper  
Surface:Nickel plated  
\*Solder connection

**Rated voltage/current**  
CATII 1000V/Max.32A




25.501. \*



**Material**

Insulator:PA  
Body:Brass  
Spring:Beryllium copper  
Surface:Nickel plated  
\*Solder connection

**Rated voltage/current**  
CATII 600V/Max.32A

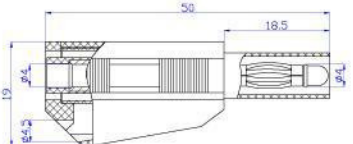

25.505. \*



**Material**

Insulator:PA  
Body:Brass  
Surface:Nickel plated  
\*Solder connection

**Rated voltage/current**  
CATII 600V/Max.19A

