


25.431.*



Material

Insulator:PA
Body:Brass
Surface:Nickel plated
*Solder connection

Rated voltage/current
30Vac-60Vdc/Max.24A




25.502.*



Material

Insulator:PA
Body:Brass
Spring:Beryllium copper
Surface:Nickel plated
*Solder connection

Rated voltage/current
CATII 1000V/Max.32A




25.450.*



Material

Insulator:PA
Body:Brass
Spring:Beryllium copper
Surface:Nickel plated
*Solder connection

Rated voltage/current
CATII 600V/Max.32A

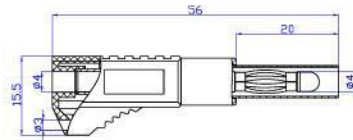


25.503.*



Material

Insulator:PA
Body:Brass
Spring:Beryllium copper
Surface:Nickel plated
*Solder connection

Rated voltage/current
CATII 1000V/Max.32A

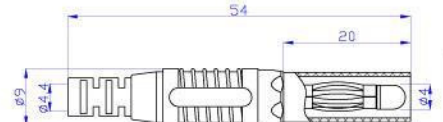


25.451.*



Material

Insulator:PA
Body:Brass
Spring:Beryllium copper
Surface:Nickel plated
*Press connection

Rated voltage/current
30Vac-60Vdc/Max.32A

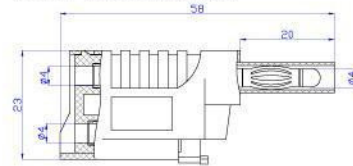


25.504.*



Material

Insulator:PA
Body:Brass
Spring:Beryllium copper
Surface:Nickel plated
*Solder connection

Rated voltage/current
CATII 1000V/Max.32A




25.501.*



Material

Insulator:PA
Body:Brass
Spring:Beryllium copper
Surface:Nickel plated
*Solder connection

Rated voltage/current
CATII 600V/Max.32A

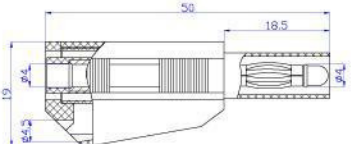

25.505.*



Material

Insulator:PA
Body:Brass
Surface:Nickel plated
*Solder connection

Rated voltage/current
CATII 600V/Max.19A

