


25.101. *




Material
 Insulator:PVC
 Body:Brass
 Surface:Gold plated
 *Solder connection
Rated voltage/current
 30Vac-60Vdc/Max.6A

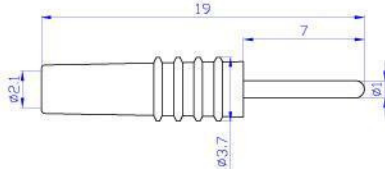

25.204. *




Material
 Insulator:PE
 Body:Brass
 Surface:Nickel plated
 *Solder connection
Rated voltage/current
 30Vac-60Vdc/Max.10A

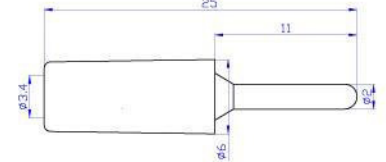

25.201. *




Material
 Insulator:PVC
 Body:Brass
 Spring:Beryllium copper
 Surface:Gold plated
 *Solder connection
Rated voltage/current
 30Vac-60Vdc/Max.10A

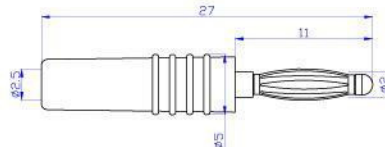

25.205. *




Material
 Insulator:PVC
 Body:Brass
 Spring:Beryllium copper
 Surface:Gold plated
 *Solder connection
Rated voltage/current
 30Vac-60Vdc/Max.10A

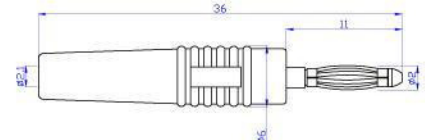

25.202. *




Material
 Insulator:PE
 Body:Brass
 Spring:Beryllium copper
 Surface:Gold plated
 *Solder connection
Rated voltage/current
 30Vac-60Vdc/Max.12A



25.206. *




Material
 Insulator:PE
 Body:Brass
 Spring:Beryllium copper
 Surface:Gold plated
 *Solder connection
Rated voltage/current
 30Vac-60Vdc/Max.10A

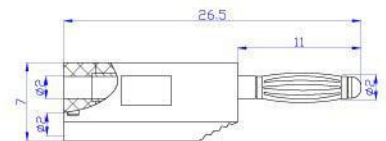

25.203. *



Material
 Insulator:PE
 Body:Brass
 Spring:Beryllium copper
 Surface:Gold plated
 *Solder connection
Rated voltage/current
 30Vac-60Vdc/Max.10A



25.207. *



Material
 Insulator:PE
 Body:Brass
 Spring:Beryllium copper
 Surface:Gold plated
 *Solder connection
Rated voltage/current
 30Vac-60Vdc/Max.10A

