


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 07/02/06'		


NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - OPERATING TEMPERATURE: 0°C~+85°C.
 - STORAGE TEMPERATURE: -20°C~+70°C.
- PRODUCT NUMBER CODE:
DS1002-01 - X X X X


- Clip plating
 - Tin 150u"
 - Tin 200u"
 - G/F
 - Gold 3u"
 - Gold 10u"
 - Gold 15u"
- Pin plating
 - Tin 150u"
 - Tin 200u"
 - G/F
 - Gold 3u"
 - Gold 10u"
 - Gold 15u"
- Mounting type
 - V: V/T TYPE
 - R: R/A TYPE
 - S: SMT TYPE
- No. of contacts
 - 1*1 - 1*64
 - 2*1 - 2*40

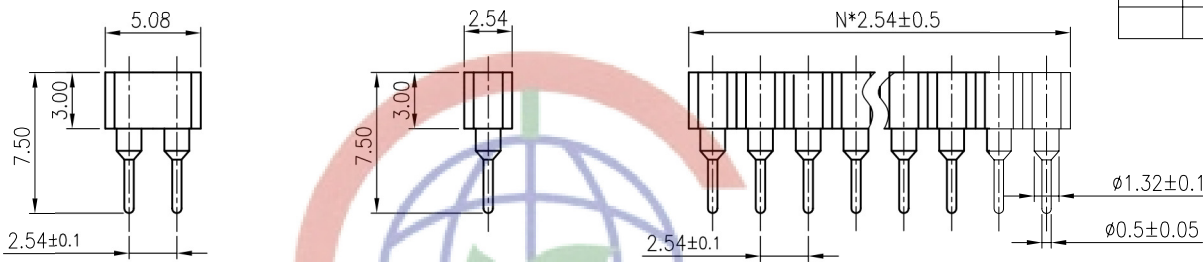

Dual rows
Single row
V/T TYPE

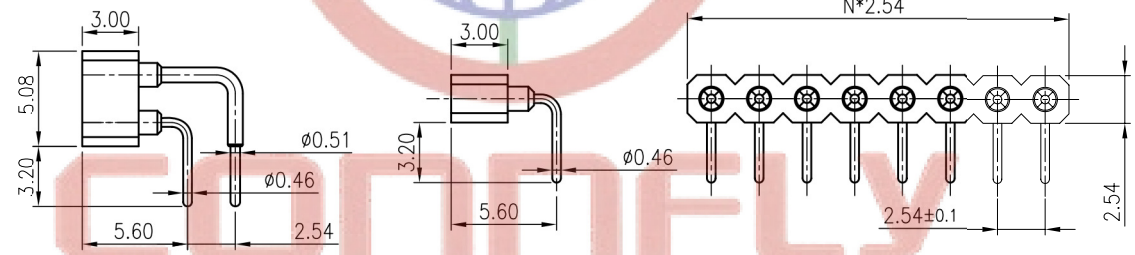

Dual rows
Single row
R/A TYPE

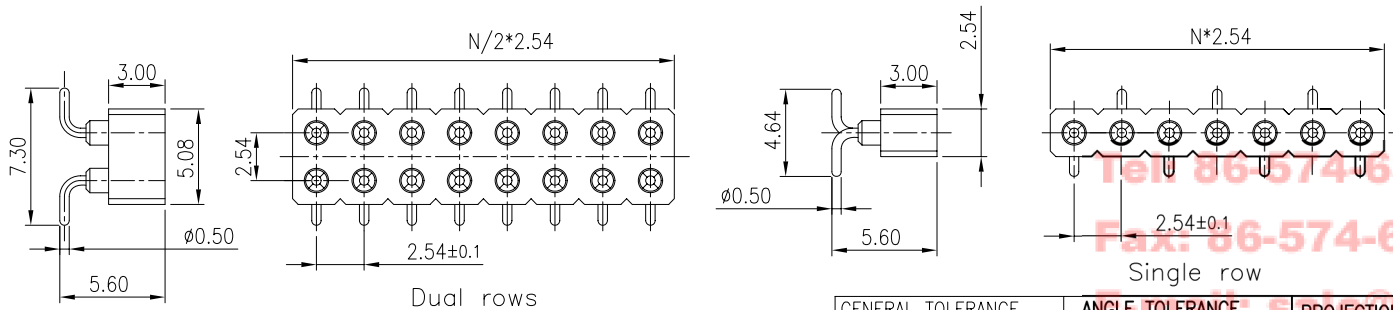

Dual rows
SMT TYPE

N: No. of contacts

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5'	UNITS	mm	IC SOCKET R/A & V/T & SMT PITCH 2.54mm	
.X	±0.38	.X	±3'	SHEET SIZE	A4	SERIES	DS1002-01 SERIES
.XX	±0.25	.XX	±2'	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
DRAWING TYPE	CUSTOMER	SCALE		SHEET		DRAWING NO.	
		1:1		10F1		C-DS1002-01-XXXX	