

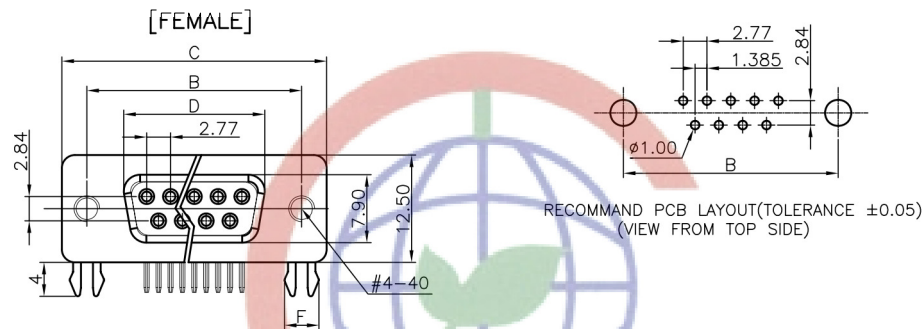

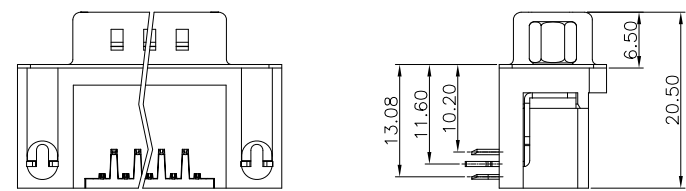

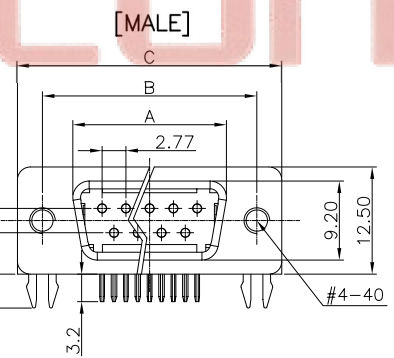


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 06/14/07'	~	



- NOTES: 备注
- PRODUCTS PERFORMANCE:
 - VOLTAGE RATING: 250V AC.
 - CONTACT CURRENT RATING: 1.5A MAX. PER PIN.
 - CONTACT RESISTANCE: 20mΩ MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ MIN.
 - OPERATING TEMPERATURE: -20°C~+70°C.
 - PRODUCT NUMBER CODE:

DS1037 -01- X X X X X X X X

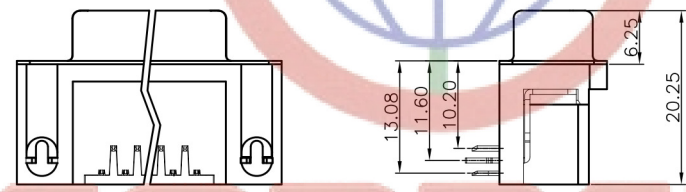

- SCREW DIM. E
 - 4: 4.80mm
 - 5: 5.80mm
- BOARD LOCK DIM. F
 - 4: 4.00mm
 - 7: 3.70mm
- CONTACT PLATING
 - T: SELECTIVE GOLD FLASH
 - Si: FULL GOLD FLASH
 - 6: FULL TIN
- COLOR OF HOUSING
 - K: BLACK
 - B: BLUE
- SCREW TYPE
 - A: WITH SCREW TYPE
 - B: WITH RIVET TYPE
 - C: WITH SCREW AND RIVET TYPE
 - D: RIVET TYPE WITH SCREW IN BULD PACKAGE
- SHELL PLATING
 - N: Nickel
 - T: Tin
- CONNECTOR TYPE
 - M: MALE
 - F: FEMALE
- No. OF CONTACT
 - 09: 9pos.
 - 15: 15pos.
 - 25: 25pos.
 - 37: 37pos.

Dimension

Position	A±0.2	B±0.2	C±0.2	D
9	17.90	24.99	30.80	16.33
15	26.50	33.32	39.14	24.66
25	40.00	47.04	53.04	38.38
37	56.50	63.50	69.32	54.84

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE
X. ±0.50	X. ±3°	UNITS mm	D-SUB RIGHT ANGLE(9.4mm) TYPE
.X ±0.30	.X ±2°	SHEET SIZE A4	SERIES DS1037-01 SERIES
.XX ±0.20	.XX ±1°	DRAWING TYPE ASSEMBLY	
SCALE 1:1	SHEET 1 OF 1		
DRAWING NO. C-DS1037-01-XXXXXX			

ADD: EAS...
Fax: 86-574-6351081
E-mail: sale@zhenqin.com.cn
http://www.connfly.com

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD

Tel: 86-574-635087
Fax: 86-574-6351081
E-mail: sale@zhenqin.com.cn
http://www.connfly.com