


4mm Test Lead


Test lead with the injected 4mm stackable nickel plated plug on both ends.

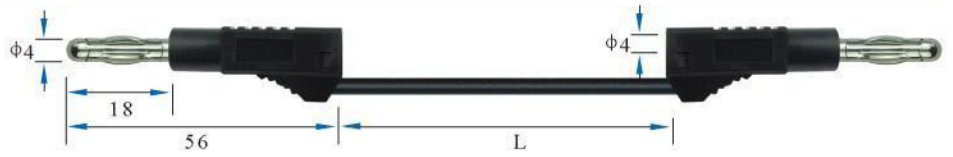

22.480. <input type="checkbox"/> *	Rated voltage/current: 30Vac-60Vdc/Max.15A	1.0mm ² JBF	025	050	100
22.490. <input type="checkbox"/> *	Rated voltage/current: 30Vac-60Vdc/Max.15A	2.5mm ² JBF	025	050	100
22.500. <input type="checkbox"/> *	Rated voltage/current: 30Vac-60Vdc/Max.32A	2.5mm ² SIL	025	050	100

4mm Test Lead


Test lead one end with the 4mm stackable nickel plated plug and the other end with 55mm length nickel plated crocodile clip.

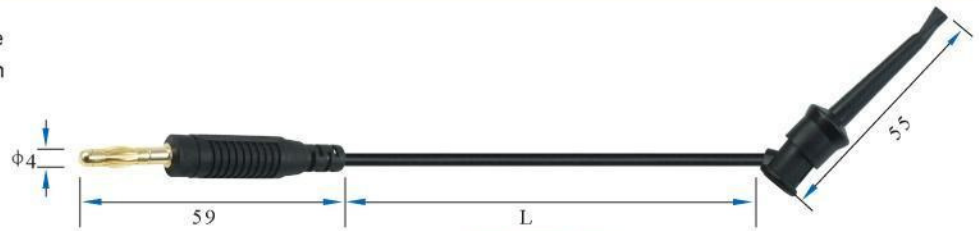

22.510. <input type="checkbox"/> *	Rated voltage/current: 30Vac-60Vdc/Max.15A	0.75mm ² PVC	025	050	100
22.520. <input type="checkbox"/> *	Rated voltage/current: 30Vac-60Vdc/Max.15A	0.75mm ² SIL	025	050	100

4mm Test Lead

Test lead one end with the 4mm stackable nickel plated plug and the other end with 55mm length nickel plated crocodile clip.

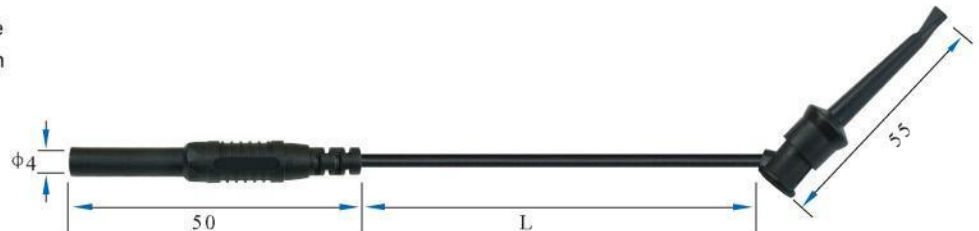

22.530. <input type="checkbox"/> *	Rated voltage/current: 30Vac-60Vdc/Max.15A	0.75mm ² PVC	025	050	100
22.540. <input type="checkbox"/> *	Rated voltage/current: 30Vac-60Vdc/Max.15A	0.75mm ² SIL	025	050	100

4mm Test Lead

Safety test lead one end with insulated 4mm straight plug and the other with the Nickel plated plugs with the protective cap.




22.550. <input type="checkbox"/> *	Rated voltage/current: CATIII 1000V/15A	0.75mm ² PVC	025	050	100	CE
22.560. <input type="checkbox"/> *	Rated voltage/current: CATIII 1000V/15A	0.75mm ² SIL	025	050	100	CE



4mm Test Lead

Test lead one end with the 4mm stackable nickel plated plug and the other end with 55mm length nickel plated crocodile clip.

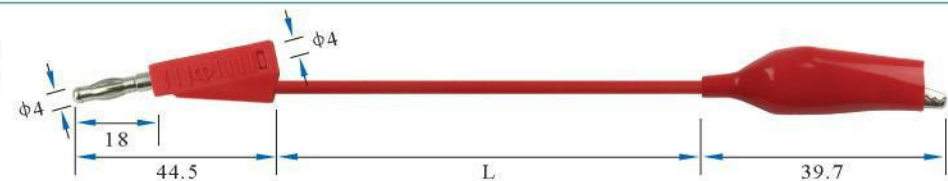

22.570. <input type="checkbox"/> *	Rated voltage/current: 30Vac-60Vdc/Max.15A	0.75mm ² PVC	025	050	100
22.580. <input type="checkbox"/> *	Rated voltage/current: 30Vac-60Vdc/Max.15A	0.75mm ² SIL	025	050	100