


4mm Test Lead


Test lead with the injected 4mm stackable nickel plated plug on both ends.

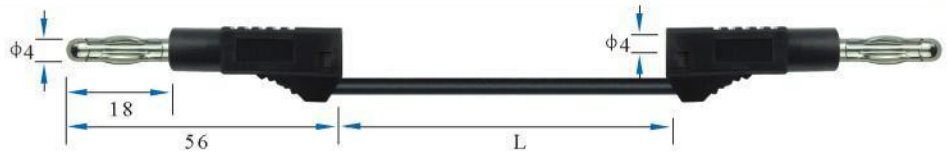

| | | | | | |
|------------------------------------|--|------------------------|-----|-----|-----|
| 22.480. <input type="checkbox"/> * | Rated voltage/current: 30Vac-60Vdc/Max.15A | 1.0mm ² JBF | 025 | 050 | 100 |
| 22.490. <input type="checkbox"/> * | Rated voltage/current: 30Vac-60Vdc/Max.15A | 2.5mm ² JBF | 025 | 050 | 100 |
| 22.500. <input type="checkbox"/> * | Rated voltage/current: 30Vac-60Vdc/Max.32A | 2.5mm ² SIL | 025 | 050 | 100 |

4mm Test Lead


Test lead one end with the 4mm stackable nickel plated plug and the other end with 55mm length nickel plated crocodile clip.

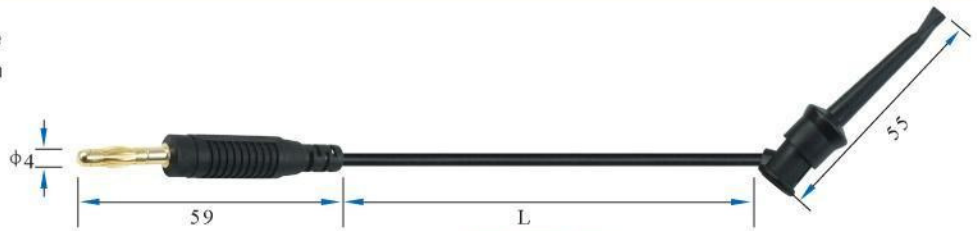

| | | | | | |
|------------------------------------|--|-------------------------|-----|-----|-----|
| 22.510. <input type="checkbox"/> * | Rated voltage/current: 30Vac-60Vdc/Max.15A | 0.75mm ² PVC | 025 | 050 | 100 |
| 22.520. <input type="checkbox"/> * | Rated voltage/current: 30Vac-60Vdc/Max.15A | 0.75mm ² SIL | 025 | 050 | 100 |

4mm Test Lead

Test lead one end with the 4mm stackable nickel plated plug and the other end with 55mm length nickel plated crocodile clip.

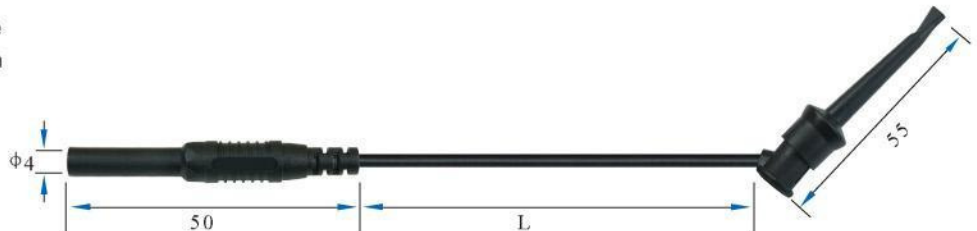

| | | | | | |
|------------------------------------|--|-------------------------|-----|-----|-----|
| 22.530. <input type="checkbox"/> * | Rated voltage/current: 30Vac-60Vdc/Max.15A | 0.75mm ² PVC | 025 | 050 | 100 |
| 22.540. <input type="checkbox"/> * | Rated voltage/current: 30Vac-60Vdc/Max.15A | 0.75mm ² SIL | 025 | 050 | 100 |

4mm Test Lead

Safety test lead one end with insulated 4mm straight plug and the other with the Nickel plated plugs with the protective cap.




| | | | | | | |
|------------------------------------|---|-------------------------|-----|-----|-----|----|
| 22.550. <input type="checkbox"/> * | Rated voltage/current: CATIII 1000V/15A | 0.75mm ² PVC | 025 | 050 | 100 | CE |
| 22.560. <input type="checkbox"/> * | Rated voltage/current: CATIII 1000V/15A | 0.75mm ² SIL | 025 | 050 | 100 | CE |



4mm Test Lead

Test lead one end with the 4mm stackable nickel plated plug and the other end with 55mm length nickel plated crocodile clip.

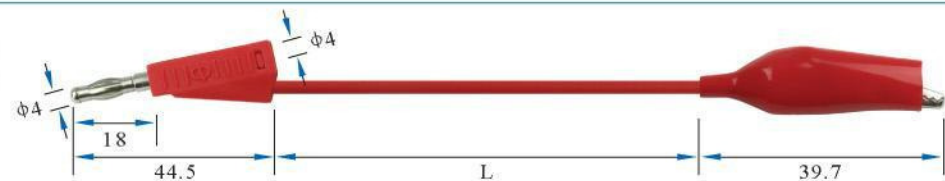

| | | | | | |
|------------------------------------|--|-------------------------|-----|-----|-----|
| 22.570. <input type="checkbox"/> * | Rated voltage/current: 30Vac-60Vdc/Max.15A | 0.75mm ² PVC | 025 | 050 | 100 |
| 22.580. <input type="checkbox"/> * | Rated voltage/current: 30Vac-60Vdc/Max.15A | 0.75mm ² SIL | 025 | 050 | 100 |