

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 10/22/09'	~	


NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- MECHANICAL CHARACTERISTICS:
 - CONTACT RETENTION FORCE: 500gf Min.
- ENVIRONMENT CHARACTERISTICS:
 - OPERATING TEMPERATURE: 0°C~+85°C.
 - STORAGE TEMPERATURE: -20°C~+70°C.

4. PRODUCT NUMBER CODE:

DS1023- X X X X

- X: PROFILE HEIGHT(DIM A)
1: 8.5mm
- X: CONTACT PLATING
0: SELETIVE GOLD FLASH
F1: FULL GOLD FLASH
- X: MOUNTIING TYPE
S: Straight TYPE
- X: No.OF CONTACTS
1*1-1*40
2*2-2*40

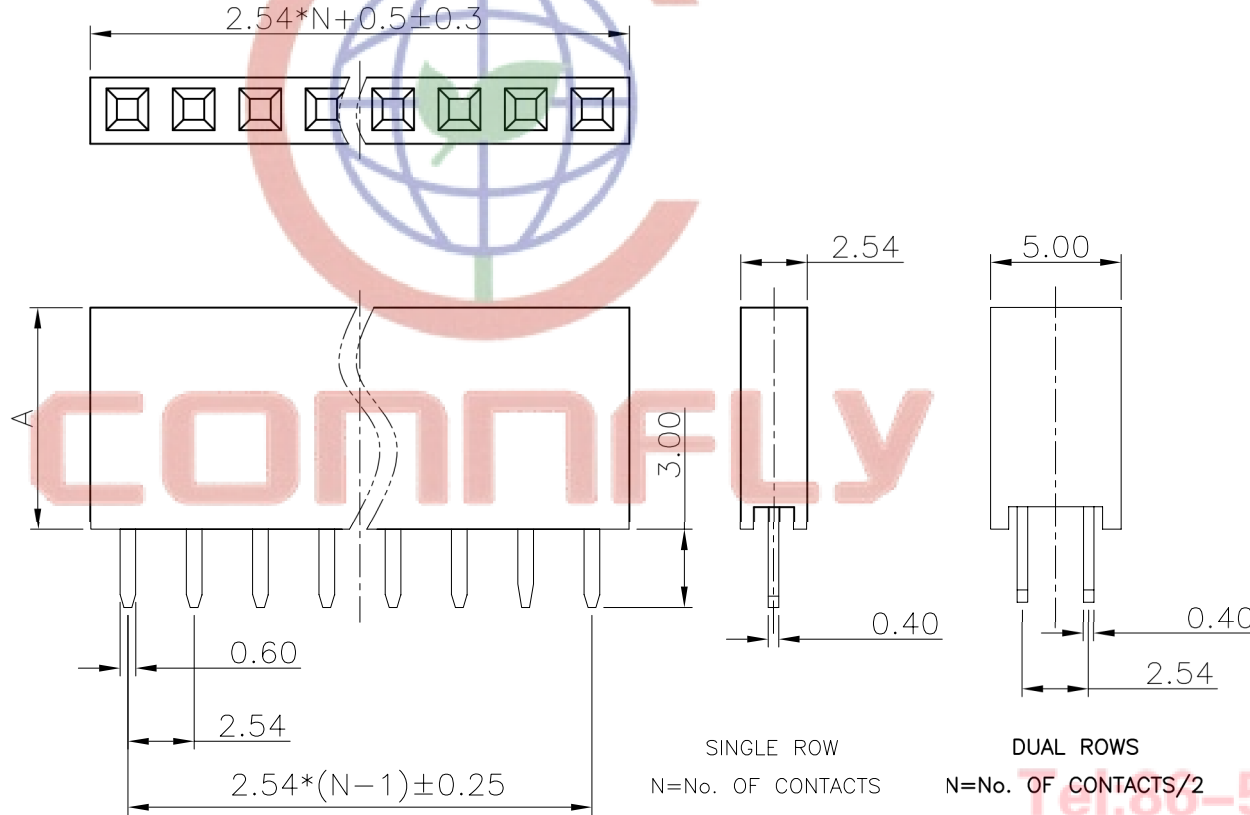

Tel:86-574-63508787

Fax:86-574-63510817

E-mail:sale@zhenqin.com.cn

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION		TITLE	FEMALT HEADER PITCH
X. ±0.60	X. ±5°	UNITS	mm	2.54mm	V/T SINGLE/DUAL ROWS TYPE
.X ±0.38	.X ±3°	SHEET SIZE	A4	SERIES	DS1023 SERIES
.XX ±0.25	.XX ±2°				
DRAWING TYPE	CUSTOMER				
SCALE	1:1	SHEET	1 OF 1		
DRAWING NO.	C-DS1023-XXX1-A				
		CONNFLY CONNFLY ELECTRONIC CO. LTD			

晨翔电子有限公司

