


20.157.*

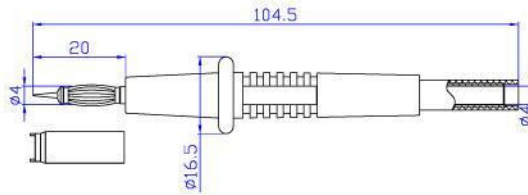

Material

Insulator:PA
Body:Brass
Spring:Beryllium copper
Surface:Nickel plated

Rated voltage/current:


CATII 1000V/Max.32A

Feature

Safety test probe with 4mm socket connection. Spring-loaded tip with the protective cap.



20.161.*

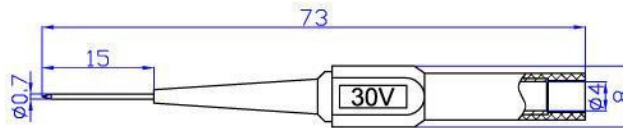

Material

Insulator:PA
Body:Stainless steel & Brass

Rated voltage/current:


30Vac-60Vdc/Max.1A

Feature

Safety test probe with 4mm socket connection. Sharp stainless steel needle.



20.162.*

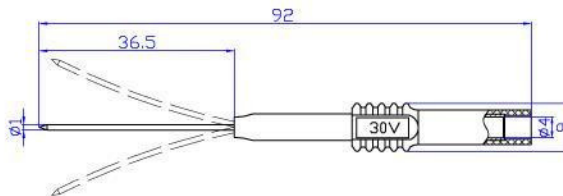

Material

Insulator:PA
Body:Stainless steel & Brass

Rated voltage/current:


30Vac-60Vdc/Max.10A

Feature

Safety test clip with 4mm socket connection. Long sharp stainless steel tip and flexible spring with the silicone tube can meet kinds of your request.



20.163.*

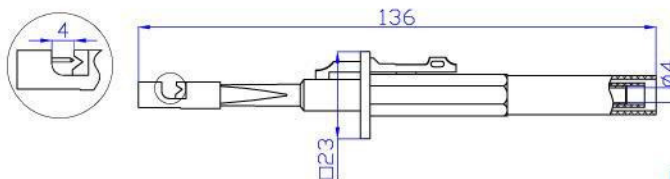

Material

Insulator:PA
Body:Stainless steel & Brass

Rated voltage/current:

CATIII 1000V/Max.10A

Feature

Safety test probe with 4mm socket connection. Stainless steel tip can connect with the wire without cutting it.

