


20.212.*

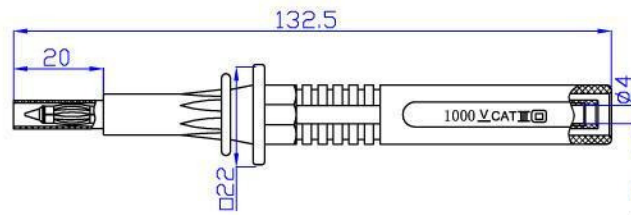

CE

Material

Insulator:PA

Body:Brass

Rated voltage/current:


CATIII 1000V/Max.20A

Feature

Safety test probe with 4mm socket connection. Spring loaded side with the shrinkable tube.Fuse inside.



20.170.*

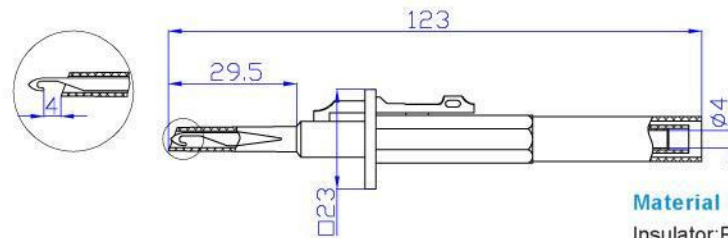

CE

Material

Insulator:PA

Body:Brass & Stainless steel

Rated voltage/current:


CATIII 1000V/Max.10A

Feature

Safety test clip with 4mm socket connection. The clip can connect the terminals easily.



20.601.*

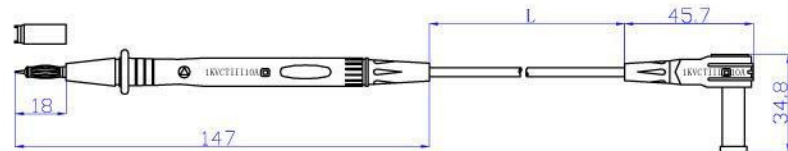

CE


Feature

Safety test lead one end with the insulated 4mm spring loaded test probe and the other end with the insulated 4mm angled plug.Nickel plated plugs with the protective cap. Red+Black as a set.



Rated voltage/current: CATIII 1000V/10A 0.75mm² PVC 100

20.602.*

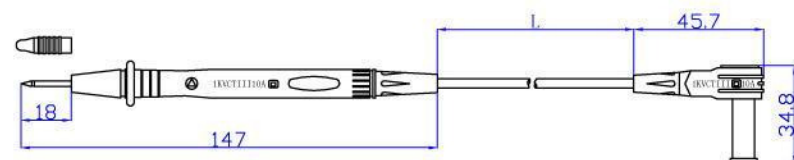

CE

Feature

Safety test lead one end with the insulated test probe and the other end with the insulated 4mm angled plug.Nickel plated plugs with the protective cap.



Rated voltage/current: CATIII 1000V/10A 0.75mm² PVC 100