


| REV. | DESCRIPTION | DRAWN | CHECKED | APPROVED |
|------|-------------|---------------|---------|----------|
| A | NEW RELEASE | YCH 10/22/09' | ~ | |
| | | | | |
| | | | | |

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- MECHANICAL CHARACTERISTICS:
 - CONTACT RETENTION FORCE: 500gf Min.
- ENVIRONMENT CHARACTERISTICS:
 - OPERATING TEMPERATURE: 0°C~+85°C.
 - STORAGE TEMPERATURE: -20°C~+70°C.
- PRODUCT NUMBER CODE:

DS1023- X X X X

- PROFILE HEIGHT(DIM A)
1: 8.5mm
- CONTACT PLATING
0: SELECTIVE GOLD FLASH
F1: FULL GOLD FLASH
- MOUNTING TYPE
S: Straight TYPE
- No.OF CONTACTS
1*1-1*40
2*2-2*40

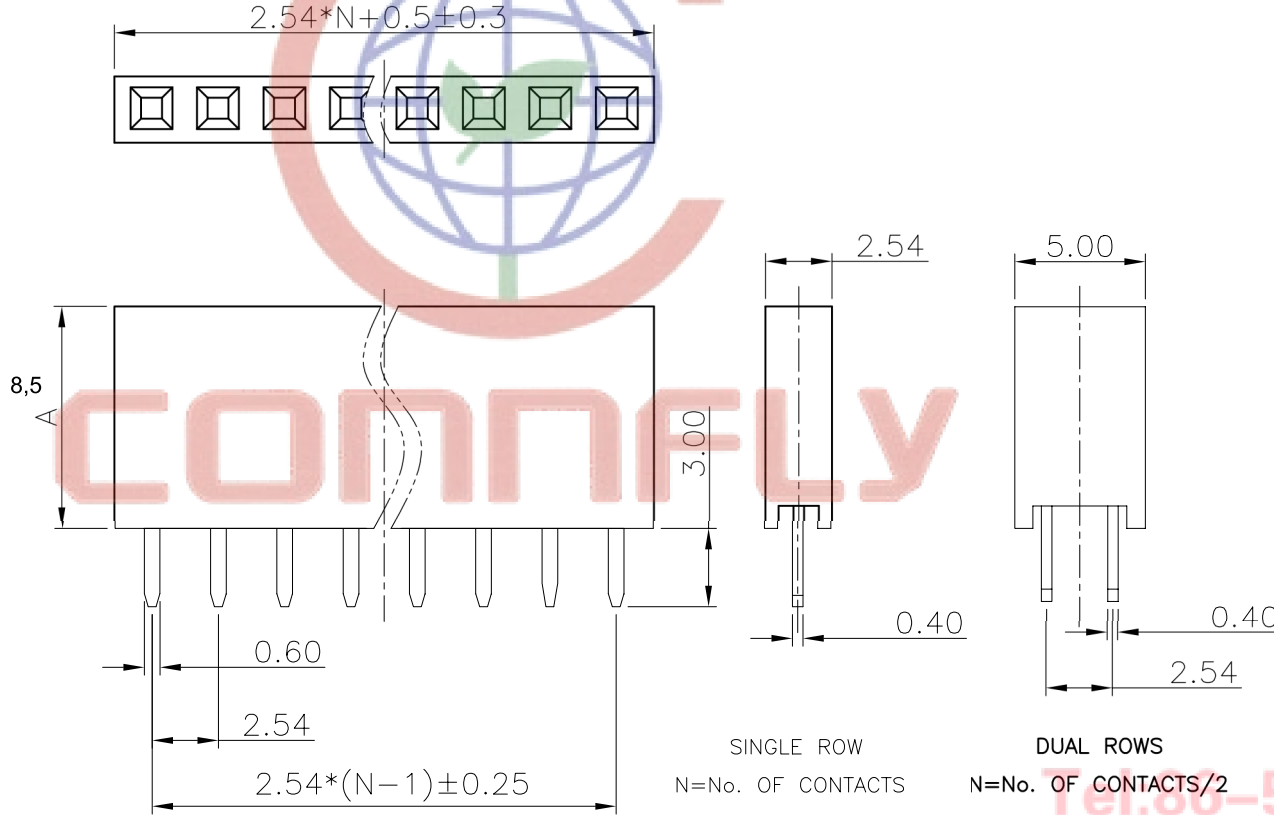

Tel:86-574-63508787

Fax:86-574-63510817

E-mail:sale@zhenqin.com.cn

| GENERAL TOLERANCE | | ANGLE TOLERANCE | | PROJECTION | TITLE | FEMALT HEADER PITCH | |
|-------------------|-------|-----------------|-------|------------|--------|---------------------------|---------------|
| X. | ±0.60 | X. | ±5° | mm | 2.54mm | V/T SINGLE/DUAL ROWS TYPE | |
| .X | ±0.38 | .X | ±3° | | | | |
| .XX | ±0.25 | .XX | ±2° | | | | |
| DRAWING TYPE | | CUSTOMER | | SHEET SIZE | A4 | SERIES | DS1023 SERIES |
| SCALE | | 1:1 | SHEET | 1 OF 1 | | | |
| DRAWING NO. | | C-DS1023-XXX1-A | | | | | |



晨翔电子有限公司

CONNFLY CONNFLY ELECTRONIC CO. LTD