


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 07/02/06'		


NOTES:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 20mΩ Max.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
  - OPERATING TEMPERATURE: 0°C~+85°C.
  - STORAGE TEMPERATURE: -20°C~+70°C.
- PRODUCT NUMBER CODE:  
DS1002-01 - X X X X


- Clip plating
  - Tin 150u"
  - Tin 200u"
  - G/F
  - Gold 3u"
  - Gold 10u"
  - Gold 15u"
- Pin plating
  - Tin 150u"
  - Tin 200u"
  - G/F
  - Gold 3u"
  - Gold 10u"
  - Gold 15u"
- Mounting type
  - V: V/T TYPE
  - R: R/A TYPE
  - S: SMT TYPE
- No. of contacts
  - 1\*1 - 1\*64
  - 2\*1 - 2\*40

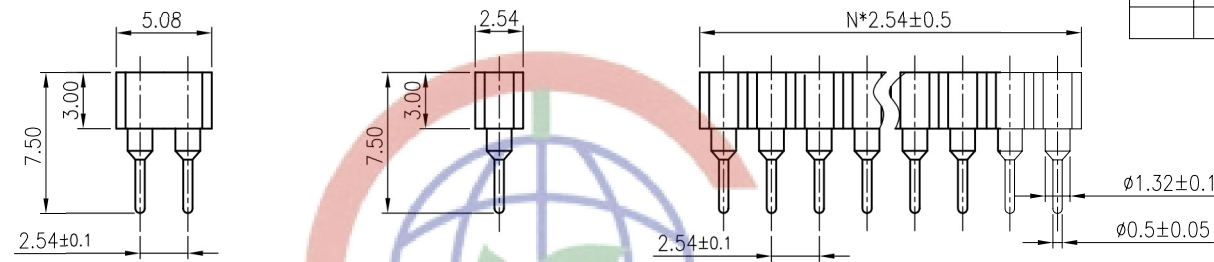

Dual rows  
Single row  
V/T TYPE

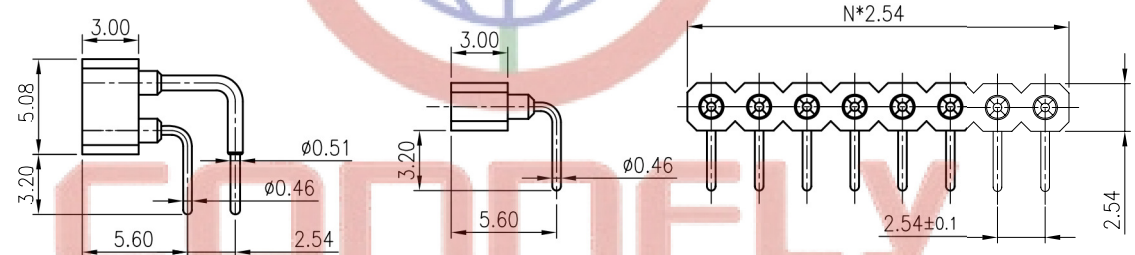

Dual rows  
Single row  
R/A TYPE

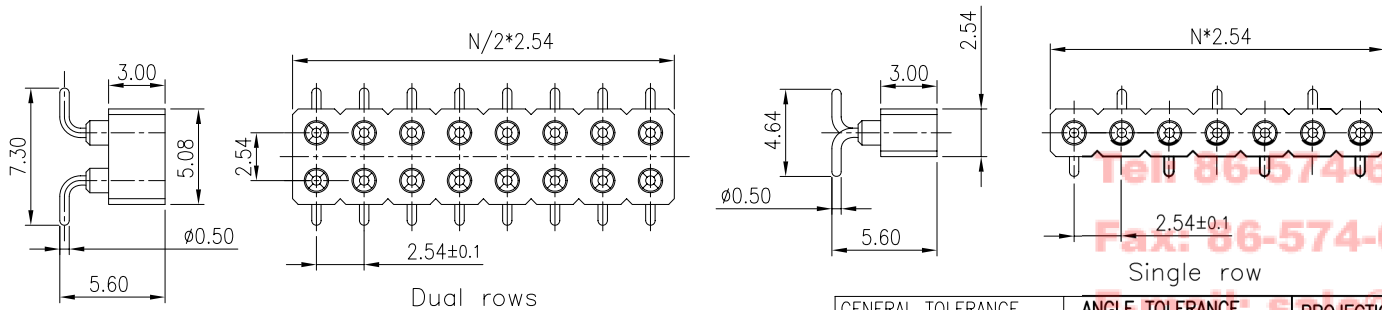

Dual rows  
Single row  
SMT TYPE

N: No. of contacts

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	IC SOCKET R/A & V/T & SMT PITCH 2.54mm	
X.	±0.60	X.	±5'	UNITS	mm		
.X	±0.38	.X	±3'	SHEET SIZE	A4	SERIES	DS1002-01 SERIES
.XX	±0.25	.XX	±2'				
DRAWING TYPE	CUSTOMER	Add.: West China					
SCALE	1:1	SHEET	10F1	晨翔电子有限公司			
DRAWING NO.	C-DS1002-01-XXXX	CONNFLY CONNFLY ELECTRONIC CO. LTD					