


IEC cord connector C13, rewirable, straight



4782



### Description

- Rewireable plug:  
Screw-on
- Outlet, Pin temperature 70 °C, Protection class I
- Cable
- Substitute for type [P587](#)

### Approvals

- VDE License Number: 40010732
- UL License Number: E96454
- CSA License Number: 56242


### Technical Data

|                           |   |                         |  |
|---------------------------|---|-------------------------|--|
| Ratings IEC               | 10 A / 250 VAC; 50 Hz   | Appliance-Inlet/-Outlet | C13 acc. to IEC/EN 60320-1, UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10 A, Protection class I |
| Ratings UL/CSA            | 15 A / 250 VAC; 60 Hz   |                         |  |
| Dielectric Strength       | > 2 kVAC between L-N<br>> 2 kVAC between L/N-PE<br>(1 min/50 Hz)  |                         |  |
| Allowable Operation Temp. | -25 °C to 70 °C   |                         |  |
| Protection Class          | Suitable for appliances with protection class I acc. to IEC 61140 |                         |  |
| Terminal                  | Cable   |                         |  |
| Material: Housing         | Thermoplastic, black, UL 94V-0                                    |                         |  |

### Dimensions

4782

Length |-----| 28.7 mm

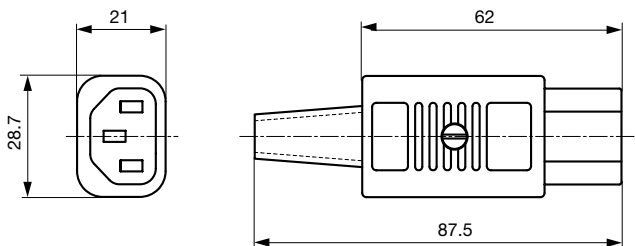

### Variants

| Color | Max. cable diameter | Max. wire size                       | Order Number |
|-------|---------------------|--------------------------------------|--------------|
| black | 8.5 mm              | 3 x 1 mm <sup>2</sup> / 3 x 18 AWG   | 4782.0000    |
| black | 10.0 mm             | 3 x 2.1 mm <sup>2</sup> / 3 x 14 AWG | 4782.0100    |

Max. torque for screws: Terminal: 0.5 Nm, Cable clamp: 0.3 Nm, Cover: 0.3 Nm

Cord retaining clamp see accessories

**Packaging unit** 100 Pcs

## Accessory

## Description

[Cord retaining kits](#)

## Cord retaining strain relieve



|                |           |
|----------------|-----------|
| Flat head, A   | 4700.0001 |
| Countersunk, B | 4700.0002 |
| Countersunk, C | 4700.0003 |
| Flat head, E   | 4700.0005 |
|                | ...       |