


# Gniazdo IBM do obudowy AS-302-1 10A/250VAC konektor 4,7x0,8mm nr kat. 21603

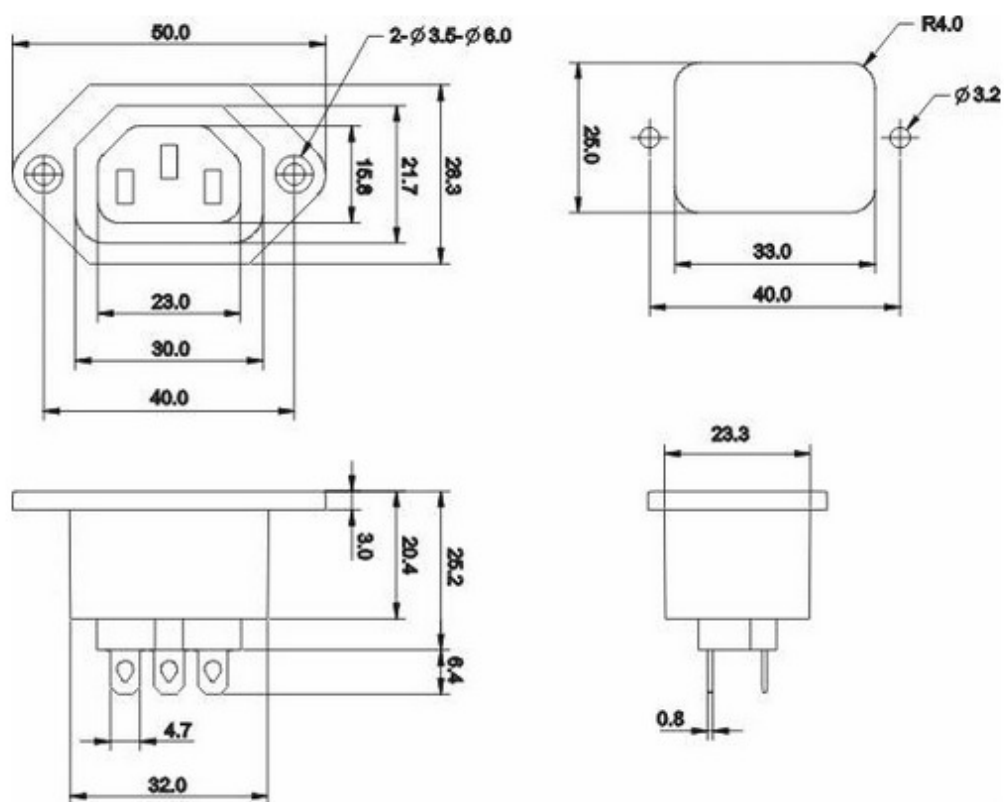

Standard:	IEC 60320 F
Housing Material:	PBT or Nylon 66 UL94V-O ,V-2
Pin Material:	Brass
Voltage rating:	250V AC
Rating:	15A 250VAC(CSA, UL) 10A 250VAC( VDE, 3C)
InsulationResistance:	100M $\Omega$ 500V DC/1 minute
Dielectric Strength:	2000V AC/1 minute
Temperature range	-45°C ~ +105°C