


25.101. \*




**Material**  
 Insulator:PVC  
 Body:Brass  
 Surface:Gold plated  
 \*Solder connection  
**Rated voltage/current**  
 30Vac-60Vdc/Max.6A

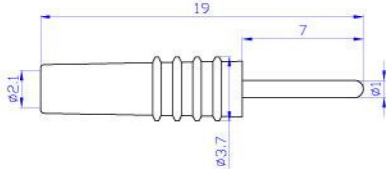

25.204. \*




**Material**  
 Insulator:PE  
 Body:Brass  
 Surface:Nickel plated  
 \*Solder connection  
**Rated voltage/current**  
 30Vac-60Vdc/Max.10A

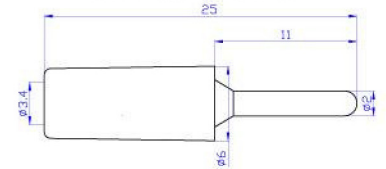

25.201. \*




**Material**  
 Insulator:PVC  
 Body:Brass  
 Spring:Beryllium copper  
 Surface:Gold plated  
 \*Solder connection  
**Rated voltage/current**  
 30Vac-60Vdc/Max.10A

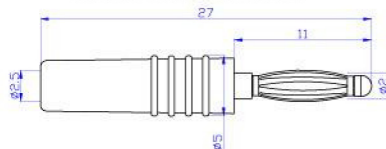

25.205. \*




**Material**  
 Insulator:PVC  
 Body:Brass  
 Spring:Beryllium copper  
 Surface:Gold plated  
 \*Solder connection  
**Rated voltage/current**  
 30Vac-60Vdc/Max.10A

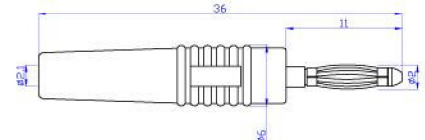

25.202. \*




**Material**  
 Insulator:PE  
 Body:Brass  
 Spring:Beryllium copper  
 Surface:Gold plated  
 \*Solder connection  
**Rated voltage/current**  
 30Vac-60Vdc/Max.12A



25.206. \*




**Material**  
 Insulator:PE  
 Body:Brass  
 Spring:Beryllium copper  
 Surface:Gold plated  
 \*Solder connection  
**Rated voltage/current**  
 30Vac-60Vdc/Max.10A

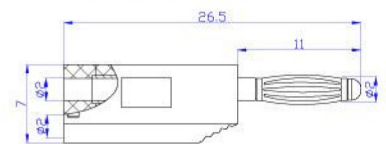

25.203. \*



**Material**  
 Insulator:PE  
 Body:Brass  
 Spring:Beryllium copper  
 Surface:Gold plated  
 \*Solder connection  
**Rated voltage/current**  
 30Vac-60Vdc/Max.10A



25.207. \*



**Material**  
 Insulator:PE  
 Body:Brass  
 Spring:Beryllium copper  
 Surface:Gold plated  
 \*Solder connection  
**Rated voltage/current**  
 30Vac-60Vdc/Max.10A

