




DK..N Series


- Compact and miniature design saves wiring space
- Accessories including marking labels, bridges, and partition plates, that can meet various requirements
- High reliability and robust design adapts vibration and harsh thermal variation to prevent terminal connection fault
- IEC60947-7-1 & UL1059 compliance



DK2.5N

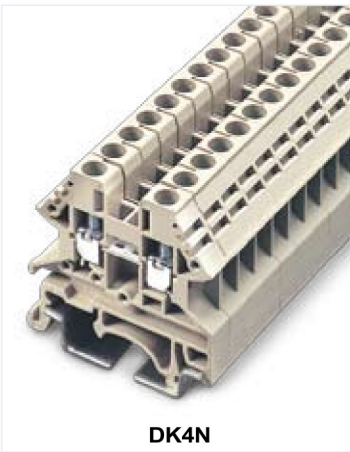

DK4N

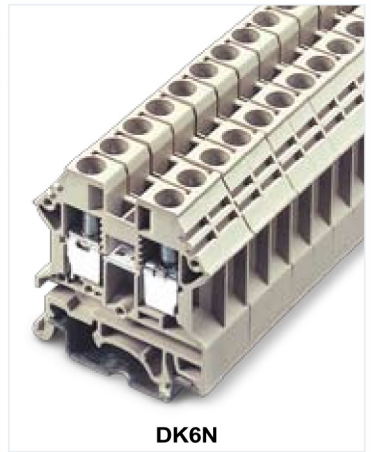


DK6N

Approval		
Technical Data	UL	IEC
Rated voltage	600V	1000V
Rated current	20A	24A
Conductor cross-section, solid (AWG/mm ²)	22~12 / 0.34~2.5	
Conductor cross-section, flexible (AWG/mm ²)	22~12 / 0.34~2.5	
Rated impulse withstand voltage	6KV	
Torque(N-m)	0.4	0.4
Screw	M2.5	
Wire strip length	9~11mm	
Insulating material	PA	
TxHxW(mm)	5.1 x 39.6 x 40.5	
Optional color	Cat. No.	
	DK2.5N-RD	
	DK2.5N-BL	
	DK2.5N-BK	
	DK2.5N-OR	
Accessories	Cat. No.	
	DK4NC	
	DKNSPS-001	
2 way	DSS2.5N-02P	
⋮	⋮	
⋮	⋮	
10way	DSS2.5N-10P	
2 way	CSC-2.502PN	
⋮	⋮	
⋮	⋮	
10way	CSC-2.510PN	
	TM26	
	TS-35 / TS-32	

Approval		
Technical Data	UL	IEC
Rated voltage	600V	1000V
Rated current	30A	32A
Conductor cross-section, solid (AWG/mm ²)	22~10 / 0.34~4	
Conductor cross-section, flexible (AWG/mm ²)	22~10 / 0.34~4	
Rated impulse withstand voltage	6KV	
Torque(N-m)	0.6	0.5
Screw	M3	
Wire strip length	9~11mm	
Insulating material	PA	
TxHxW(mm)	6.1 x 39.6 x 40.35	
Optional color	Cat. No.	
	DK4N-RD	
	DK4N-BL	
	DK4N-BK	
	DK4N-OR	
Accessories	Cat. No.	
	DK4NC	
	DKNSPS-001	
2 way	DSS4N-02P	
⋮	⋮	
⋮	⋮	
10way	DSS4N-10P	
2 way	CSC-402PN	
⋮	⋮	
⋮	⋮	
10way	CSC-410PN	
	TM27	
	TS-35 / TS-32	

Approval		
Technical Data	UL	IEC
Rated voltage	600V	1000V
Rated current	50A	41A
Conductor cross-section, solid (AWG/mm ²)	20~8 / 0.5~6	
Conductor cross-section, flexible (AWG/mm ²)	20~8 / 0.5~6	
Rated impulse withstand voltage	8KV	
Torque(N-m)	1.2	1.2
Screw	M4	
Wire strip length	12~14mm	
Insulating material	PA	
TxHxW(mm)	8 x 45 x 41.75	
Optional color	Cat. No.	
	DK6N-RD	
	DK6N-BL	
	DK6N-BK	
	DK6N-OR	
Accessories	Cat. No.	
	DK6NC	
	DKNSPS-002	
2 way	DSS6N-02P	
⋮	⋮	
⋮	⋮	
10way	DSS6N-10P	
2 way	CSC-602P	
⋮	⋮	
⋮	⋮	
10way	CSC-610P	
	TM28	
	TS-35 / TS-32	


- End cover
- Partition
- Small partition
- Insertion bridge
- Insertion bridge
- Screw-on bridge
- Marking label
- Mounting Rail
- Tool

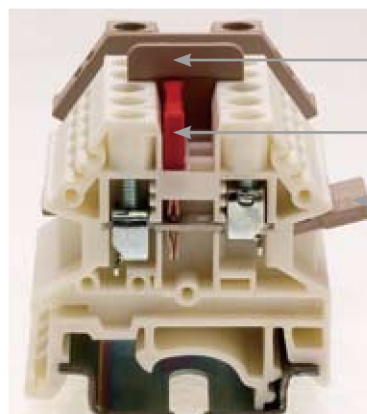


- Small partition
- Insertion bridge
- Insertion bridge





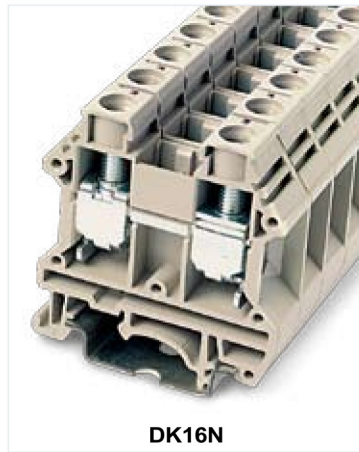

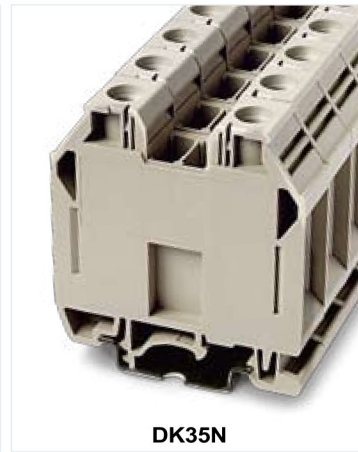

DK10N















DK16N



DK35N

Approval  		
Technical Data	UL	IEC
Rated voltage	600V	1000V
Rated current	60A	57A
Conductor cross-section, solid (AWG/mm ²)	20~6 / 0.5~10	
Conductor cross-section, flexible (AWG/mm ²)	20~6 / 0.5~10	
Rated impulse withstand voltage	8KV	
Torque(N-m)	1.3	1.2
Screw	M4	
Wire strip length	12~14mm	
Insulating material	PA	
TxHxW(mm)	10 x 49.3 x 42.9	
Optional color	Cat. No.	
	DK10N-RD	
	DK10N-BL	
	DK10N-BK	
	DK10N-OR	
Accessories	Cat. No.	
	DK10NC	
	DKNSPS-002	
	DSS10N-02P	
	⋮	
	DSS10N-10P	
	CSC-1002PN	
	⋮	
	CSC-1010PN	
	TM28	
	TS-35 / TS-32	

Approval  		
Technical Data	UL	IEC
Rated voltage	600V	1000V
Rated current	100A	76A
Conductor cross-section, solid (AWG/mm ²)	14~3 / 1.5~16	
Conductor cross-section, flexible (AWG/mm ²)	14~3 / 1.5~16	
Rated impulse withstand voltage	8KV	
Torque(N-m)	3.4	2
Screw	M5	
Wire strip length	14~16mm	
Insulating material	PA	
TxHxW(mm)	12 x 51.3 x 48.3	
Optional color	Cat. No.	
	DK16N-RD	
	DK16N-BL	
	DK16N-BK	
	DK16N-OR	
Accessories	Cat. No.	
	DK16NC	
	DKNSPS-003	
	DSS16N-02P	
	⋮	
	CSC-1602P	
	⋮	
	CSC-1610P	
	TM28	
	TS-35 / TS-32	

Approval  		
Technical Data	UL	IEC
Rated voltage	600V	1000V
Rated current	150A	125A
Conductor cross-section, solid (AWG/mm ²)	12~1/0 / 1.5~35	
Conductor cross-section, flexible (AWG/mm ²)	12~1/0 / 1.5~35	
Rated impulse withstand voltage	8KV	
Torque(N-m)	6.9	
Screw	M6	
Wire strip length	14~16mm	
Insulating material	PA	
TxHxW(mm)	16 x 60.3 x 55.4	
Optional color	Cat. No.	
	DK35N-RD	
	DK35N-BL	
	DK35N-BK	
	DK35N-OR	
Accessories	Cat. No.	
	DK35NC	
	DKNSPS-004	
	DSS35N-02P	
	⋮	
	CSC-3502P	
	⋮	
	CSC-3510P	
	TM28	
	TS-35 / TS-32	

Marking label

End cover

Insertion bridge

Insertion bridge

