





**DIN Rail terminal blocks / DK series**

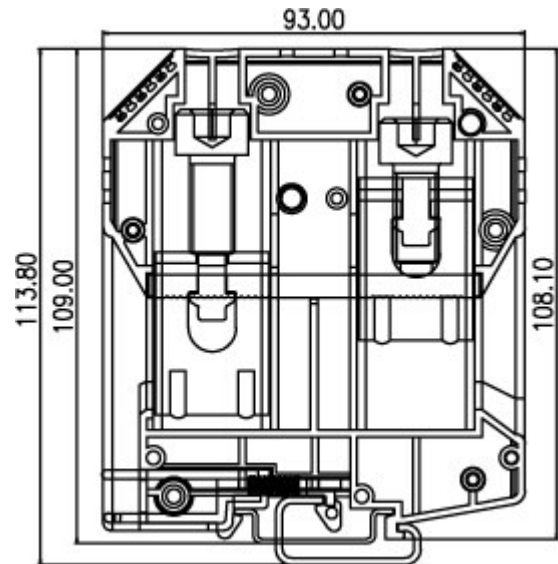

**DK150**

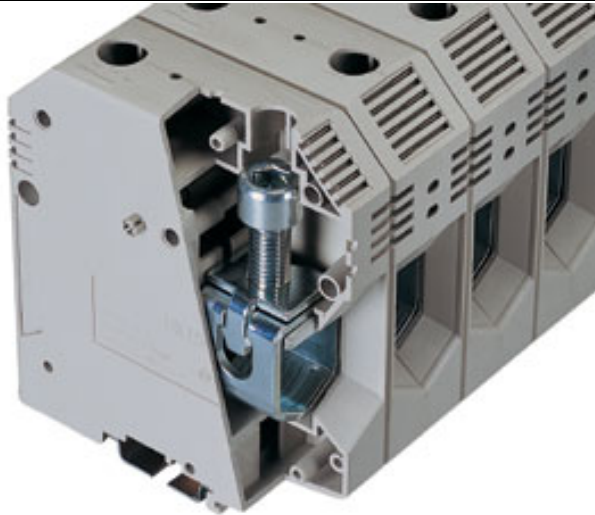

Approval	 	
Technical Data	UL	IEC
Rated voltage	600V	1000V
Rated current	275A	309A
Conductor cross-section, solid (AWG / mm <sup>2</sup> )	2(125A) / 35~150	
Conductor cross-section, flexible (AWG / mm <sup>2</sup> )	2~300/ 35~150 Kcmil	
Rated impulse withstand voltage	8KV	
Torque (N-m)	19	
Screw	M10	
Wire strip length	30~40mm	
Insulating material	PA	
TxHxW (mm)	38 x 108.1 x 93	
Optional color	Cat. No.	
<span style="color: red;">●</span>	DK150-RD	
<span style="color: blue;">●</span>	DK150-BL	
<span style="color: black;">●</span>	DK150-BK	
<span style="color: orange;">●</span>	DK150-OR	



	Accessories	Cat. No.
End cover		
Partition		
Small partition		
Insertion bridge		
Insertion bridge	2 way	CSC-15002P
	3 way	CSC-15003P
Screw-on bridge		
Marking label		TM28
Mounting Rail		TS-35 / TS-32
Tool		