





DIN Rail terminal blocks / DK series

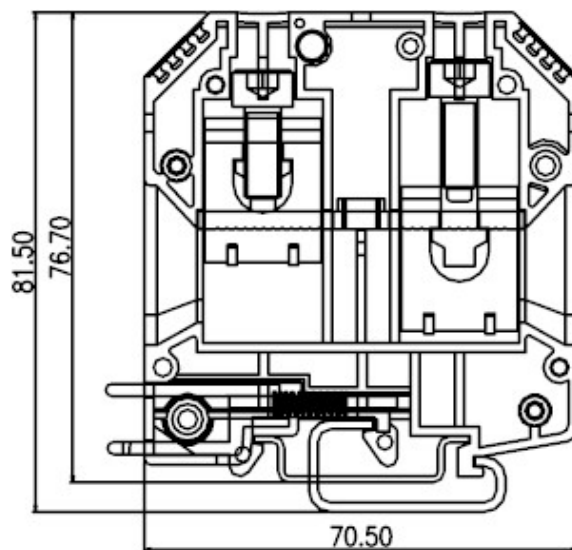

DK50

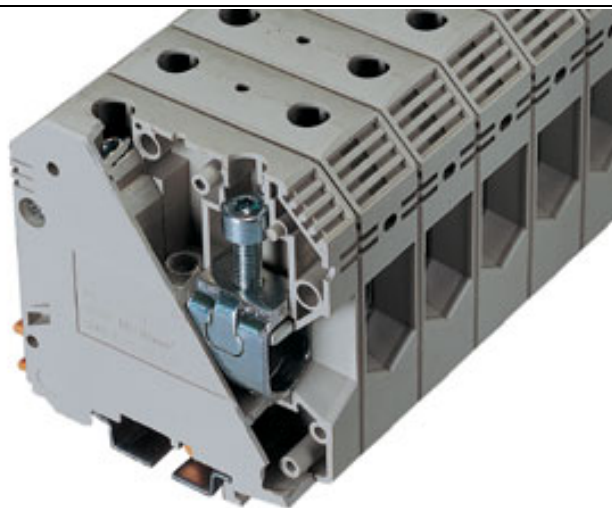

Approval	 	
Technical Data	UL	IEC
Rated voltage	600V	1000V
Rated current	150A	150A
Conductor cross-section, solid (AWG / mm ²)	6~2(105A) / 16~50	
Conductor cross-section, flexible (AWG / mm ²)	6~1/0 / 16~50	
Rated impulse withstand voltage	8KV	
Torque (N-m)	5.6	
Screw	M6	
Wire strip length	25~30mm	
Insulating material	PA	
TxHxW (mm)	20 x 75.8 x 70.5	
Optional color	Cat. No.	
●	DK50-RD	
●	DK50-BL	
●	DK50-BK	
●	DK50-OR	



	Accessories	Cat. No.
End cover		
Partition		
Small partition		
Insertion bridge		
Insertion bridge	2 way	CSC-5002P
	:	:
	:	:
	5 way	CSC-5005P
Screw-on bridge		
Marking label		TM28
Mounting Rail		TS-35 / TS-32
Tool		