



**DIN Rail terminal blocks / DKES series**

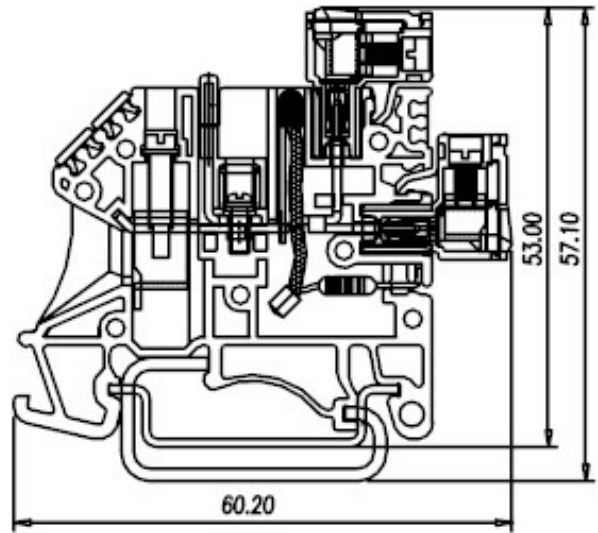


**DKES1.5**

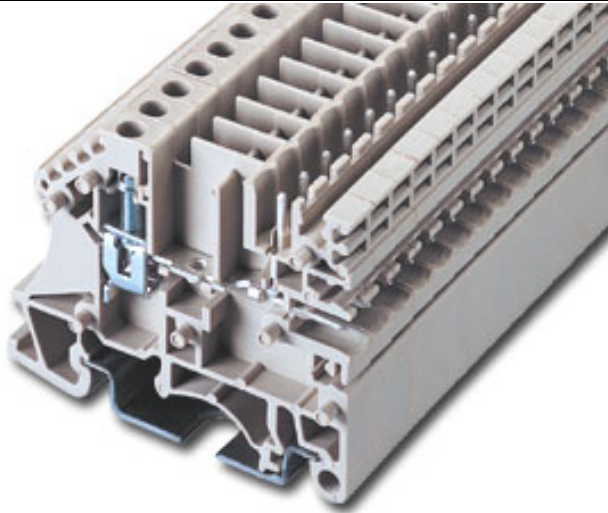

Approval		
Technical Data	UL	IEC
Rated voltage	300V	300V
Rated current	20A	24A
Conductor cross-section, solid (AWG / mm <sup>2</sup> )	22~12 / 0.5~2.5	
Conductor cross-section, flexible (AWG / mm <sup>2</sup> )	22~12 / 0.5~2.5	
Rated impulse withstand voltage	5KV	
Torque (N-m)	7.8	
Screw	M3	
Wire strip length	9~10mm	
Insulating material	PA	
TxHxW (mm)	5.08 x 42.4 x 50.6	
Optional color	Cat. No.	

	Accessories	Cat. No.
End cover	Left	DKES1.5CA / DKES1.5MCA
	Right	DKES1.5CB / DKES1.5MCB
Partition		DKESP1.5
Small partition	2 way	
	3 way	
	4 way	
	10 way	
Insertion bridge	2 way	CSC-2.502
	3 way	CSC-2.503
	4 way	CSC-2.504
	10 way	CSC-2.510
Insertion bridge	2 way	DS2.5-02P
	3 way	DS2.5-03P
	4 way	DS2.5-04P
	10 way	DS2.5-10P
Screw-on bridge		TM20 / TM26
Marking label		TS-35 / TS-32
Mounting Rail		0.5 x 3mm
Pole		Suitable plugs
02~25		2ESDV-XXP
02~24		2ESDP-XXP
02~24		2ESDF-XXP

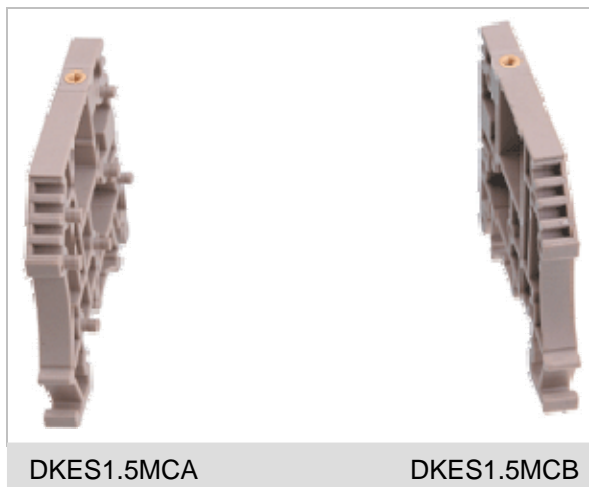

DKES1.5MCA

DKES1.5MCB