
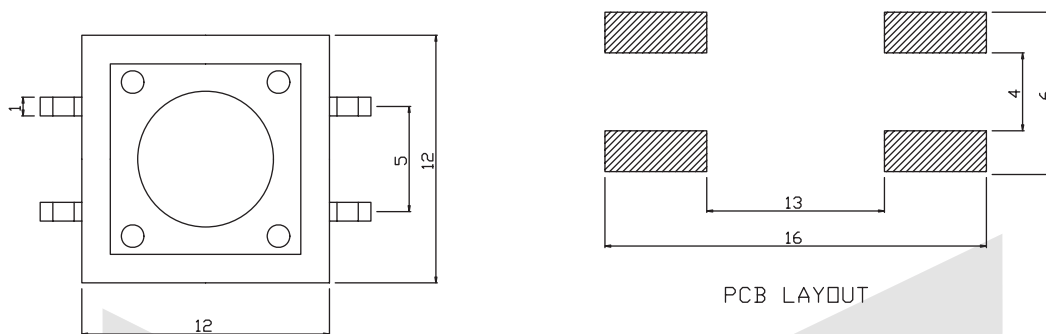


Tact Switch Series

KLS7-TS1201 12x12 Tact Switch Series

ELECTRICAL

1. Rating: 50mA 12VDC
2. Contact Resistance : 50mΩ max(initial)
3. Insulation Resistance: 100MΩ(minDC 250V)
4. Dielectric Strength : AC250V(50/60Hz for 1minute)
5. Electrically Life: 100000cycles
6. Environment temperature: -20°C~+70°C
7. Operating Force: 180/250(±30gf)
8. Seal temperature: 260°C~ 280°C

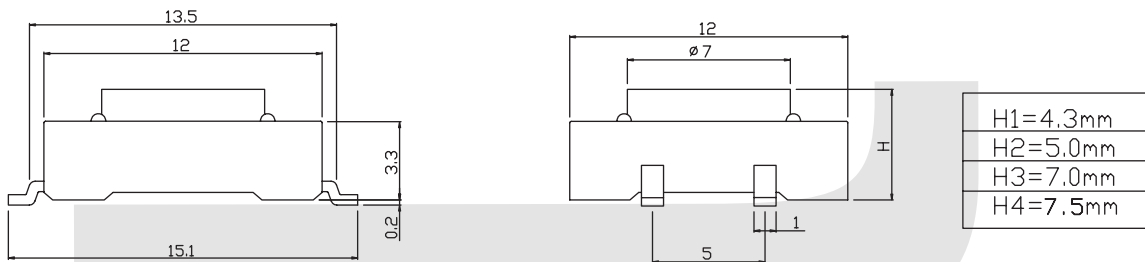

ORDER INFORMATION

KLS7-TS1201 - H1 - 180 -B

Part Number

Packing: B=Bulk T=Tape

Operating Force :180~250gf

Height:H1=4.3mm H2=5.0mm
H3=7.0mm H4=7.5mm