

Tact Switch Series



KLS7-TS3611 3x6 SMT Tact Switch Series

ELECTRICAL

1. Rating: 50mA 12VDC
2. Contact Resistance : 50mΩ max(initial)
3. Insulation Resistance: 100MΩ(minDC 250V)
4. Dielectric Strength : AC250V(50/60Hz for 1minute)
5. Electrically Life: 100000cycles
6. Environment temperature: -20°C~+70°C
7. Operating Force: 180/250(±30gf)
8. Seal temperature: 260°C~ 280°C



Dimension (unit: mm)

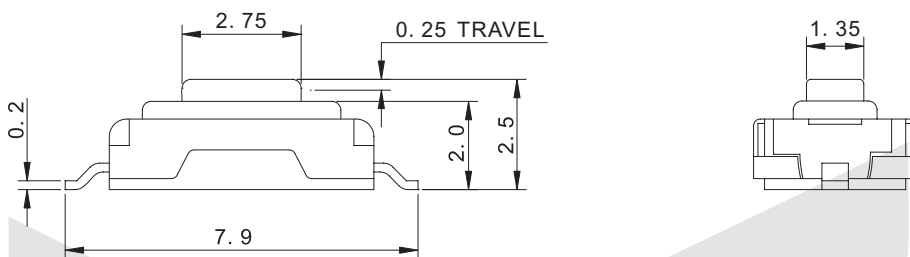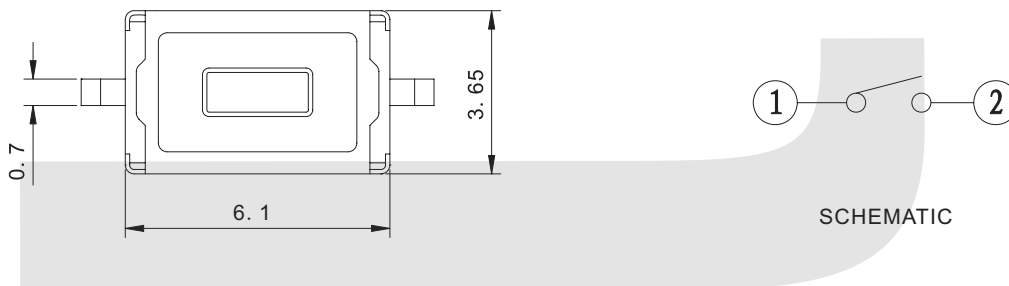

ORDER INFORMATION

KLS7-TS3611 - 2.5 - 180 - B

Series No. _____ Packing: B=Bulk T=Tape
Hight: 2.5mm _____ Operating Force :180~250gf