

## USB Series





### KLS1-153 USB-AF PCB Right Angle.DIP Double Ports Type

**Material:**

Housing: 30% Glass filled PBT UL94V-0  
Contacts: Phosphor Bronze  
Pin Plated: Gold 3u" over 50u" nickel

**Electrical Characteristics:**

Current Rating: 1 AMP  
Insulator Resistance: 1000M Ohm min. at 500 VDC  
Dielectric Withstanding Voltage:500 VAC / Minute  
Contact Resistance: 30m Ohm max.  
Temperature: -55°C ~+105°C

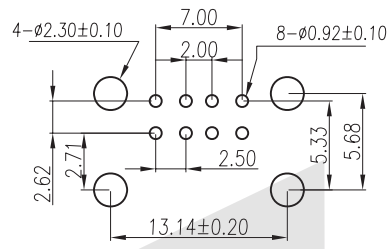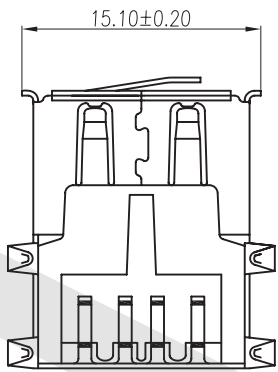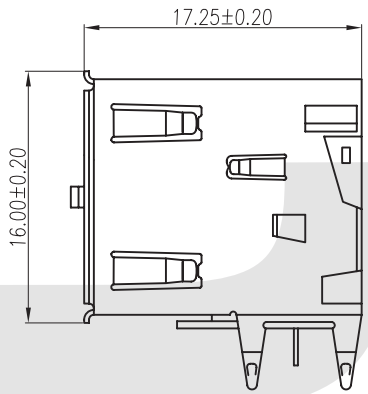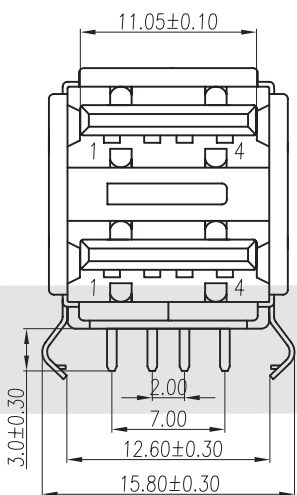

RECOMMENDED PCB LAYOUT

## ORDER INFORMATION

Product NO.: **KLS1 - 153 - B**

Pos. NO. \_\_\_\_\_  
 USB-AF PCB \_\_\_\_\_  
 Right Angle.DIP Double Ports Type \_\_\_\_\_

Color: W=White B=Black

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information