

IC SOCKET Series

KLS1-209X IC Socket With Round Pin 2.54mm(0.100")/单、双排双头插针

Electrical Characteristics:


Current Rating: 1 AMP
 Insulator Resistance: 5000MΩmin. at DC 500V
 Contact Resistance: 20mΩmax. at DC 100mA
 Operating Temperature: -45°C~+105°C

Material:


Housing: 30% Glass filled PBT UL94V-0
 Contacts: Phosphor Bronze or Brass
 Plating: Gold plated: 2u" over 50u" nickel
 Tin plated: 100u" over 50u" nickel

Features:







- * Available in both straight and right angle.
- * Side-to-side and end-to-end stackable.
- * Straight, Eight angle and Wire Wrap.

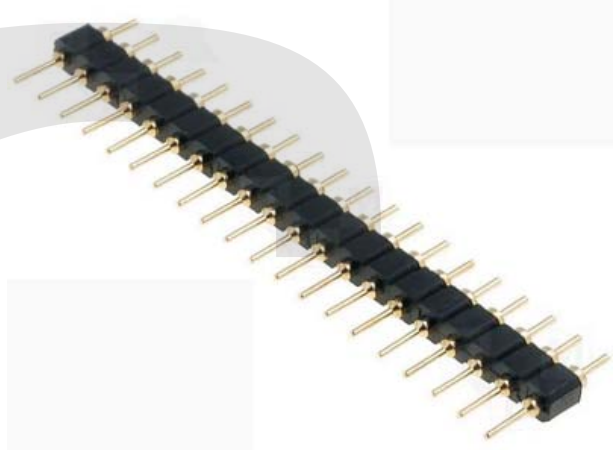

Single Row



Dual Row

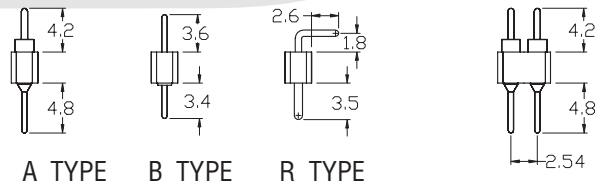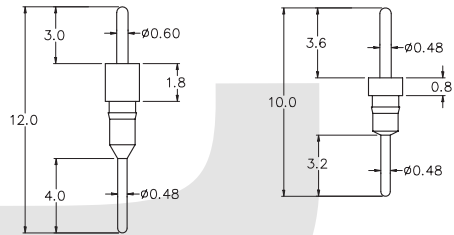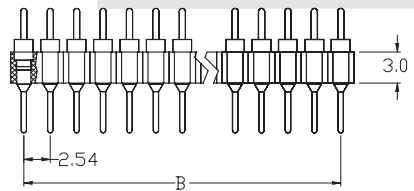

Position	2 Thru 80
Dimension	
A 0.20	2.54 X No.of Positions
B 0.15	2.54 X No.of Positions -2.54

ORDER INFORMATION

Product No.: KLS1-209X-1-XX-S

Pos. No. _____ Tail Style: S=Straight Pin R=Right Pin
 IC Socket With Round Pin 2.54mm _____ Total pin number
 _____ 1=Single layer 2=Double layer