


# Złącza BLS; BLD

Wymiary:

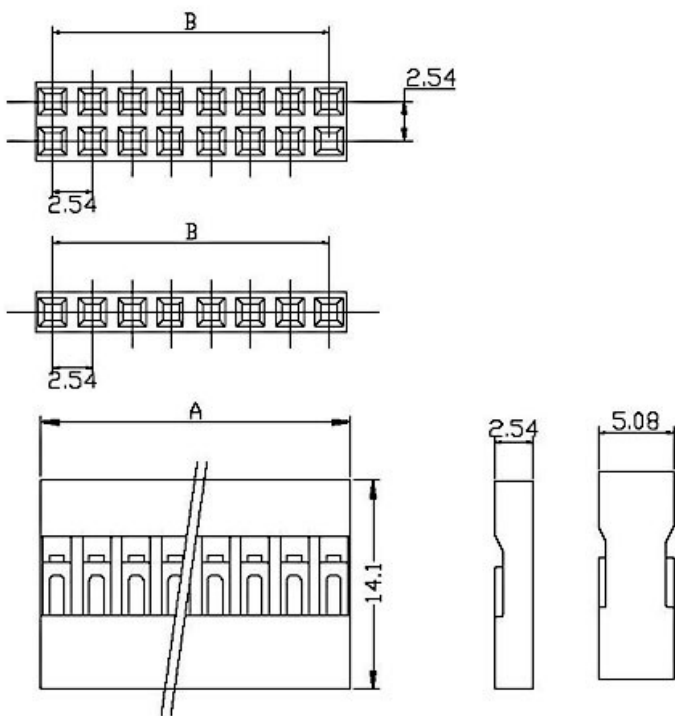

| Circuit    |          | Dimension |       |
|------------|----------|-----------|-------|
| Single Row | Dual Row | A         | B     |
| 1X1        |          | 2.84      |       |
| 1X2        | 2X2      | 5.38      | 2.54  |
| 1X3        | 2X3      | 7.92      | 5.08  |
| 1X4        | 2X4      | 10.46     | 7.62  |
| 1X5        | 2X5      | 13.00     | 10.16 |
| 1X6        | 2X6      | 15.54     | 12.70 |
| 1X7        | 2X7      | 18.08     | 15.24 |
| 1X8        | 2X8      | 20.62     | 17.78 |
| 1X9        | 2X9      | 23.16     | 20.32 |
| 1X10       | 2X10     | 25.70     | 22.86 |
| 1X11       | 2X11     | 28.24     | 25.40 |
| 1X12       | 2X12     | 30.78     | 27.94 |
| 1X13       | 2X13     | 33.32     | 30.48 |
| 1X14       | 2X14     | 35.86     | 33.02 |
| 1X15       | 2X15     | 38.40     | 35.56 |
| 1X16       | 2X16     | 40.94     | 38.10 |
| 1X17       | 2X17     | 43.48     | 40.64 |
| 1X18       | 2X18     | 46.02     | 43.18 |
| 1X19       | 2X19     | 48.56     | 45.72 |
| 1X20       | 2X20     | 51.10     | 48.26 |
| 1X21       | 2X21     | 53.64     | 50.80 |
| 1X22       | 2X22     | 56.18     | 53.34 |
| 1X23       | 2X23     | 58.72     | 55.88 |
| 1X24       | 2X24     | 61.26     | 58.42 |
| 1X25       | 2X25     | 63.80     | 60.96 |
| 1X26       | 2X26     | 66.34     | 63.50 |
| 1X27       | 2X27     | 68.88     | 66.04 |
| 1X28       | 2X28     | 71.42     | 68.58 |
|            | 2X29     | 73.96     | 71.12 |

Specyfikacja:

- Napięcie znamionowe: 250V AC, DC
- Prąd znamionowy: 2,5A
- Napięcie przebicia: 800V AC / minutę
- Temperatura pracy: od -25°C do +95°C
- Rezystancja obudowy: minimum 1000MΩ