


Power entry module Type KEB II


- Panel mount:
 - screw-on version, front or rear-side
 - snap-in version, front-side
- Appliance inlet with line switch, 2-pole
- Version with line filter/shield see page 90





We recommend for new applications type DC11

Characteristics


- All single elements are allready wired.
Unwired versions available on request.
- Line switch non-illuminated or illuminated.

Rated voltage	250 VAC
Rated current	10 A; VDE, SEV, Semko 15 A/125-250 VAC; UL, CSA
Dielectric strength (50 Hz, 1 Min.)	> 2,5 kV between L-N/ > 3 kV between L/N-PE
Allowable ambient air temperatures T _a	-25 °C to +70 °C
Degree of protection (front-side)	IP40 acc. to IEC 60529
Protection class	suitable for equipment with prot. cl. I, acc. to IEC 61140
Terminals	quick-connect 4,8 x 0,8 mm/tin-plated
Panel thickness s	screw-on: max. 6 mm snap-in: 1,5/2/2,5 mm
Materials: Housing	Thermoplastic, black, UL94 V-0
Appliance-inlet	 acc. to IEC/EN 60320-1/C14, Protection class I, pin-temperature 70 °C (cold condition)
Line switch (Rocker switch)	2-pole, non-illuminated or illuminated, acc. to IEC/EN 61058-1. Technical details see page 201

Dimensions

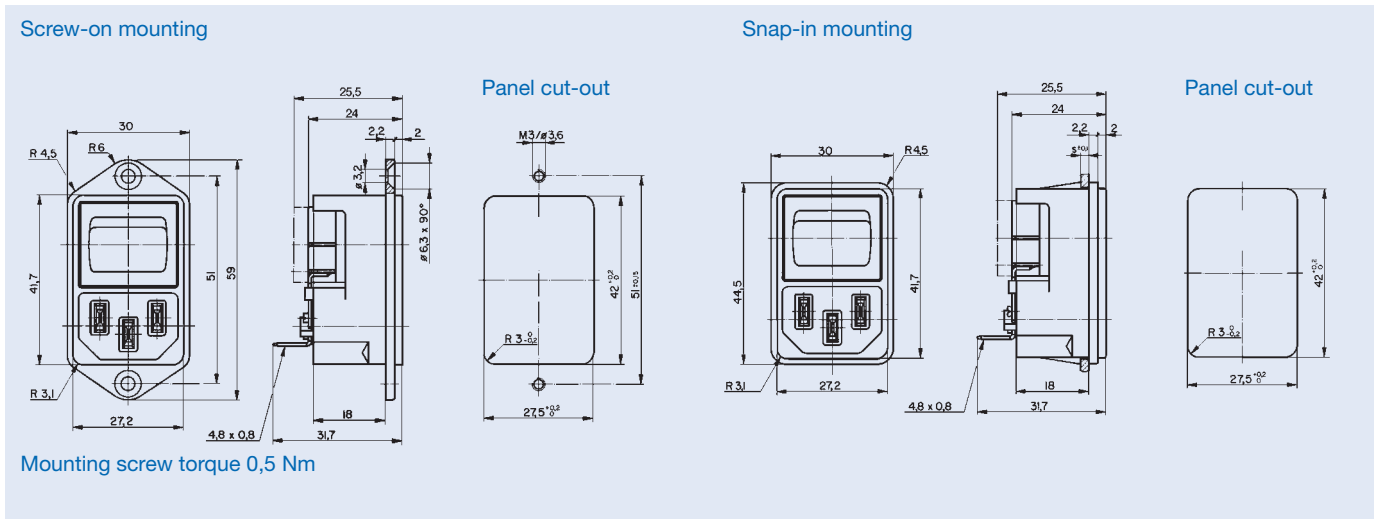

non-illuminated



illuminated

Order Numbers socket, with internal connections

	Line switch		Screw	Snap-in, panel-thickness s		
	non-illuminated	illuminated 250 V, red		illuminated 250 V, green	1,5 mm	2,0 mm
4302.2001	•		•			
4302.2002	•			•		
4302.2003	•				•	
4302.2004	•					•
4302.2101		•	•			
4302.2102		•		•		
4302.2103		•			•	
4302.2104		•				•
4302.2141			•			
4302.2142				•		
4302.2143					•	
4302.2144						•

Other versions on request:

- for protection class II
- line switch with other rocker marking
- unwired versions

Accessories see page 171