


FUSIBLE RESISTOR

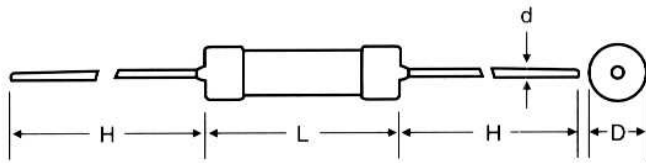

Notes: We can comply with the fusing time set by buyers but subject to notification in advance.

POWER	FUSING TIME
	Maximum
16xWattage	1 Min.
20	40 sec.
24	30 sec.
28	20 sec.
32	15 sec.

SPECIFICATIONS

POWER RATING	MAXIMUN WORKING VOLTAGE	MAXIMUN OVERLOAD VOLTAGE	DIMENSIONS(mm)				RESISTANCE RANGE
			L	D	H	d±0.02	5%
1/4W	200V	400V	6.0±0.5	2.3±0.5	28±2.0	0.52	1Ω-1KΩ
1/2W	250V	300V	9.0±0.5	3.2±0.5	26±2.0	0.60	1Ω-1KΩ
1W	300V	500V	11.0±0.5	4.2±0.5	35±3.0	0.75	1Ω-1KΩ
2W	350V	500V	15.0±1.0	5.0±0.5	33±3.0	0.75	1Ω-1KΩ
3WS	500V	500V	15.0±1.0	5.0±0.5	33±3.0	0.75	1Ω-1KΩ

ELECTRICAL PERFORMANCE

Test Items	Condition	Spec.
Adhesion Solderability	230 C° ±5 C° for 3+0.5sec	95%
Resistance Temp. Coeff.	-30 C°~ +155 C°	±200PPM/□
Short Time Overload	2.5 times of RCWV for 5 secs	±(2%+0.05Ω)
Dielectric Withstanding Voltage	Max Overload Voltage 1 Minute	±(0.5%+0.05Ω)
Temp.Cycling	-30 C° /+85 C° for 5 cycles	±(1%+0.05Ω)
Insulation Resistance	D.C.500V	1000MΩ
Moisture-Proof Load Life	40 C° 95% RH 1.5 hrs on /0.5 hr off for 1000 hrs	±(5%+0.05Ω)

RCWV: Rated Continuous Working Voltage