

AZ822

SUBMINIATURE DIP RELAY

FEATURES

- Low profile for compact board spacing
- DC coils to 48 VDC
- Life expectancy to 10 million operations
- Standard PC 0.1" grid terminal spacing
- Fits standard 16 pin IC socket
- Epoxy sealed for automatic wave soldering and cleaning
- Meets FCC Part 68.302 1500 V lightning surge
- Meets FCC Part 68.304 1000 V dielectric
- UL, CUR file E43203



CONTACTS

Arrangement	DPDT (2 Form C) Bifurcated crossbar contacts
Ratings	Resistive load: Max. switched power: 60 W or 125 VA Max. switched current: 2 A Max. switched voltage: 220 VDC or 250 VAC UL Rating: 1 A at 24 VDC 0.5 A at 120 VAC
Material	Silver palladium, gold clad
Resistance	< 50 milliohms initially

COIL

Power At Pickup Voltage (typical)	98 mW - Standard coils 74 mW - Sensitive coils
Max. Continuous Dissipation	0.94 W at 20°C (68°F)
Temperature Rise	15°C (27°F) at nominal coil voltage
Temperature	Max. 105°C (221°F)

NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Relay adjustment may be affected if undue pressure is exerted on relay case.
4. Specifications subject to change without notice.

GENERAL DATA

Life Expectancy Mechanical Electrical	Minimum operations 1 x 10 ⁸ 5 x 10 ⁵ at 1 A 30 VDC
Operate Time (typical)	5 ms at nominal coil voltage
Release Time (typical)	2 ms at nominal coil voltage (with no coil suppression)
Capacitance (max.)	Contact to contact: 1.2 pF Contact set to contact set: 1.6 pF Contact to coil: 1.5 pF
Bounce (typical)	At 10 mA contact current 2 ms at operate N.O. side 3 ms at operate N.C. side
Dielectric Strength (at sea level for 1 min.)	1000 Vrms contact to coil 1000 Vrms contact to contact 1000 Vrms between contact sets
Insulation Resistance	1000 megohms min. at 20°C, 500 VDC, 50% RH
Dropout	Greater than 5% of nominal coil voltage
Ambient Temperature Operating Storage	At nominal coil voltage -55°C (-67°F) to 90°C (194°F) -55°C (-67°F) to 105°C (221°F)
Vibration	0.062" DA at 10–55 Hz
Shock	20 g
Enclosure	P.B.T. polyester (UL94 V-0)
Terminals	Tinned copper alloy, P.C.
Max. Solder Temp.	270°C (518°F)
Max. Solder Time	5 seconds
Max. Solvent Temp.	80°C (176°F)
Max. Immersion Time	30 seconds
Weight	4.5 grams

AMERICAN ZETTLER, INC.

www.azettler.com

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

3/3/04W


AZ822

RELAY ORDERING DATA

COIL SPECIFICATIONS - STANDARD				ORDER NUMBER
Nominal Coil VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$	Must Operate VDC	
3	6.5	45	2.1	AZ822-2C-3DE
5	10.8	125	3.5	AZ822-2C-5DE
6	13.0	180	4.2	AZ822-2C-6DE
9	19.5	405	6.3	AZ822-2C-9DE
12	26.5	720	8.4	AZ822-2C-12DE
24	52.9	2880	16.8	AZ822-2C-24DE
48	103.9	11520	33.6	AZ822-2C-48DE

COIL SPECIFICATIONS - SENSITIVE				ORDER NUMBER
Nominal Coil VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$	Must Operate VDC	
3	7.5	60	2.1	AZ822-2C-3DSE
5	12.5	167	3.5	AZ822-2C-5DSE
6	15.0	240	4.2	AZ822-2C-6DSE
9	22.5	540	6.3	AZ822-2C-9DSE
12	30.0	960	8.4	AZ822-2C-12DSE
18	40.0	1620	12.6	AZ822-2C-18DSE
24	52.9	2880	16.8	AZ822-2C-24DSE
48	84.9	7680	33.6	AZ822-2C-48DSE

MECHANICAL DATA

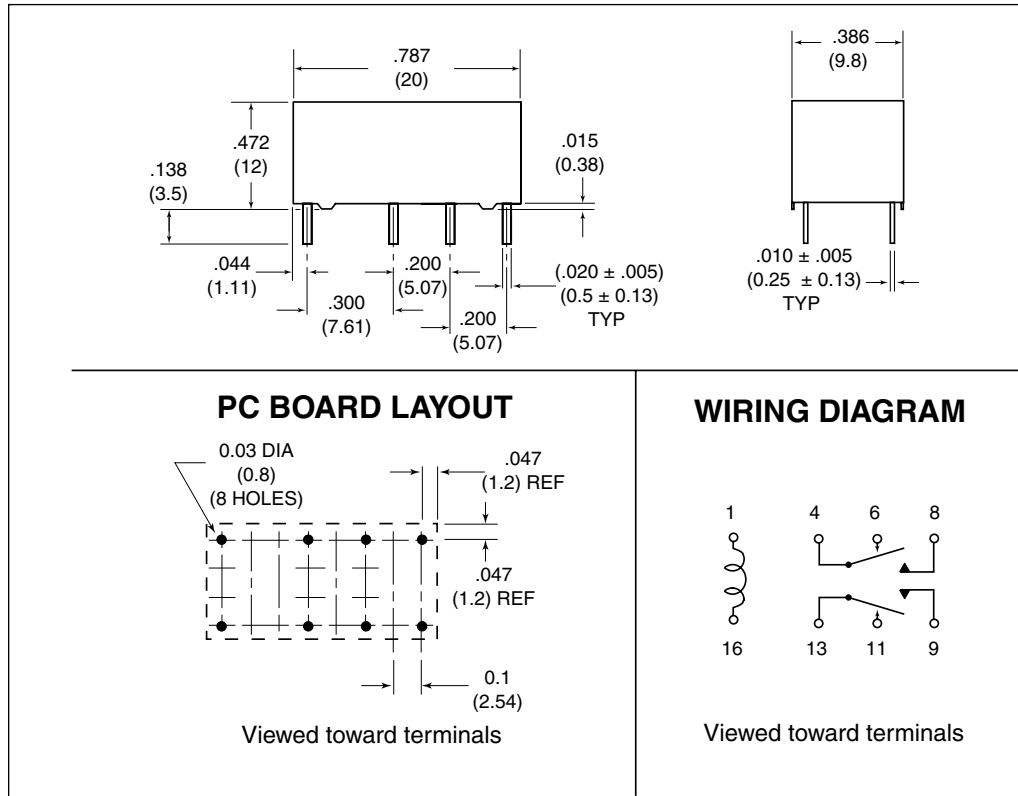

Dimensions in inches with metric equivalents in parentheses. Tolerance: $\pm .010''$

AMERICAN ZETTLER, INC.

www.azettler.com

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

3/3/04W