

**40 %  
SMALLER  
+ 100 %  
TRANSPARENT**

**=**



The COMPACT Splicing Connectors for All Wire Types [www.wago221.com](http://www.wago221.com)




# 40% SMALLER




# 100% TRANSPARENT

Wire inserted properly

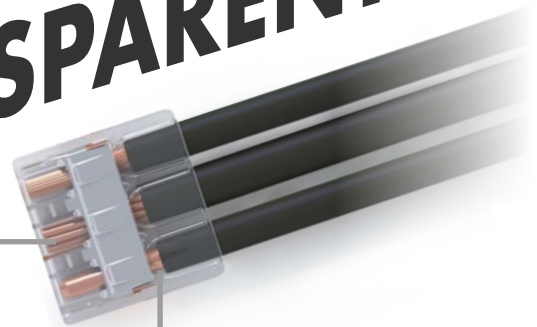


Wire stripped properly




- Nominal current: 32 A
- Nominal voltage: 450 V
- Can be used for higher temperatures:
  - Continuous service temperature: max. 105 °C
  - Ambient operating temperature: max. 85 °C (T85)

## WAGO 221: COMPACT Splicing Connectors for All Wire Types

Two test slots

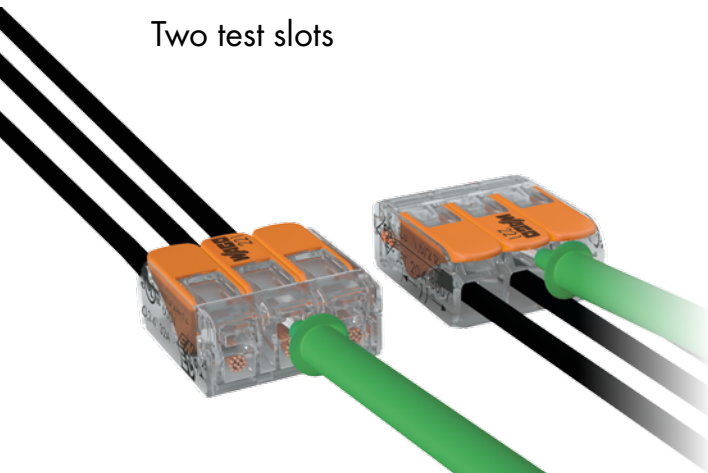

Industry's widest range of wire sizes  
Combine any type and size of wires

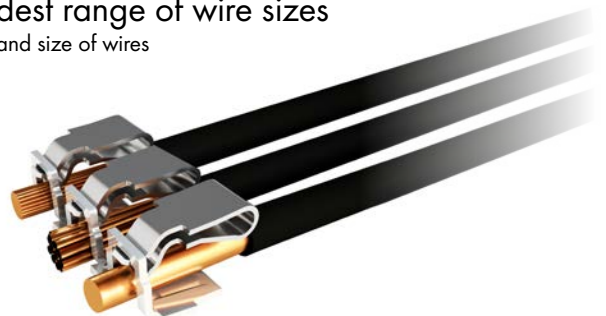

- 0.14-4 mm<sup>2</sup> (AWG 24-12) 
- 0.2-4 mm<sup>2</sup> (AWG 24-12) 

IC-NA-US-DE-FP-150304\_005 · 08888-0155/0100-6901 · Flyer 221 Series 1.0 US · 03/2015 · Printed in Germany · Subject to design changes

The new WAGO 221 – now available  
from your electrical wholesalers

Description	Item No.	Pack. Unit
2-wire connectors	221-412	100
3-wire connectors	221-413	50
5-wire connectors	221-415	25

info@wago.com · www.wago221.com

www.wago.com