

TERMINAL BLOCK Connector

Pluggable Series

KLS2-EDR-3.81/EDR-3.50 Series Pitch=3.50mm/3.81mm

Electrical :


Rated voltage: 300V
 Rated current: 8A
 Contact resistance: 20mΩ
 Insulation resistance: 5000MΩ/1000V
 Withstanding Voltage: AC1500V/1Min
 Wire range: 18AWG 1mm²

Material

Contact: Phosphor broze
 Pin header: Brass, Tin plated
 Housing: PA66, UL94V-0

Mechanical

Temp. Range: -40°C~+105°C
 MAX Soldering: +250°C for 5 Sec.
 Strip length: 5-6mm

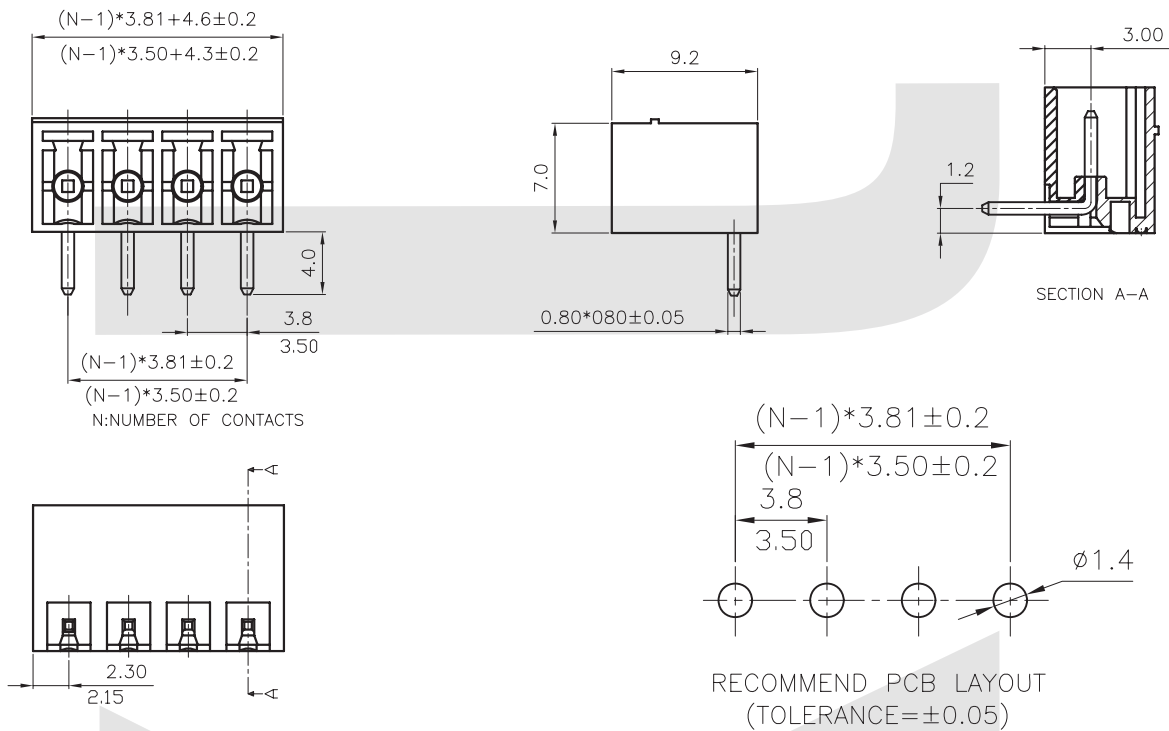

ORDER INFORMATION

Product NO.: KLS2-EDR-3.50-XXP X X

Pos. NO. _____
 Series No. _____
 Pitch: 3.50=3.50mm
 3.81=3.81mm
 Number of Pole _____

Customer Request _____
 Color: 1=Gray 2=Blue 3=Black
 4=Green 5=Orange 6=Red
 7=Transparent 8=Yellow 9=White