

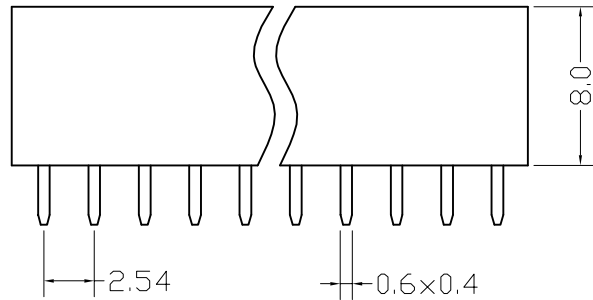


序号/RevNo.	名称/Title	文件编号/File No.
1	114双排塑料件	QJ/XYT-11125
2	114端子图(直)	QJ/XYT-11128

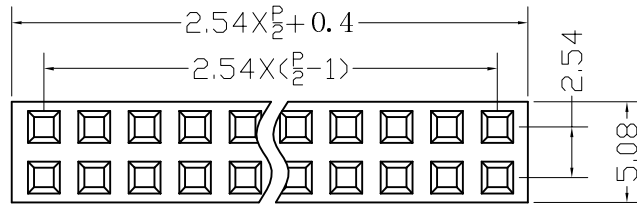

Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator Resistance: 1000MΩ min.at DC 500V
 Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute
 Operating Temperature:-55°C--+105°C
 Contact: Brass
 Housing: PBT &30% Glass Fiber(UL 94V-0)

要求:

1. 塑料件无裂痕。
2. 整排针成一直线，相邻针之间相互平行。

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
				x. ±0.2	x." ±2"
				.x ±0.1	.x" ±1"
				.xx ±0.05	.xx" ±0.5"
				.xxx ±0.01	
图名/Title		文件编号/File No.		单位/Units: mm	
114-A-DSXXG					
备注/Remark		页序/Sheet			

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date