
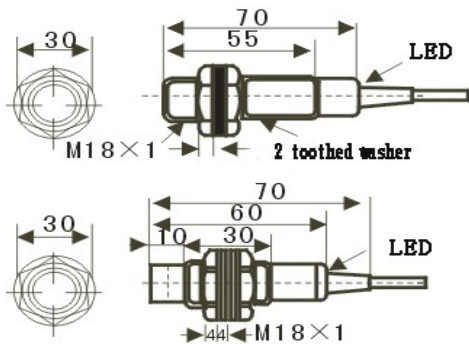


INDUCTIVE PROXIMITY SWITCH

Outward appearance code		LM18		
Appearance				
Dimension				
Non-flush	Detection distance		16mm	
	DC 10 ~ 30 V	NPN	NO	33016NA
			NC	33016NB
			NO+NC	33016NC
	~ 30 V	PNP	NO	33016PA
			NC	33016PB
			NO+NC	33016PC
	AC 90 ~250 V	two wire system	NO	
			NC	
			NO+NC	
Control output	SRC Control label silicon	NO		
		NC		
		NO+NC		
Control output	Relay output			
	DC	SCR/Relay	200mA 300mA	
Output voltage dropDC/AC		DC<3V AC<10V		
Consumption current		DC<15mA AC<10mA		
Standard detected object		18×18×1(A3 iron)		
Repeated precision		0,02		
DC/AC Response frequency		200Hz/25Hz		
Working environment temperature		-25°C~75°C		
Insulation resistance		50MΩ		
Shell material		Metal		
Protection grade		IEC standard IP67		
Alternative model at home and abroad		LJ18A3-18-□□		