
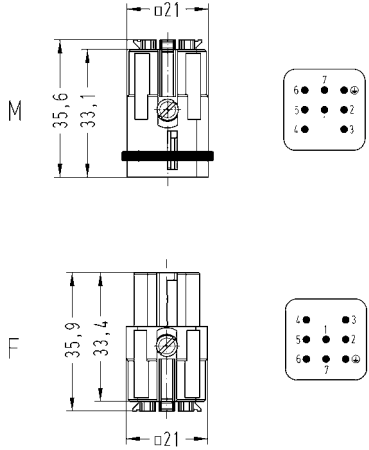

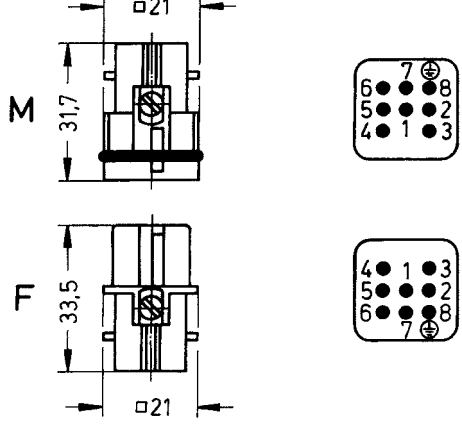


Number of contacts

7+

250 V
10 A

Han
D/DD

Identification	Wire cross section (mm ²)	Part number male female		Drawing Dimensions in mm
<p> Han-Quick Lock® Han D®, Han-Quick Lock® termination, silver plated contacts, contact resistance ≤3 mOhm</p>  <p>only for thermoplastic hoods/ housings</p>	0.25 – 1.5	09 21 007 2632	09 21 007 2732	 <p>Contact arrangement (view from termination side)</p>
<p>Han D®, Crimp terminal</p>  <p>Please order crimp contacts separately. only for thermoplastic hoods/ housings</p>		09 21 007 3031	09 21 007 3131	 <p>Contact arrangement (view from termination side)</p>