

8800 Thinline Rocker Switches 10A 250Vac



- ▶ Ultra thin rocker switch
- ▶ Ratings up to 15A, 250Vac
- ▶ Single and twin gang
- ▶ Panel cut out:
Single 17.4 x 6.8
Twin 17.4 x 13.4



10(6)A 250Vac T100
6(2)A 250Vac T100 5E4 (50,000 Operations)
Inrush 50A to EN60065:1998



UL CSA 15A 250Vac (Twin unit is 10A 250Vac)
UL CSA 125Vac 1/2hp
UL 100°C, file E45221, CSA file LR10990



RoHS compliant

3mm contact gap.
 Technical data on pages 4 & 5.

H 8800 V A - - -

TERMINAL FUNCTION ROCKER BODY PRINT, COLOUR, ETC


▶ TERMINAL	▶ FUNCTION		▶ ROCKER
<p>H</p> <p>4.8 x 0.8</p>		<p>Switches are ON when pressed over terminal 1</p>	<p>V Curved</p>
	8800	<p>ON - OFF Single pole</p>	
<p>T</p> <p>3.5 x 0.8 Solder</p>		<p>ON - OFF Single pole Lower current version - contact sales for further information</p>	
		<p>Switches are ON when pressed over terminals 1 or 3</p>	
<p>X</p> <p>0.8Sq Solder *</p> <p>*Available for single switch only, not twin</p>		<p>ON - OFF Twin (Single pole)</p>	



BODY


OPTIONS

A Single pole

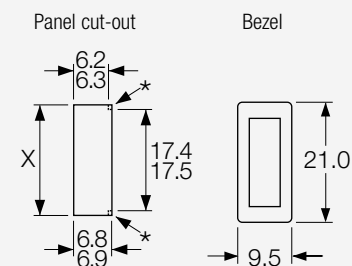

*Optional profile for orientation

A Single pole - Twin

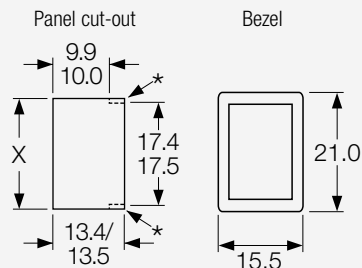

*Optional profile for orientation

Panel thickness	Dim X
0.75-1.24	19.1/19.2
1.25-1.99	19.3/19.4
2.00-3.00	19.7/19.8

Cut-outs must be punched in the direction of insertion

Finish

Matt finish only.

Colour


Call sales for custom colours. A full range is available for large orders.

Legend printing


Select from the examples or call sales for custom legends.

Dimensions (mm)

8800VA (H terminals shown)

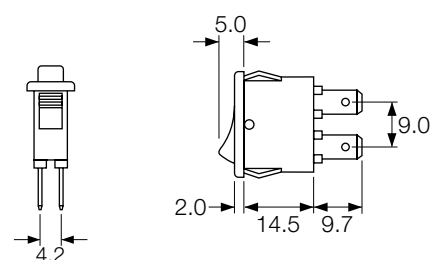

8800V/8800VA (H terminals shown)

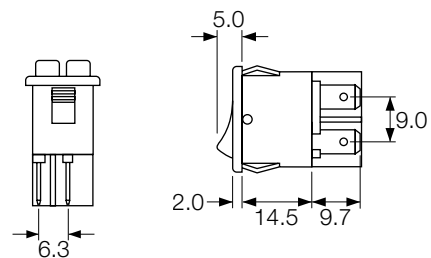

Examples of printing

