



KPI-4320 series Piezo Buzzer

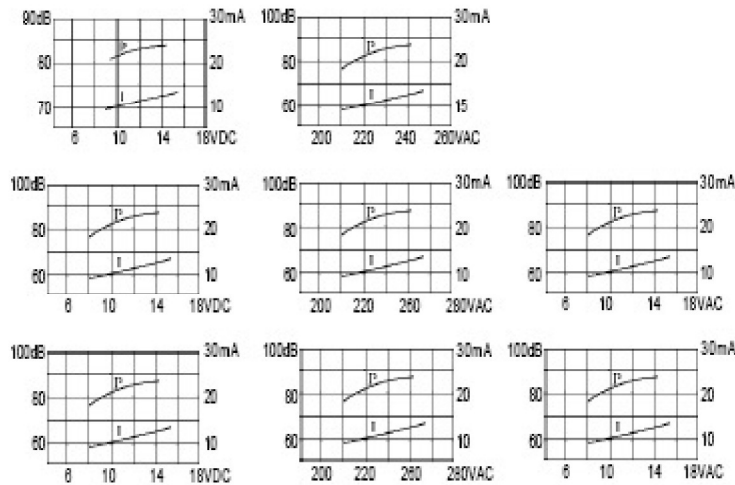

color Black
PC Housing Material
Screw Terminal

DIMENSIONS

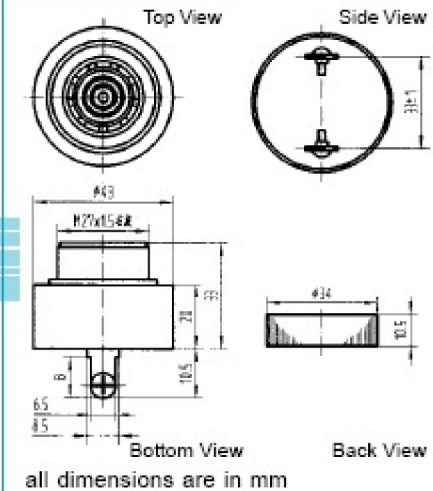

all dimensions are in mm

Model No	KPI-4320	KPI-4320-230	KPI-4321	KPI-4321-230	KPI-4321-12	KPI-4322	KPI-4322-230	KPI-4322-12
Rated Voltage	12VDC	230VAC	12VDC	230VAC	12VAC	12VDC	230VAC	12VAC
Operating Voltage	6-28VDC	200-240VAC	6-28VDC	200-240VAC	6-15VAC	6-28VDC	200-240VAC	6-15VAC
Max. Rated Current	20mA at 12VDC	20mA at 230VAC/DC	20mA at 12VDC	20mA at 230VAC	20mA at 12VAC	20mA at 12VDC	20mA at 230VAC	20mA at 12VAC
Min. Sound Pressure Level	80dB at 12VDC/80cm	80dB at 230VAC/80cm	80dB at 12VDC/80cm	80dB at 230VAC/80cm	80dB at 12VAC/80cm	80dB at 12VDC/80cm	80dB at 230VAC/80cm	80dB at 12VAC/80cm
Resonant Frequency	2.9;±0.5KHz	2.9;±0.5KHz	2.9;±0.5KHz	2.9;±0.5KHz	2.9;±0.5KHz	2.9;±0.5KHz	2.9;±0.5KHz	2.9;±0.5KHz
Tone Nature	Continuous	Continuous	Slow Pulse	Slow Pulse	Slow Pulse	Fast Pulse	Fast Pulse	Fast Pulse
Operating Temperature	-20~+80;±	-20~+80;±	-20~+80;±	-20~+80;±	-20~+80;±	-20~+80;±	-20~+80;±	-20~+80;±
Weight	40g	40g	40g	40g	40g	40g	40g	40g

* Value applying at rated voltage