


■ SPECIFICATION

- Voltage rating: 250V AC, DC
- Current Rating: 5A, AC, DC
- Withstand voltage: 1500V AC/minute
- Contact resistance: 10mΩ max
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C ~ +85° C

■ HOUSING

- Material: Nylon66 UL94V-0/2

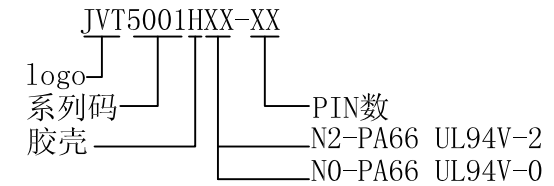

PIN	DIM. (mm)	
	A	B
02	3.96	8.43
03	7.92	12.39
04	11.88	16.35
05	15.84	20.31
06	19.80	24.27
07	23.76	28.23
08	27.72	32.19
09	31.68	36.15
10	35.64	40.11
11	39.60	44.07
12	43.56	48.03
13	47.52	51.99
14	51.48	55.95
15	55.44	59.91
16	59.40	63.87
17	63.36	67.83
18	67.32	71.79
19	71.28	75.75
20	75.24	79.71

GENERAL TOLERANCE	
0	±0.40
.0	±0.30
.00	±0.20
.000	±0.10

版本	变更内容	日期			单位	mm	比例	1:1	日期	20150320
----	------	----	--	--	----	----	----	-----	----	----------

**乔业电子有限公司**  
 CHYAO YEE CONNECTORS CO., L TD

核准	审核	绘图	品名	MOLEX3.96 HSG		
	CHEN	TONY	料号	JVT5001HXX-XX		
			图名	050	版本	A