


## 1500 Standard

- Standard Rocker Switch
- Non-illuminated
- 1300 high in-rush current
- Choice of switching circuits including 3 position
- Choice of bezel styles
- Choice of panel cut outs
- Matching indicator
- Single pole
- Splashproof option
- Bezel size: 'A' style 30.2 x 14.0

## 16A / 250Vac

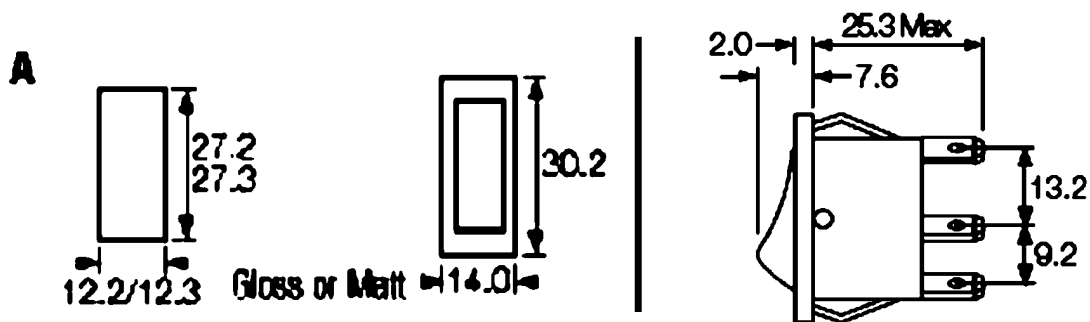

1500 Series 16(4)A 250Vac T125

UL CSA 16A Non Ind 250Vac, (2 posn) 250Vac 1hp, 125Vac 1/2hp,  
(3posn) 250 Vac 1/2hp, 125Vac 1/4hp.



UL 10A 14Vdc 'T' (1500 and 1510 only)

UL 85°C, file E45221, CSA file LR10990.



20A 28Vdc



1300 series 16(6)A 250Vac T125 5E4 (50,000 Ops.)

Ⓢ150A Inrush to EN61058-1



UL CSA 20A 250Vac 1hp, 125Vac 1/2hp.

UL 85°C, file E45221, CSA file LR10990



20A 28Vdc



RoHS Compliant

--

Number	Function	Notes
<b>Standard</b>		
1500	ON-OFF	
1501	ON-OFF	Momentary ON
1502	ON-OFF	Momentary OFF
1510	ON-ON	
1511	ON-ON	Momentary 1 side
1520	ON-OFF-ON	
1521	ON-OFF-ON	Momentary 1 side
1522	ON-OFF-ON	Momentary 2 side

**High-Inrush**

1300	ON-OFF
------	--------

**Indicator**

0430	Indicator
------	-----------

--

**Terminal Options**

Code	Size
C	6.3x0.8mm
H	4.8x0.8mm
K	2.8x0.8mm
T	Solder
U	Right Angle Solder
X	PCB

**Panel and Bezel Dimensions (mm)**

Code	Panel Cut Out	Bezel
A	12.2x27.2	14.0x30.2
B	11.0x30.0	14.0x33.4
L	11.0x30.0	14.0x32.0
Q	11.5x28.2	14.0x30.2
R	14.0x28.5	17.0x31.5
T	11.5x28.2	14.0x30.2

**Rocker Options**

Code	Profile
A	Softline matt
B	Splash proof matt
V	Curved matt or gloss
W	Splashproof matt
X	Two colour matt ON-OFF only
F	Flat lens gloss - 0430 only
A	Softline lens Matt - 0430 only
H	Slotted for custom adaptors