

L-937EGW HIGH EFFICIENCY RED/GREEN

### Features


- UNIFORM LIGHT OUTPUT.
- LOW POWER CONSUMPTION.
- I.C. COMPATIBLE.
- LONG LIFE - SOLID STATE RELIABILITY.

### Description

The High Efficiency Red source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Orange Light Emitting Diode.

The Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

### Package Dimensions

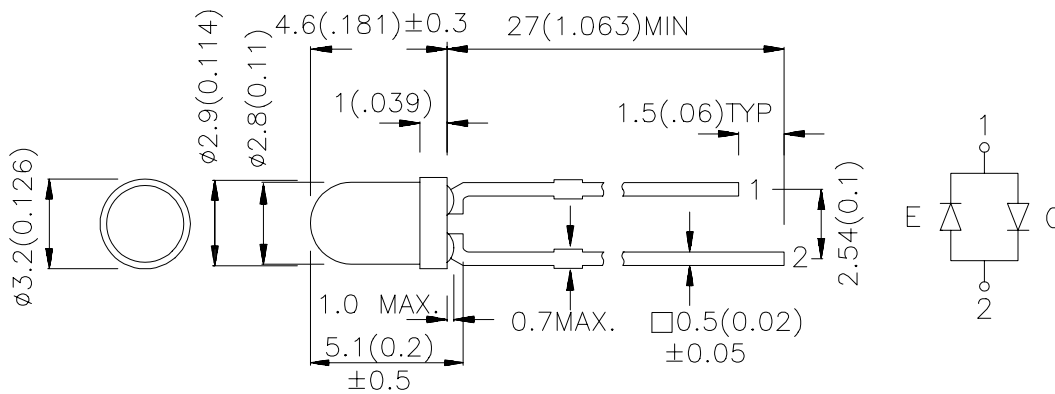

#### Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.25 (0.01)$  unless otherwise noted.
3. Lead spacing is measured where the lead emerge package.
4. Specifications are subject to change without notice.

## Selection Guide

| Part No. | Dice                           | Lens Type      | Iv (mcd)<br>@ 20 mA |      | Viewing<br>Angle |
|----------|--------------------------------|----------------|---------------------|------|------------------|
|          |                                |                | Min.                | Typ. | 2θ1/2            |
| L-937EGW | HIGH EFFICIENCY RED(GaAsP/GaP) | WHITE DIFFUSED | 7                   | 20   | 60°              |
|          | GREEN(GaP)                     |                | 7                   | 16   |                  |

Note:

1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.

## Electrical / Optical Characteristics at T<sub>A</sub>=25°C


| Symbol            | Parameter                | Device                       | Typ.       | Max.       | Units | Test Conditions           |
|-------------------|--------------------------|------------------------------|------------|------------|-------|---------------------------|
| λ <sub>peak</sub> | Peak Wavelength          | High Efficiency Red<br>Green | 627<br>565 |            | nm    | I <sub>F</sub> =20mA      |
| λ <sub>D</sub>    | Dominate Wavelength      | High Efficiency Red<br>Green | 625<br>568 |            | nm    | I <sub>F</sub> =20mA      |
| Δλ <sub>1/2</sub> | Spectral Line Half-width | High Efficiency Red<br>Green | 45<br>30   |            | nm    | I <sub>F</sub> =20mA      |
| C                 | Capacitance              | High Efficiency Red<br>Green | 15<br>15   |            | pF    | V <sub>F</sub> =0V;f=1MHz |
| V <sub>F</sub>    | Forward Voltage          | High Efficiency Red<br>Green | 2.0<br>2.2 | 2.5<br>2.5 | V     | I <sub>F</sub> =20mA      |

## Absolute Maximum Ratings at T<sub>A</sub>=25°C

| Parameter                     | High Efficiency Red | Green | Units |
|-------------------------------|---------------------|-------|-------|
| Power dissipation             | 105                 | 105   | mW    |
| DC Forward Current            | 30                  | 25    | mA    |
| Peak Forward Current [1]      | 160                 | 140   | mA    |
| Operating/Storage Temperature | -40°C To +85°C      |       |       |
| Lead Solder Temperature [2]   | 260°C For 5 Seconds |       |       |

Notes:

- 1/10 Duty Cycle, 0.1ms Pulse Width.
- 2mm below package base.

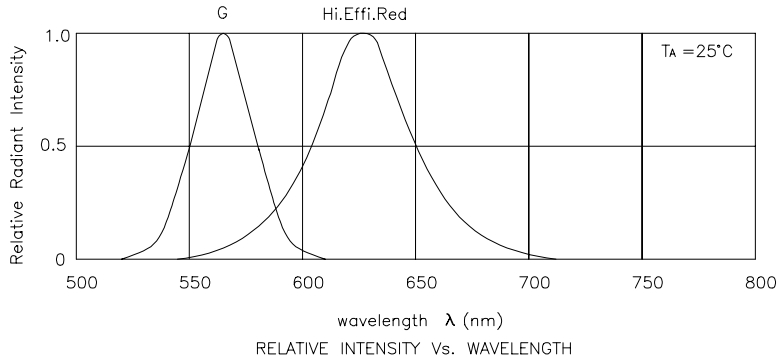

## High Efficiency Red/Green L-937EGW

