





APPROVALS:   RoHS    (submitted)

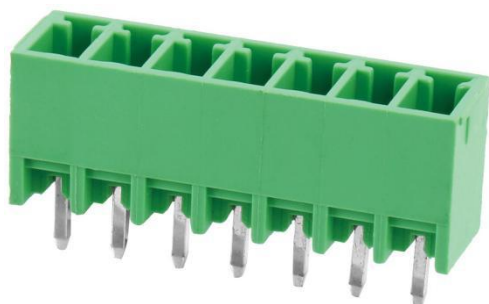

## PART NO.:15EGTVC-3.5

- Pluggable Terminal Block,
- Nominal Current(UL): 8A
- Rated Voltage(UL): 300V
- Number of Positions: 2P-24P
- Standard Color: Green

## DRAWINGS:

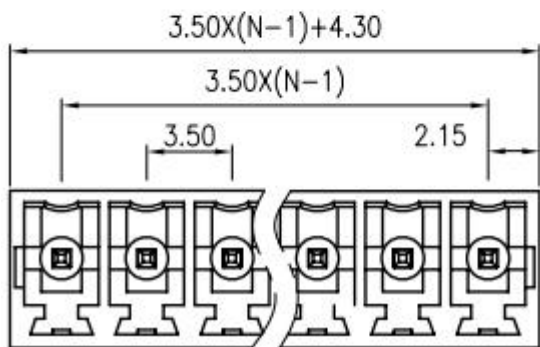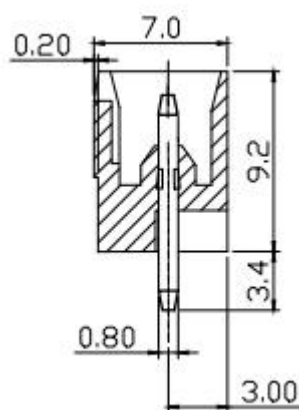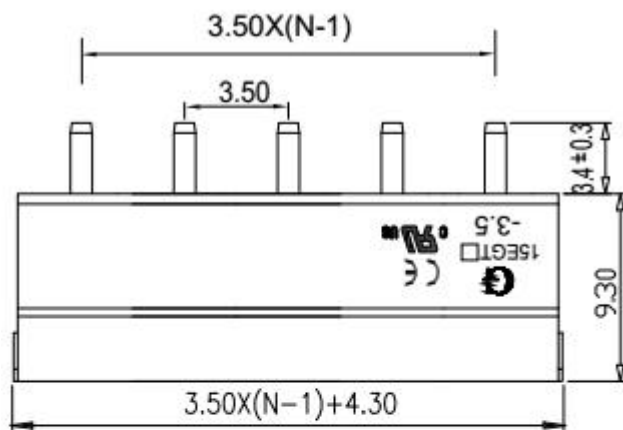

## TECHINICAL DATA:

Electrical		
Standard	UL	IEC
Rated voltage	300V	250V
Rated Current	8A	7A
Wire Range	—	—
Withstanding voltage	AC2000V/1Min	
Mechanical		
Torque	—	
Operation temperature	-40°C~+105°C	
Strip length	—	
Dimensions		
Pitch	3.5mm	
Poles	2P-24P	
Material		
Housing	PA66,UL94V-0	
Screws	—	
Cage	—	
Pin header	Brass,SnCe	

## APPLICATION:

Elevator, Industry, Security, Instrument, Machinery, Communication, Lighting, Construction, Electrical

## MATCHING PARTS:

Female male	<b>15EGTK-3.5</b>	<b>15EGTKA/B-3.5</b>
<b>15EGTVC-3.5</b>	√	√