

SPECIFICATIONS

MODEL : KD2406PTB2
P/N : (2).GN

- 1-1. Rated Voltage : 24 VDC
- 1-2. Operating Voltage Range : 12~27.6 VDC
- 1-3. Starting Voltage : 12 VDC (25 deg. C POWER ON/OFF)
- 1-4. Rated Speed : 3800 RPM ± 20%
- 1-5. Air Delivery : 19.3 CFM
- 1-6. Static Pressure : 0.15 Inch-H₂O
- 1-7. Rated Current : 60 mA
- 1-8. Rated Power : 1.4 WATTS
- 1-9. Noise Level : 30 dB(A)
- 1-10. Direction of Rotation : Counter-clockwise viewed from front of fan blade
- 1-11. Operating Temperature : -10 to +70 deg. C
- 1-12. Storage Temperature : -40 to +70 deg. C
- 1-13. Bearing System : Precision ball bearing system
- 1-14. Weight : 56 g
- 1-15. Safety : UL/CUR/TUV/CE Approvals
- 1-16. Protection : **Automatic Restart Capability**
 Note: In a situation where the fan is locked by an external force while the electricity is on, an increase in coil temperature will be prevented by temporarily turning off the electrical power to the motor. The fan will automatically restart when the locked rotor condition is released.

Polarity Protection

建準電機工業股份有限公司 SUNONWEALTH ELECTRIC MACHINE INDUSTRY CO., LTD.	SPEC.NO	D06031030G-00	REVISION DATE	07.03.2009
	ISSUE DATE	09.13.2005	E D I T I O N	研發部
	P A G E	3 OF 9		2010.03.16




MODEL : KD2406PTB2

P/N : (2).GN

PERFORMANCE CURVES


**STATIC
 PRESSURE**

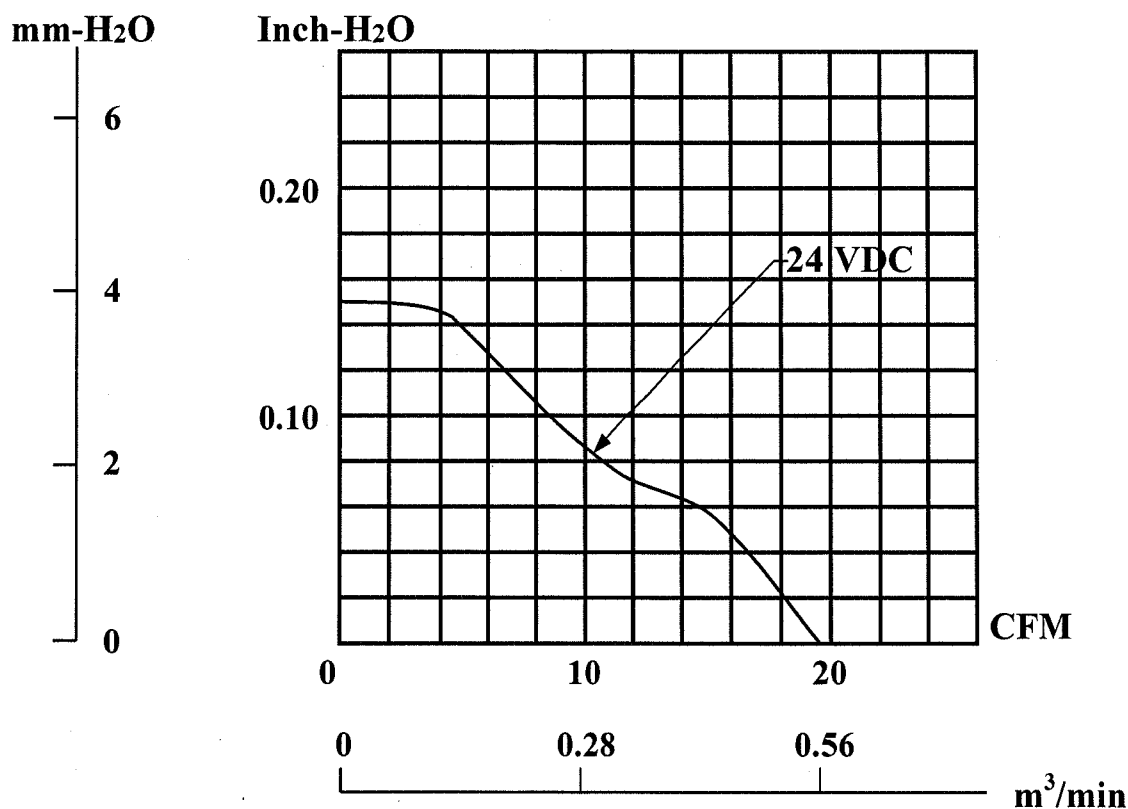

MATERIAL

- 2-1. Frame : Thermoplastic PBT of UL 94V-0
- 2-2. Impeller : Thermoplastic PBT of UL 94V-0
- 2-3. Lead Wire : UL1007,26 awg,+RED,-BLACK

DIMENSIONS

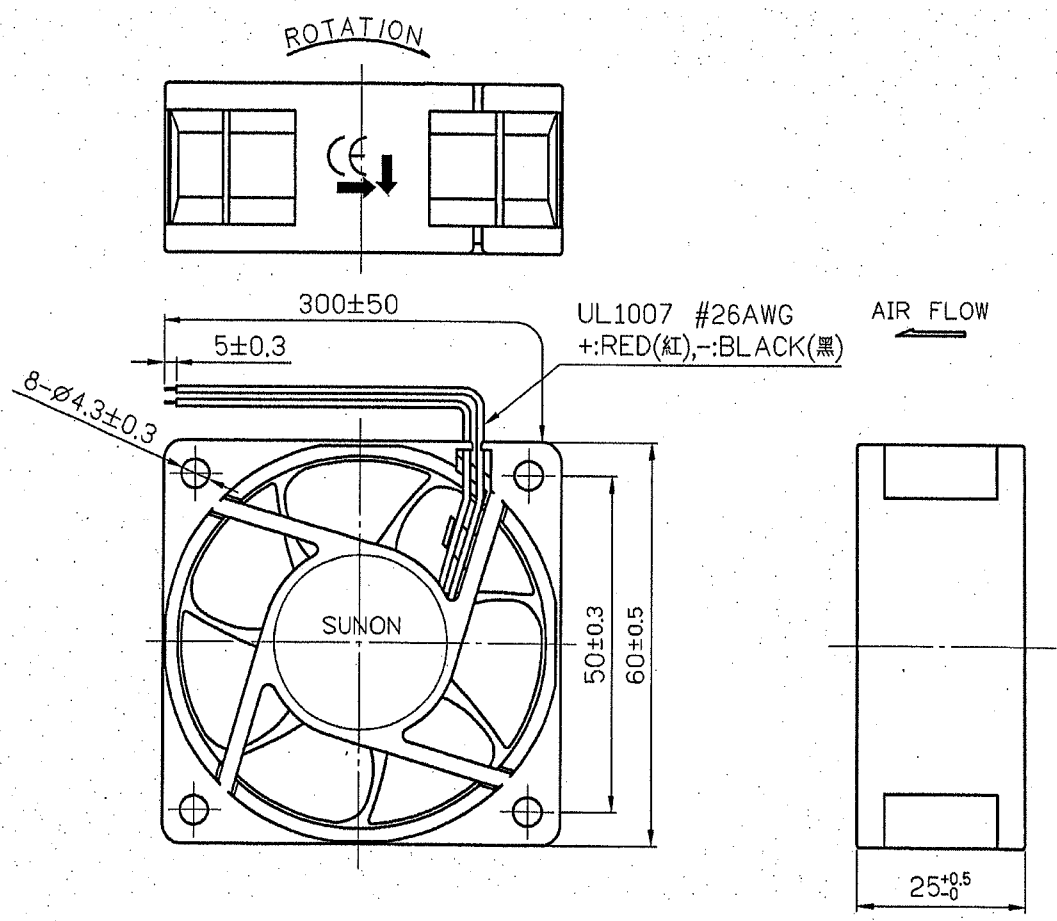

- 1. Air Flow Direction: Toward label side.
- 2. Best Mounting Direction: Any orientation.

UNITS: mm

建準電機工業股份有限公司 SUNONWEALTH ELECTRIC MACHINE INDUSTRY CO., LTD.	SPEC.NO	D06031030G-00	REVISION DATE	07. 03. 2009
	ISSUE DATE	09. 13. 2005	EDITION	電機工業(股) 研發部
	PAGE	5 OF 9		

