

DB101(S) THRU DB107(S)

SINGLE PHASE 1.0AMP. GLASS PASSIVATED BRIDGE RECTIFIERS


Voltage Range
50 to 1000 Volts
Current
1.0Ampere

FEATURES

- UL Recognized File # E-230084
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique
- High temperature soldering guaranteed: 250°C/10 seconds / 0.375"(9.5mm) lead length at 5 lbs.,(2.3kg)tension
- Small size, simple installation
Leads solderable per MIL-STD-202, Method 208
- High surge current capability

DB

DBS

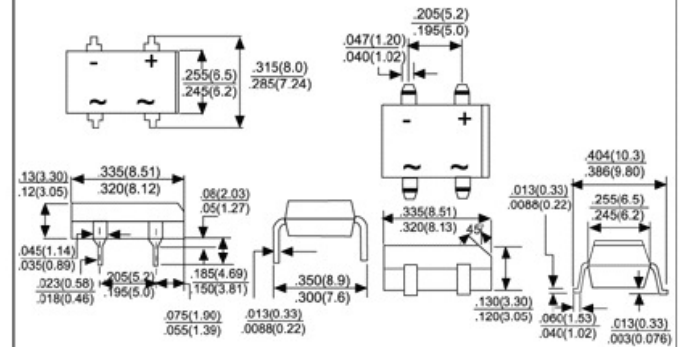

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%

Type Number		DB101	DB102	DB103	DB104	DB105	DB106	DB107	UNITS
		DB 101S	DB 102S	DB 103S	DB 104S	DB 105S	DB 106S	DB 107S	
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @T _A = 40°C	I _{F(AV)}	1.0							A
Peak Forward Surge Current 8.3 ms Single Half Sine-wave Superimposed on Rated load (JEDEC method)	I _{FSM}	50							A
Maximum Instantaneous Forward Voltage Drop Per leg @ 1.0A	V _F	1.1							V
Maximum DC Reverse Current at Rated DC Blocking Voltage @ T _A = 25°C @ T _A = 125°C	I _R	10 500							µA µA
Operating Temperature Range	T _J	-55 to +150							°C
Storage Temperature Range	T _{STG}	-55 to +150							°C

Note: DBS for Surface Mount Package.

RATING AND CHARACTERISTIC CURVES DB101(S) THRU DB107(S)

FIG.1 - MAXIMUM DERATING CURVE FOR OUTPUT RECTIFIED CURRENT




FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

