



Feature

- Width only 52.5mm (3SU)
- 4:1 ultra wide input range
- -40~+85°C wide working temperature
- No minimum load required
- DC output adjustable ($\pm 10\%$)
- Cooling by free air convection
- Can be installed on DIN rail TS-35/7.5 or 15
- Protections: Short circuit / Overload / Over voltage / Input reverse polarity / Input under voltage protection
- 4KVdc I/O isolation(Reinforced isolation)
- 3 years warranty

Applications

- Industrial control system
- Semi-conductor fabrication equipment
- Factory automation
- Electro-mechanical
- Wireless network
- Telecom or datacom system


Description

DDR-60 series is a 60W DIN Rail type DC-DC converter with main features including DIN rail-type easy installation, ultra slim width (52.5mm), 4:1 ultra wide input voltage, -40~+85°C wide operating temperature, 4KVdc I/O isolation, adjustable output voltage ($\pm 10\%$) and full protective functions...etc.

This series has two input options: 9~36V / 18~75V and various output options: 5V / 12V / 15V / 24V and can be used for industrial control, security control, communication system and other fields. Suitable applications are DC buck/boost regulator, increasing system insulation level and voltage drop compensation along cable...etc.

Model Encoding

DDR - 60 G -24

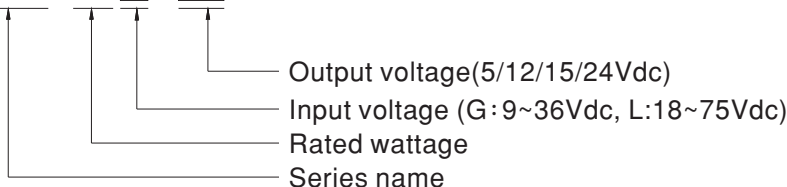








SPECIFICATION

| MODEL | | DDR-60G-5 | DDR-60G-12 | DDR-60G-15 | DDR-60G-24 | DDR-60L-5 | DDR-60L-12 | DDR-60L-15 | DDR-60L-24 | |
|----------------------------------|--|---|--------------|-----------------------------|-------------------------------------|---|--------------|----------------|------------|--|
| OUTPUT | DC VOLTAGE | 5V | 12V | 15V | 24V | 5V | 12V | 15V | 24V | |
| | RATED CURRENT | 10.8A | 5A | 4A | 2.5A | 12A | 5A | 4A | 2.5A | |
| | CURRENT RANGE | 0 ~ 10.8A | 0 ~ 5A | 0 ~ 4A | 0 ~ 2.5A | 0 ~ 12A | 0 ~ 5A | 0 ~ 4A | 0 ~ 2.5A | |
| | RATED POWER | 54W | 60W | 60W | 60W | 60W | 60W | 60W | 60W | |
| | RIPPLE & NOISE (max.) Note.2 | 60mVp-p | 75mVp-p | 75mVp-p | 100mVp-p | 60mVp-p | 75mVp-p | 75mVp-p | 100mVp-p | |
| | VOLTAGE ADJ. RANGE | 4.5 ~ 5.5V | 9 ~ 13.2V | 13.5 ~ 16.5V | 21.6 ~ 28V | 4.5 ~ 5.5V | 9 ~ 13.2V | 13.5 ~ 16.5V | 21.6 ~ 28V | |
| | VOLTAGE TOLERANCE Note.3 | ±2.0% | ±2.0% | ±2.0% | ±2.0% | ±2.0% | ±2.0% | ±2.0% | ±2.0% | |
| | LINE REGULATION | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | |
| | LOAD REGULATION | ±1.5% | ±0.5% | ±0.5% | ±0.5% | ±1.5% | ±0.5% | ±0.5% | ±0.5% | |
| | SETUP, RISE TIME | 120ms, 85ms at full load | | | | | | | | |
| HOLD UP TIME (Typ.) | G-type: 5ms@24Vdc input | | | | L-type: 10ms@48Vdc input | | | | | |
| EXTERNAL CAPACITANCE LOAD (Max.) | 6800 μF | 4700 μF | 3300 μF | 2200 μF | 6800 μF | 4700 μF | 3300 μF | 2200 μF | 2200 μF | |
| INPUT | VOLTAGE RANGE Note.4 | 9 ~ 36Vdc | | | | 18 ~ 75Vdc | | | | |
| | EFFICIENCY (Typ.) | 87.5% | 91% | 91% | 91% | 87.5% | 91% | 92% | 92% | |
| | DC CURRENT (Typ.) | 3A/24Vdc | | | | 1.5A/48Vdc | | | | |
| | INRUSH CURRENT (Typ.) | 20A/24Vdc | | | | 20A/48Vdc | | | | |
| PROTECTION | OVERLOAD | 105 ~ 135% rated output power Protection type : Constant current limiting, recovers automatically after fault condition is removed | | | | | | | | |
| | OVER VOLTAGE | 5.75 ~ 7V | 13.8 ~ 16.2V | 17.25 ~ 20.25V | 28.8 ~ 34V | 5.75 ~ 7V | 13.8 ~ 16.2V | 17.25 ~ 20.25V | 28.8 ~ 34V | |
| | REVERSE POLARITY | By internal MOSFET, no damage, recovers automatically after fault condition removed | | | | | | | | |
| | UNDER VOLTAGE LOCKOUT | 24Vin (G-type):Power ON ≥ 9V , OFF ≤ 8.5V 48Vin (L-type):Power ON ≥ 18V , OFF ≤ 17V | | | | | | | | |
| ENVIRONMENT | WORKING TEMP. | -40 ~ +85°C (Refer to "Derating Curve") | | | | | | | | |
| | WORKING HUMIDITY | 5 ~ 95% RH non-condensing | | | | | | | | |
| | STORAGE TEMP., HUMIDITY | -40 ~ +85°C , 5 ~ 95% RH non-condensing | | | | | | | | |
| | TEMP. COEFFICIENT | ±0.03%/°C (0 ~ 60°C) | | | | | | | | |
| | VIBRATION | Component:10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6 | | | | | | | | |
| | OPERATING ALTITUDE | 5000 meters | | | | | | | | |
| SAFETY & EMC (Note 5) | SAFETY STANDARDS | IEC 62368-1, UL 62368-1, AS/NZS 62368-1, EAC TP TC 004 approved | | | | | | | | |
| | WITHSTAND VOLTAGE | I/P-O/P:4KVdc | | | | | | | | |
| | ISOLATION RESISTANCE | I/P-O/P>100M Ohms / 500Vdc / 25°C / 70% RH | | | | | | | | |
| | EMC EMISSION | Parameter | Standard | | | Test Level / Note | | | | |
| | | Conducted | EN55032 | | | Class A | | | | |
| | | Radiated | EN55032 | | | Class A for 1m I/O cable , Class B for 30cm I/O cable | | | | |
| | | Voltage Flicker | EN61000-3-3 | | | ----- | | | | |
| | EMC IMMUNITY | EN55024 , EN61000-6-2(EN50082-2) | | | | | | | | |
| | | Parameter | Standard | | | Test Level / Note | | | | |
| | | ESD | EN61000-4-2 | | | Level 3, 8KV air ; Level 3, 6KV contact; criteria A | | | | |
| Radiated | | EN61000-4-3 | | | Level 3, 10V/m ; criteria A | | | | | |
| EFT / Burst | | EN61000-4-4 | | | Level 3, 2KV ; criteria A | | | | | |
| Surge | | EN61000-4-5 | | | Level 3, 1KV/Line-Line ; criteria A | | | | | |
| Conducted | | EN61000-4-6 | | | Level 3, 10V ; criteria A | | | | | |
| Magnetic Field | EN61000-4-8 | | | Level 4, 30A/m ; criteria A | | | | | | |
| OTHERS | MTBF | 611K hrs min. MIL-HDBK-217F (25°C) | | | | | | | | |
| | DIMENSION | 52.5*90*54.5mm (W*H*D) | | | | | | | | |
| | PACKING | 216g; 60pcs/14Kg/0.97CUFT | | | | | | | | |
| NOTE | <p>1. All parameters NOT specially mentioned are measured at normal input (G:24Vdc, L:48Vdc), rated load and 25°C of ambient temperature.</p> <p>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 μf & 47 μf parallel capacitor.</p> <p>3. Tolerance : includes set up tolerance, line regulation and load regulation.</p> <p>4. Derating may be needed under low input voltage. Please check the derating curve for more details.</p> <p>5.The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com)</p> <p>6. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).</p> <p>※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx</p> | | | | | | | | | |


■ Block Diagram

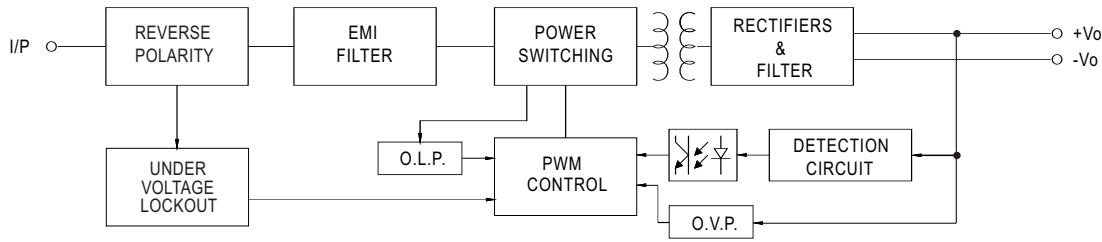



■ Derating Curve

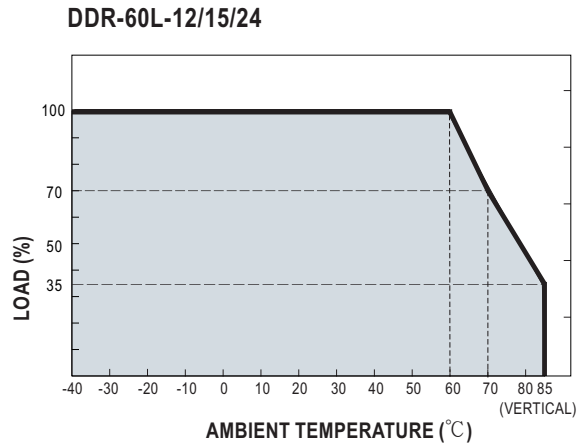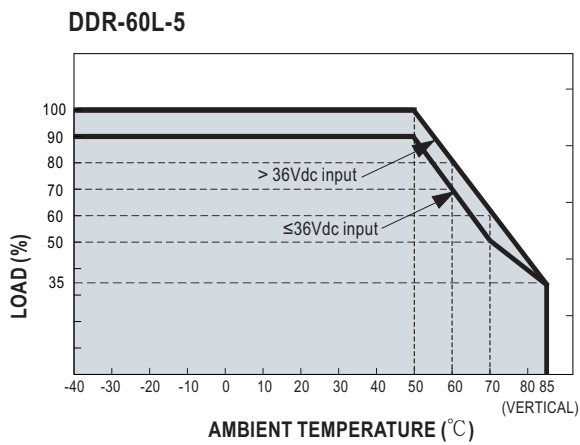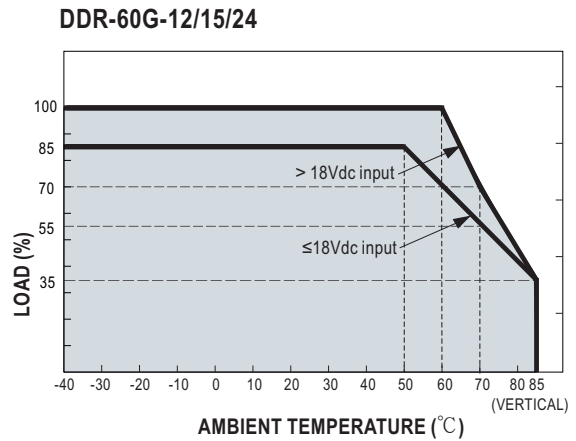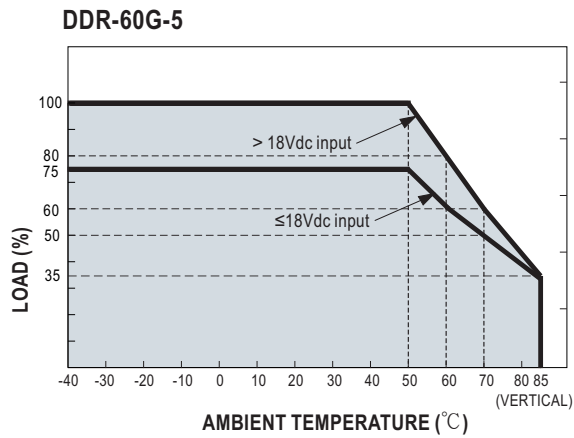

■ Output derating VS input voltage

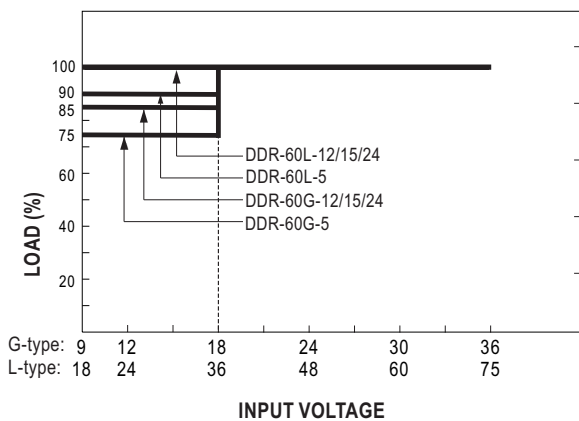

■ Mechanical Specification

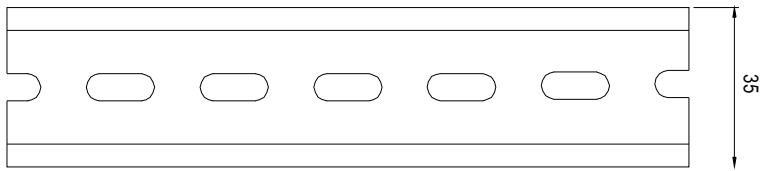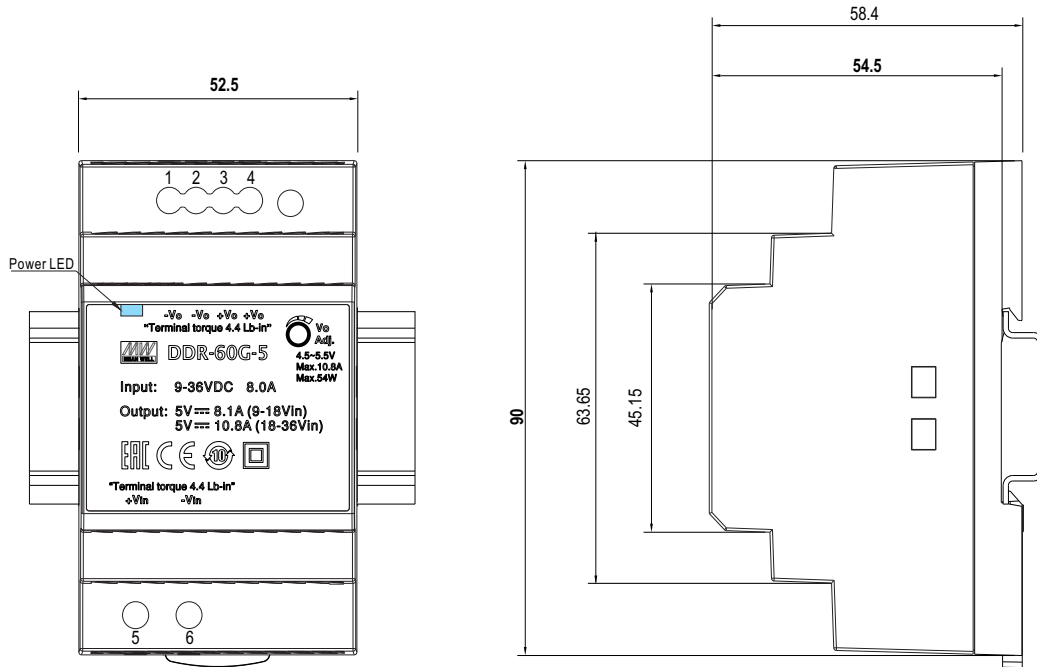

ADMISSIBLE DIN-RAIL: TS35/7.5 OR TS35/15

| Pin No. | Assignment |
|---------|---------------|
| 1,2 | DC output -Vo |
| 3,4 | DC output +Vo |
| 5 | DC input +Vin |
| 6 | DC input -Vin |

■ Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>