

# KBP2005 THRU KBP210


**SINGLE PHASE 2.0 AMPS.  
GLASS PASSIVATED  
BRIDGE RECTIFIERS**

**Voltage Range  
50 to 1000 Volts  
Current  
2.0 Amperes**

## FEATURES

- UL Recognized File # E-230084
- Ideal for printed circuit board
- Reliable low cost construction technique results in inexpensive product
- High temperature soldering guaranteed: 250°C/10 seconds at 5 lbs.(2.3kg) tension
- Small size, simple installation  
Leads solderable per MIL-STD-202, Method 208

## KBP

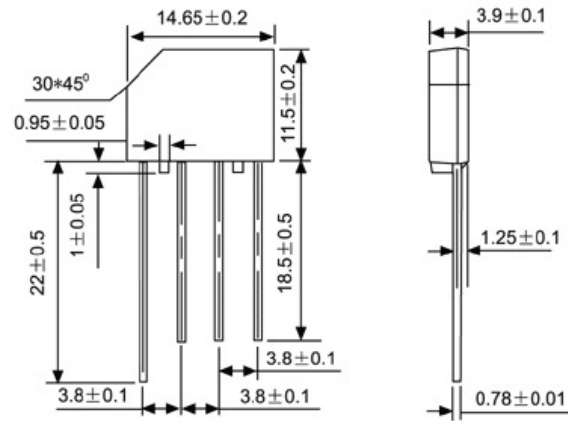

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%

Type Number		KBP 2005	KBP 201	KBP 202	KBP 204	KBP 206	KBP 208	KBP 210	UNITS
Maximum Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @ T <sub>A</sub> = 50°C	I <sub>F(AV)</sub>	2.0							A
Peak Forward Surge Current 8.3 ms Single Half Sine-wave Superimposed on Rated load (JEDEC method)	I <sub>FSM</sub>	60							A
Maximum Instantaneous Forward Voltage Drop Per leg @ 2A	V <sub>F</sub>	1.1							V
Maximum DC Reverse Current at Rated DC Blocking Voltage @ T <sub>A</sub> = 25°C @ T <sub>A</sub> = 125°C	I <sub>R</sub>	10 500							uA uA
Operating Temperature Range	T <sub>J</sub>	-55 to + 150							°C
Storage Temperature Range	T <sub>STG</sub>	-55 to + 150							°C

## RATING AND CHARACTERISTIC CURVES KBP2005 THRU KBP210

FIG. 1- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER BRIDGE ELEMENT

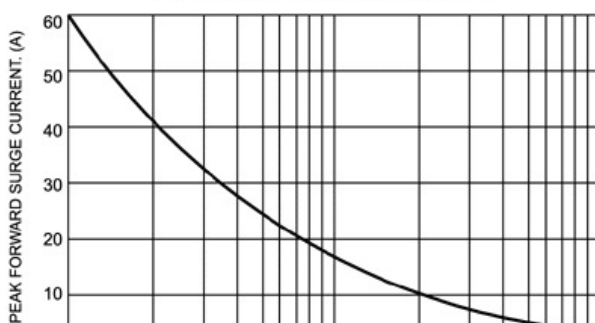


FIG. 2- MAXIMUM FORWARD CURRENT DERATING CURVE

