



## DIN Rail terminal blocks / DKK series

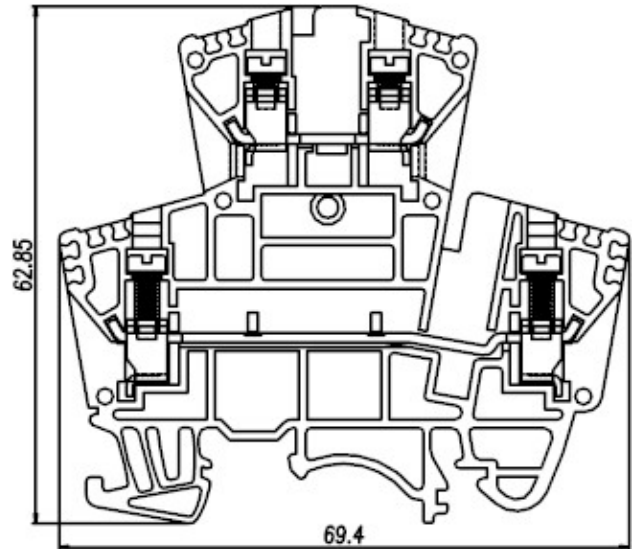

### DKK4

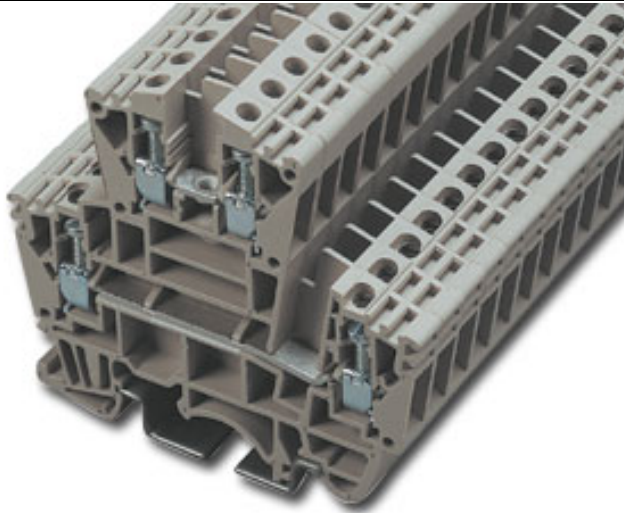

Approval		
<b>Technical Data</b>	UL	IEC
Rated voltage	300V	400V
Rated current	30A	32A
Conductor cross-section, solid (AWG / mm <sup>2</sup> )	22~10 / 0.5~4	
Conductor cross-section, flexible (AWG / mm <sup>2</sup> )	22~10 / 0.5~4	
Rated impulse withstand voltage	6KV	
Torque (N-m)	0.5	
Screw	M2.5	
Wire strip length	6mm	
Insulating material	PA	
TxHxW (mm)	6.1 x 62.8 x 69.4	
Optional color	Cat. No.	
●	DKK4-RD	
●	DKK4-BL	
●	DKK4-BK	
●	DKK4-OR	



	Accessories	Cat. No.
End cover		DKK2.5C
Partition		
Small partition		
Insertion bridge	2 way	
	3 way	
	4 way	
	10 way	
Insertion bridge	2 way	CSC-402
	3 way	CSC-403
	4 way	CSC-404
	10 way	CSC-410
Screw-on bridge	2 way	DS4-02P
	3 way	DS4-03P
	4 way	DS4-04P
	10 way	DS4-10P
Marking label		TM21
Mounting Rail		TS-35 / TS-32
Tool		0.4 x 2.5mm