

Front view


Electrical & Mechanical data

IP rating:IP67
Wire gauge:24AWG/0.25mm²
Connector contacts:Brass with gold plated
Contacts resistance:≤ 5 mΩ
Insulation resistance:≥100 MΩ
Orientation:Right angle
Coupling nut/screw:Brass with nickel plated screw
Cable jacket material:PUR
Insert/ Housing:TPU
Overmold/ Shell:TPU
Sealing:O-ring
Temperature Range:-25°C ~ + 80°C

	4 Pin	5 Pin	8 Pin
Rated current	4A	4A	2A
Rated voltage	250V	60V	30V

Order information

L-KLS15-M12 A-TR2 XX PG X

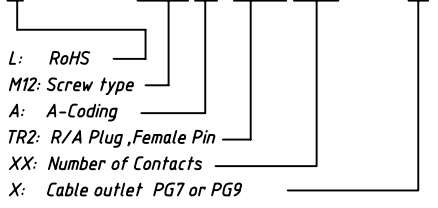

GENERAL TOLERANCE		ANGLE TOLERANCE	
X	±0.60	X	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	Description:
	Cable plug connector, Metal lock, Automation technology, M12,R/A
UNITS	
SHEET SIZE	
KLS P/N:	KLS15-M12A-TR2XXPGX

KLS ELECTRONIC CO., LTD.