





Dimensions

Lead Wire Type KPCM - 15E PCB Type KPCM - 15E-P



Schematic

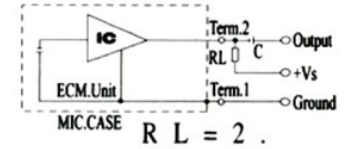

$$R L = 2 . 2 K \Omega$$

$$V_s = 4.5V$$

Specifications

- Sensitivity :See Model No. Table
- Impedance :2.2K Ω Max
- Standard Power Supply :4.5V DC
- Current Consumption :0.5mA Max
- Sensitivity Reduction :within-3dB at 3V
- S/N Ratio :more than 60dB
- Directivity :Omnidirectional

Sensitivity (0dB=1v/ub at 1kHz)	Sensitivity show method
-66 \pm 2dB	As 1 pa=10ub, therefore when it be pa or ub showed, there would be -20ub distance between them. For examples: -40dB(0dB=1v/pa)is equivalent to -60dB(0dB=1v/ub)
-64 \pm 2dB	
-62 \pm 2dB	
-60 \pm 2dB	
-58 \pm 2dB	
-56 \pm 2dB	
-54 \pm 2dB	
> -52dB	

Frequency Response

